


SAW Bandpass Filter 203650B



1. Features

- IF Bandpass Filter
- High Attenuation
- Single-Ended Operation
- DIP Package
- Maximum Storage Temperature Range : -40℃ ~ 85℃
- Electrostatics Sensitive Device (ESD)

2. Package Dimension

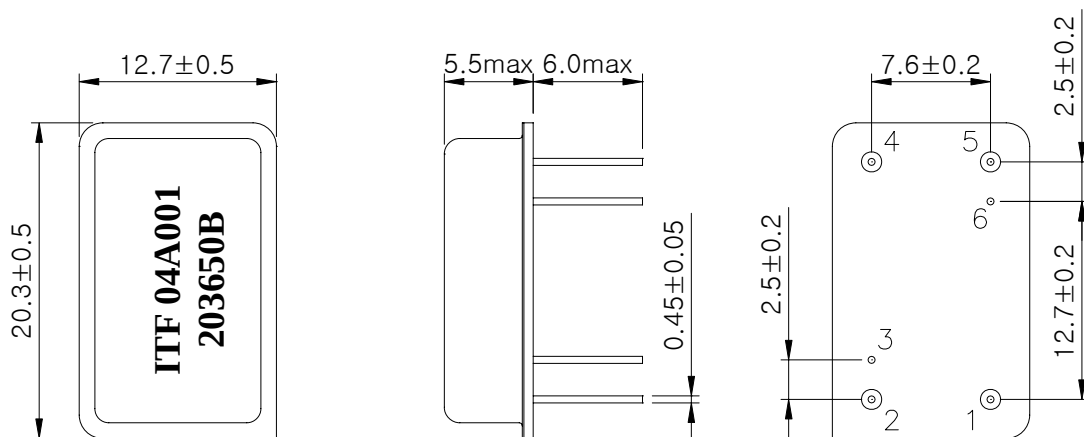

Package : D2012

Dimensions shown are nominal in millimeters

Base : Fe(SPCC), Au plating over Ni plated

Cap : Cu & Cr Alloy, Ni Plated

Termination : Kovar, Au Plated

Pin Configuration	
1	Input
5	Output
2, 4	Ground
3, 6	Case ground

 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	203650B	
		Rev. Date	2004-06-07	
		Rev.	NM3016-CS02	1/5

SAW Bandpass Filter 203650B



3. Specifications

Fo = 133.65 MHz

Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

		Minimum	Typical	Maximum
Center Frequency	MHz	133.5	133.65	133.8
Insertion Loss	dB	-	22.5	25.0
1dB Bandwidth	MHz	15.7	15.8	-
3dB Bandwidth	MHz	16.0	16.1	-
40dB Bandwidth	MHz	-	17.7	18.0
Amplitude Ripple (Fo +/- 7.5 MHz)	dB	-	0.8	1.0
Group Delay Variation (Fo +/- 7.5 MHz)	nsec	-	50	150
Absolute Delay	usec	-	1.95	-
Ultimate Rejection	dB	45	48	-
Temperature Coefficient of Frequency	ppm/°C	-	-72	-

Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature
- 3) All attenuation measurements are measured relative to insertion loss


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	203650B	
		Rev. Date	2004-06-07	
		Rev.	NM3016-CS02	2/5

SAW Bandpass Filter 203650B



4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

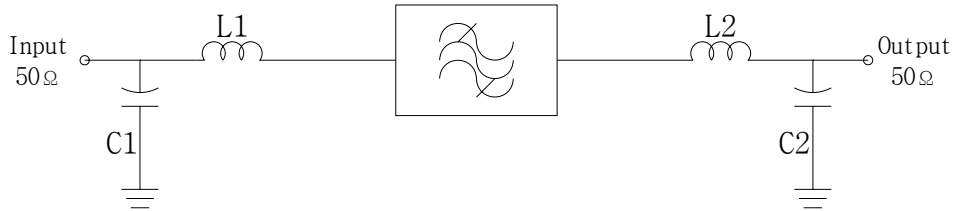

$$L1 = L2 = 27 \text{ nH}$$

$$C1 = 33 \text{ pF},$$

$$C2 = 22 \text{ pF}$$

5. Marking Configuration

ITF¹⁾ 04A001²⁾

203650B³⁾

1) Manufacturer name

2) Lot Number



3) Part Number

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	203650B	
		Rev. Date	2004-06-07	
		Rev.	NM3016-CS02	3/5

SAW Bandpass Filter 203650B







6. Typical Performance (at +25 °C)

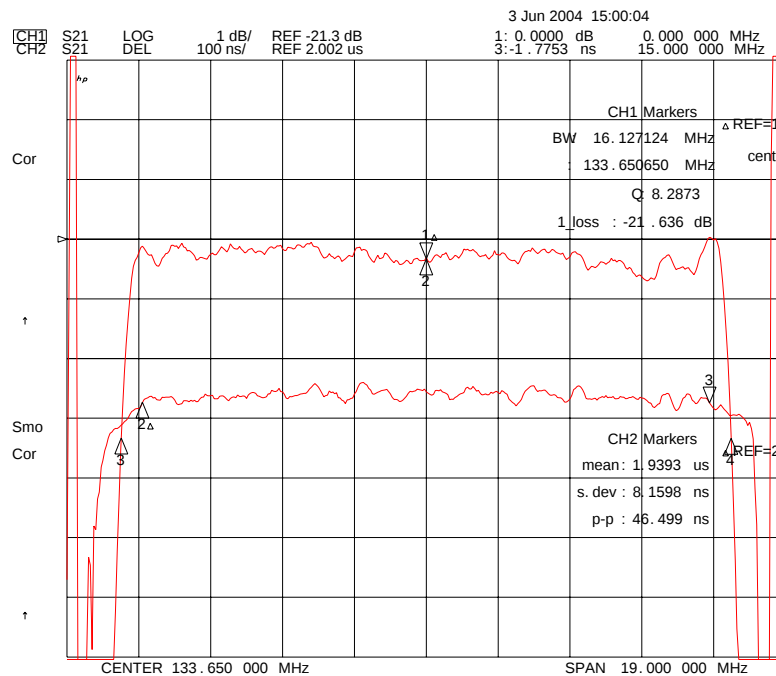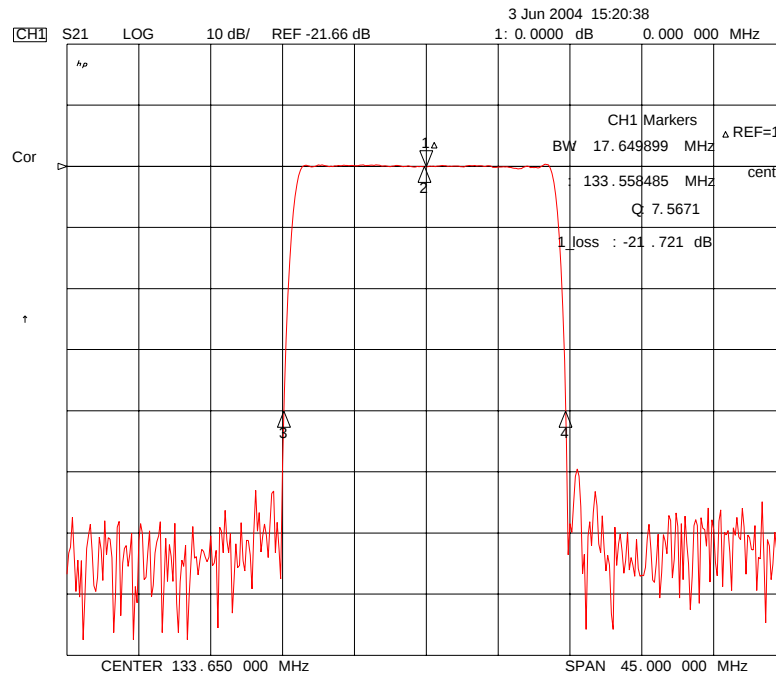

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809		Part No. 203650B	
			Rev. Date 2004-06-07	
			Rev. NM3016-CS02	4/5

SAW Bandpass Filter 203650B

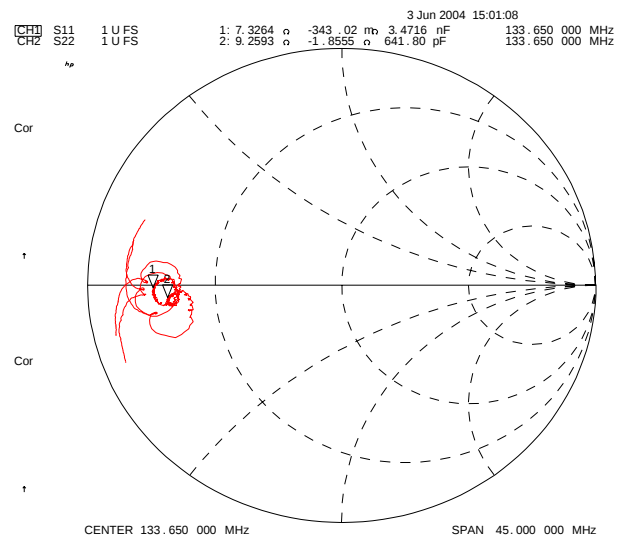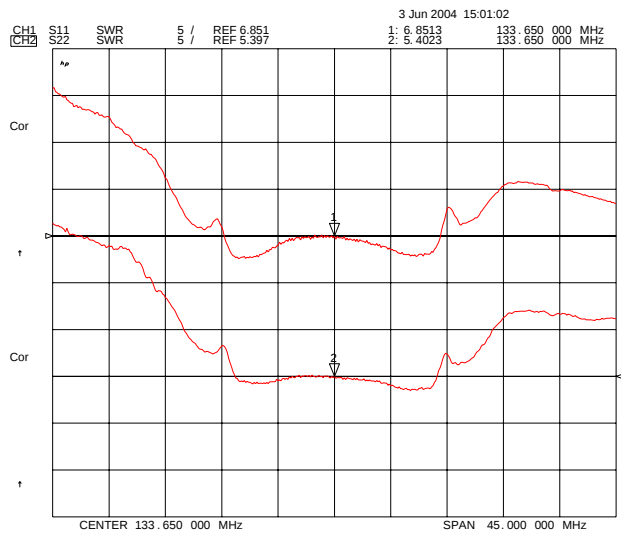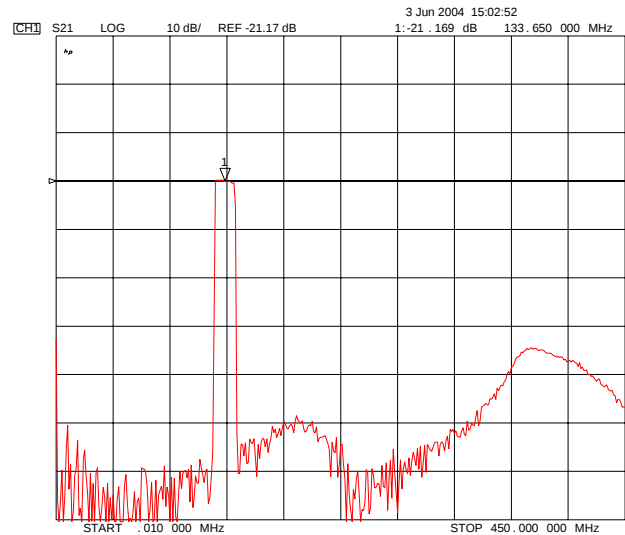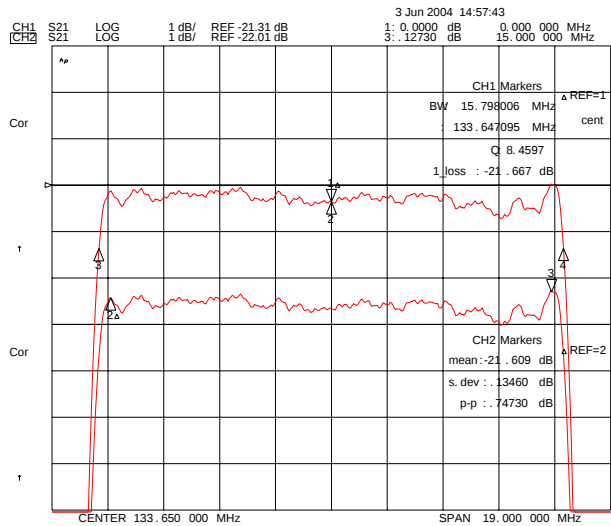

ITF Co., Ltd.
102-901, Bucheon Technopark 364,
Samjeong-Dong, Ojeong-Gu, Bucheon-City,
Gyeonggi-Do, Korea 421-809

Part No.

203650B

Rev. Date

2004-06-07

Rev.

NM3016-CS02

5/5