

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0850032983](#)
Status: **Active**
Overview: [din_41612](#)
Description: 2.54mm (.100") Pitch DIN 41612 Header, Style C/2, Right Angle, Through Hole, 0.25µm (10µ") Selective Gold (Au), 32 Circuits, Lead free

Documents:

[3D Model](#) [Product Specification PS-85003-0001 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980
 UL E29179

General

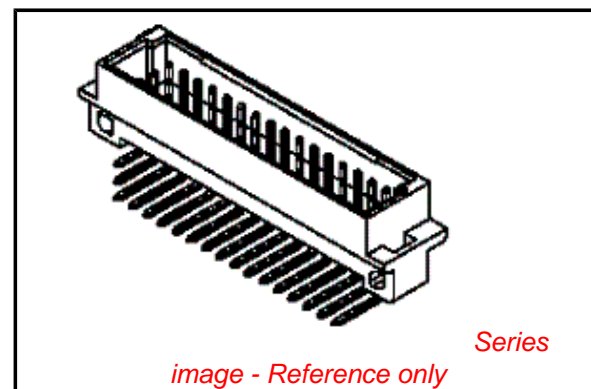
Product Family Backplane Connectors
 Series [85003](#)
 Application Daughtercard
 Component Type PCB Header
 Overview [din_41612](#)
 Product Name IEC 603-2/DIN 41612
 Style C/2

Physical

Circuits (Loaded) 32
 Circuits (maximum) 48
 Durability (mating cycles max) 50
 First Mate / Last Break No
 Flammability 94V-0
 Guide to Mating Part No
 Keying to Mating Part Yes
 Number of Columns 16
 Number of Pairs Open Pin Field
 Number of Rows 3
 Orientation Right Angle
 PC Tail Length (in) 0.118 In
 PC Tail Length (mm) 3.00 mm
 PCB Locator No
 PCB Retention Yes
 PCB Thickness Recommended (in) 0.062 In
 PCB Thickness Recommended (mm) 1.60 mm
 Packaging Type Tray
 Pitch - Mating Interface (in) 0.100 In
 Pitch - Mating Interface (mm) 2.54 mm
 Pitch - Term. Interface (in) 0.100 In
 Pitch - Term. Interface (mm) 2.54 mm
 Polarized to PCB Yes
 Stackable No
 Surface Mount Compatible (SMC) No
 Temperature Range - Operating -55°C to +125°C
 Termination Interface: Style Through Hole

Electrical

Current - Maximum per Contact 2.5A
 Data Rate 622.0 Mbps
 Voltage - Maximum 250V AC (RMS)



EU RoHS

ELV and RoHS Compliant
REACH SVHC
 Not Reviewed
Halogen-Free Status
 Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[85003Series](#)

Mates With

[85042](#) , [85052](#) Backplane Header

Solder Process Data

Duration at Max. Process Temperature (seconds)	10
Lead-free Process Capability	Wave Capable (TH only)
Process Temperature max. C	260

Material Info**Reference - Drawing Numbers**

Product Specification	PS-85003-0001
Sales Drawing	SD-85003-2983

This document was generated on 05/17/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

VIEW ON MATING SIDE

○	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C
D																
○	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A

16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 -

A = 16 STANDARD CONTACTS L = 3
 C = 16 STANDARD CONTACTS L = 3
 S = 32 TOTAL NUMBER OF CONTACTS

MARKING	STANDARD
PERFORMANCE LEVEL	G3/0 = CONTACT AREA LEVEL 3 / TERMINATION TIN
FLUX PROOF	NO
FIXING CLIP	NO
DIMENSIONS	SD-85003-0002 SHT 1

C	G3/0	c1-16
A	G3/0	a1-16
CONTACT SYMBOL	PERFORMANCE LEVEL	CONTACT POSITION NUMBER

IEC NO. 1 2004-0202 CHINA C.C. 08/12/03 APPR. C.L. 08/12/03	QUALITY SYMBOLS MAJOR CRITICAL	GENERAL TOLERANCES: UNLESS SPECIFIED: mm INCH		SCALE	DESIGN UNITS <input checked="" type="checkbox"/> mm <input type="checkbox"/> INCH	THIRD ANGLE PROJECTION <input type="checkbox"/> mm <input type="checkbox"/> INCH <input checked="" type="checkbox"/> mm ONLY	DIMENSIONS: SHT REV
		4 PLACES ±0. ±. 3 PLACES ±0. ±. 2 PLACES ±0. ±. 1 PLACE ±0. ±.	DRAWN BY & DATE S.S. 08/12/03 CHECKED BY & DATE G.L. 08/12/03 APPROVED BY & DATE G.L. 08/12/03	TITLE: 48 POS MALE CONNECTOR ACCORDING DIN 41612 STYLE C/2 CONTACTS ARRANGEMENT		MOLEX INCORPORATED	
A	REV DESCRIPTION	ANGULAR: ± *		CAD FILENAME SD-85003-2983.S0	MATERIAL NO. 85003-2983	DRAWING NO. SD-85003-2983	SIZE D
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.					

VIEW ON MATING SIDE



○	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C
D															
○	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A

16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 -

A = 16 STANDARD CONTACTS L = 3
 C = 16 STANDARD CONTACTS L = 3
 S = 32 TOTAL NUMBER OF CONTACTS

MARKING	STANDARD
PERFORMANCE LEVEL	G3/0 = CONTACT AREA LEVEL 3 / TERMINATION TIN
FLUX PROOF	NO
FIXING CLIP	NO
DIMENSIONS	SD-85003-0002 SHT 1

C	G3/0	c1-16
A	G3/0	a1-16
CONTACT SYMBOL	PERFORMANCE LEVEL	CONTACT POSITION NUMBER

IEC NO. 1 2004-0202 CHNG. C.L. 08/12/03 APPR. C.L. 08/12/03	QUALITY SYMBOLS MAJOR  CRITICAL 	GENERAL TOLERANCES: UNLESS SPECIFIED:		SCALE	DESIGN UNITS <input checked="" type="checkbox"/> mm <input type="checkbox"/> INCH	THIRD ANGLE PROJECTION <input type="checkbox"/> mm <input checked="" type="checkbox"/> INCH <input type="checkbox"/> mm ONLY	DIMENSIONS:	SHT	REV	
		4 PLACES ±0. ±. 3 PLACES ±0. ±. 2 PLACES ±0. ±. 1 PLACE ±0. ±.	DRAWN BY & DATE S.S. 08/12/03 CHECKED BY & DATE G.L. 08/12/03 APPROVED BY & DATE G.L. 08/12/03	TITLE: 48 POS MALE CONNECTOR ACCORDING DIN 41612 STYLE C/2 CONTACTS ARRANGEMENT		MOLEX INCORPORATED		CAD FILENAME SD-85003-2983.S0	MATERIAL NO. 85003-2983	DRAWING NO. SD-85003-2983
A	REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.						SIZE D