




**Standard
Metallized
Polyester
Capacitors**

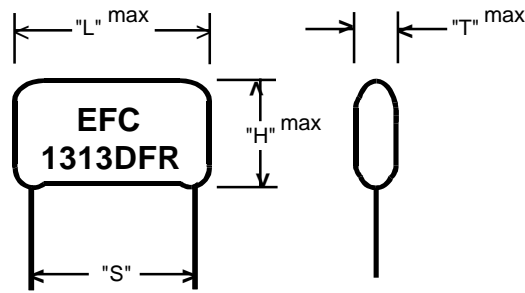

1313DFR

**Epoxy Dipped
(Radial Leads)**

Lead Specs. - Tinned Copperweld

L	S	DIA.
10.0	7.5	0.6
12.5	10.0	0.6
18.0	15.0	0.8
26.0	22.5	0.8
31.0	27.5	0.8
44.0	38.0	0.8

(All dimensions in millimeters)

DIMENSIONS and RATINGS

Cap.	1313DFR-3 100 VDC			1313DFR-3 160 VDC			1313DFR-3 250 VDC			1313DFR-3 400 VDC			1313DFR-3 630 VDC			1313DFR-3 1000 VDC				
	μF	T	H	L	T	H	L	T	H	L	T	H	L	T	H	L	T	H	L	
.001	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
.0012	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
.0015	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
.0022	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
.0027	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
.0039	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
.0047	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
.0056	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
.0068	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
.0082	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
.01	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
.012	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
.015	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
.018	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
.022	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
.027	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
.033	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
.039	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
.047	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
.056	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
.068	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
.082	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
.1	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
.12	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
.15	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
.18	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
.22	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
.27	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
.33	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
.39	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
.47	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
.56	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
.68	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
.82	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
1.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
1.2	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
1.5	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
1.8	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
2.2	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
2.7	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
3.3	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
3.9	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
4.7	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
5.6	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		
6.8	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	12.5		

EFC will manufacture to any non-standard value and size. Please consult factory for special requirements.

ELECTRONIC FILM CAPACITORS, INC.

Reidville Industrial Park * 41 Interstate Lane * WATERBURY, CONNECTICUT 06705

Phone (203) 755-5629 * E-Mail: efc@filmcapacitors.com * FAX (203) 755-0659