



Micro Commercial Components

Micro Commercial Components  
20736 Marilla Street Chatsworth  
CA 91311

Phone: (818) 701-4933

Fax: (818) 701-4939

## BC337-16/25/40 BC338-16/25/40

### Features

- Capable of 0.625Watts of Power Dissipation.
- Collector-current 0.8A
- Collector-base Voltage :  $V_{CBO}=50V(BC337)$  ,  $V_{CBO}=30V(BC338)$
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0

### Maximum Ratings

- Operating temperature :  $-55^{\circ}C$  to  $+150^{\circ}C$
- Storage temperature :  $-55^{\circ}C$  to  $+150^{\circ}C$

### Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Max	Units
--------	-----------	-----	-----	-------

#### OFF CHARACTERISTICS

$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage ( $I_C=10mA$ , $I_B=0$ )		---	Vdc
		BC337 BC338	45 25	
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage ( $I_C=100\mu A$ , $I_E=0$ )		---	Vdc
		BC337 BC338	50 30	
$V_{(BR)EBO}$	Collector-Emitter Breakdown Voltage ( $I_E=10\mu A$ , $I_C=0$ )	5.0	---	Vdc
$I_{CBO}$	Collector Cutoff Current ( $V_{CB}=45Vdc$ , $I_E=0$ )		0.1	$\mu A$
		BC337 BC338	---	0.1
$I_{CEO}$	Collector Cutoff Current ( $V_{CE}=40Vdc$ , $I_B=0$ )		0.2	$\mu A$
		BC337 BC338	---	0.2
$I_{EBO}$	Emitter Cutoff Current ( $V_{EB}=4.0Vdc$ , $I_C=0$ )	---	0.1	$\mu A$

#### ON CHARACTERISTICS

$h_{FE(2)}$	DC Current Gain ( $I_C=300mA$ , $V_{CE}=1.0Vdc$ )	60	---	--
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage ( $I_C=500mA$ , $I_B=50mA$ )	---	0.7	Vdc
$V_{BE(sat)}$	Base-Emitter Saturation Voltage ( $I_C=500mA$ , $I_B=50mA$ )	---	1.2	Vdc

#### SMALL SIGNAL CHARACTERISTICS


$f_T$	Current-Gain-Bandwidth Product ( $V_{CE}=5.0V$ , $f=100MHz$ , $I_C=10mA$ )	210	---	MHz
-------	---	-----	-----	-----

#### hFE CLASSIFICATION

Classification	16	25	40
$h_{FE(1)}$	100~250	160~400	250~630
Marking Code	A 011	B 011	C 011

## NPN Plastic-Encapsulate Transistors

### TO-92

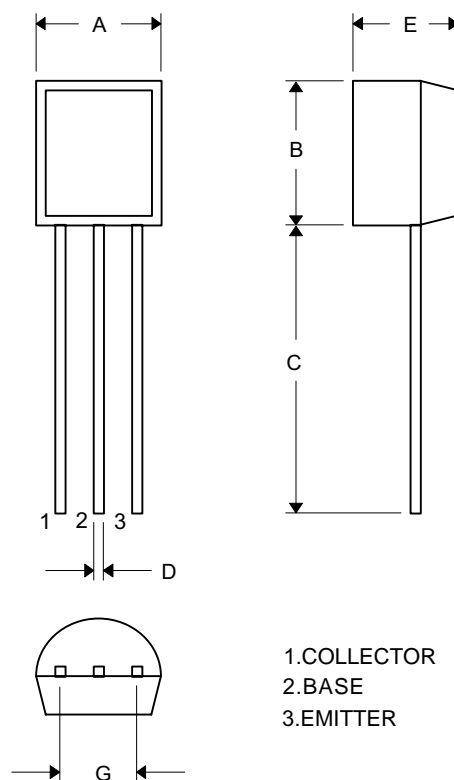


#### DIMENSIONS


DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.170	.190	4.33	4.83	
B	.170	.190	4.30	4.83	
C	.550	.590	13.97	14.97	
D	.010	.020	0.36	0.56	
E	.130	.160	3.30	3.96	
G	.010	.104	2.44	2.64	

**Typical Characteristics**


**BC337**

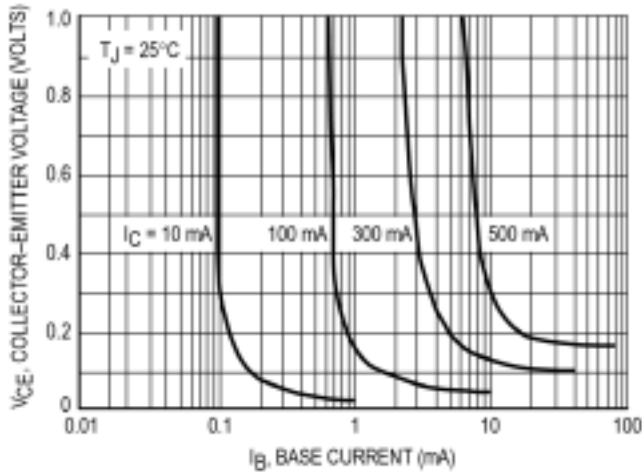


**Saturation Region**

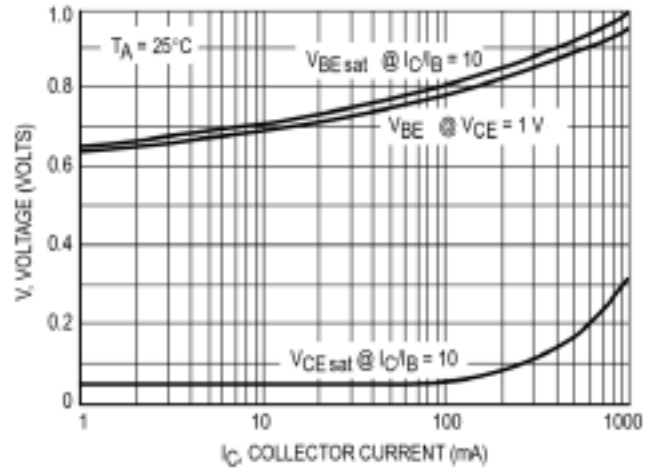


**"On" Voltages**

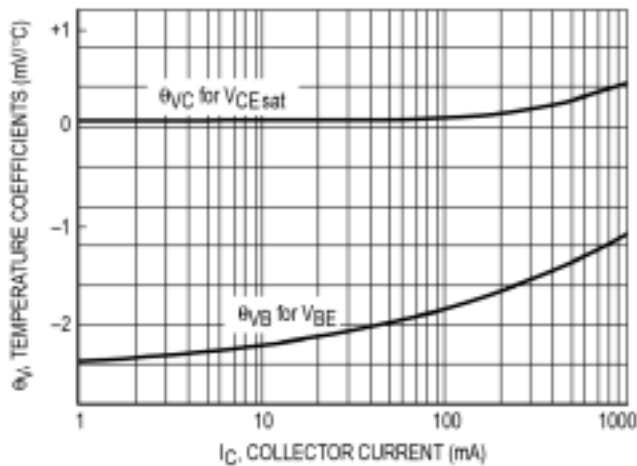


**Temperature Coefficients**

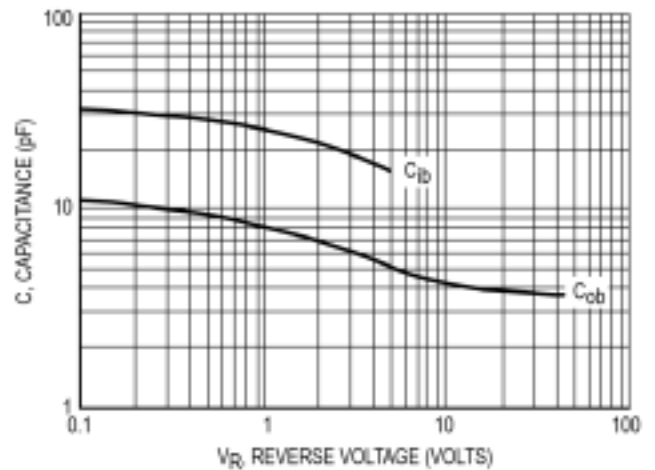

**Capacitances**

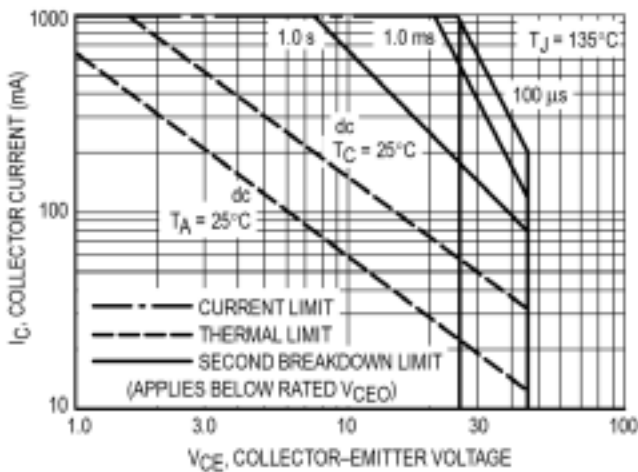

**Active Region — Safe Operating Area**

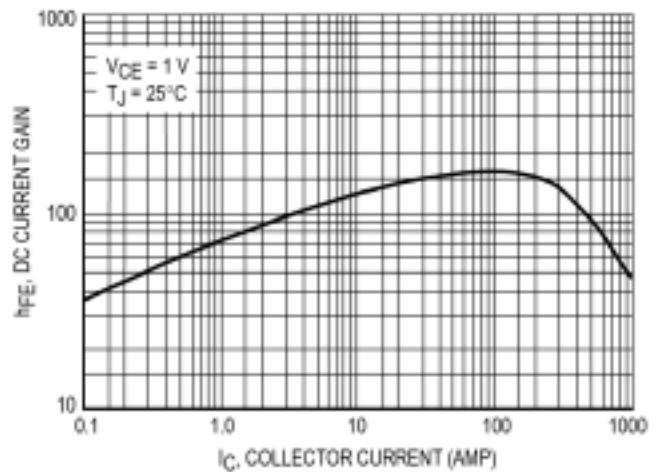

**DC Current Gain**



TM

Micro Commercial Components

**\*\*\*IMPORTANT NOTICE\*\*\***

*Micro Commercial Components Corp.* reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

**\*\*\*APPLICATIONS DISCLAIMER\*\*\***

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.