



25L6-GT—12L6-GT—50L6-GT

BEAM PENTODE

For AF Power Amplifier Applications

25L6-GT
12L6-GT
50L6-GT

www.DataSheet4U.com ET-T867
Page 1
7-54

DESCRIPTION AND RATING

The 25L6-GT is a beam pentode designed for use in the audio-frequency power output stage of radio and television receivers. Features include high power sensitivity and high efficiency at relatively low plate and screen voltages.

The 12L6-GT, 25L6-GT, and 50L6-GT are alike except for heater ratings and heater-cathode voltage ratings. The 50L6-GT is particularly suited for use in a-c/d-c receivers; while the 12L6-GT, as a result of its controlled heater warm-up characteristic, is especially suited for use in television receivers which employ series-connected heaters. When the 12L6-GT is used in conjunction with other 600-milliamper types which exhibit essentially the same heater warm-up characteristic, heater voltage surges across the individual tubes are minimized during the warm-up period.

GENERAL

ELECTRICAL

Cathode—Coated Unipotential

	12L6-GT	25L6-GT	50L6-GT
Heater Voltage, AC or DC	12.6	25.0	50.0 Volts
Heater Current	0.6	0.3	0.15 Amperes
Heater Warm-up Time*	10.5	—	— Seconds

MECHANICAL

Mounting Position—Any

Envelope—T-9, Glass

□ Base—B6-81 or B7-7, Intermediate Shell Octal
or B6-84 or B7-59, Short Intermediate Shell Octal


MAXIMUM RATINGS

DESIGN-CENTER VALUES

Plate Voltage	200	Volts
Screen Voltage	125	Volts
Plate Dissipation	10	Watts
Screen Dissipation	1.25	Watts

	12L6-GT	25L6-GT	50L6-GT
Heater-Cathode Voltage			
Heater Positive with Respect to Cathode			
DC Component	100	—	Volts
Total DC and Peak	200	90	Volts
Heater Negative with Respect to Cathode			
Total DC and Peak	300	90	Volts
Grid Circuit Resistance			
With Fixed Bias	0.1	0.1	Megohms
With Cathode Bias	0.5	0.5	Megohms

BASING DIAGRAM




RETMA 7AC

TERMINAL CONNECTIONS

- Pin 1—No Connection†
- Pin 2—Heater
- Pin 3—Plate
- Pin 4—Grid Number 2 (Screen)
- Pin 5—Grid Number 1
- Pin 7—Heater
- Pin 8—Cathode and Beam Plates

PHYSICAL DIMENSIONS

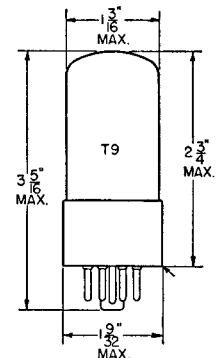

RETMA 9-11 or 9-41

GENERAL ELECTRIC

Supersedes ET-T400A dated 6-50 and ET-T413A dated 1-50

CHARACTERISTICS AND TYPICAL OPERATION


CLASS A₁ AMPLIFIER

Plate Voltage	110	200	Volts
Screen Voltage	110	125	Volts
Grid-Number 1 Voltage	-7.5	—	Volts
Cathode-Bias Resistor	—	180	Ohms
Peak AF Grid-Number 1 Voltage	7.5	8.5	Volts
Plate Resistance, approximate	13000	28000	Ohms
Transconductance	8000	8000	Micromhos
Zero-Signal Plate Current	49	46	Milliamperes
Maximum-Signal Plate Current	50	47	Milliamperes
Zero-Signal Screen Current	4.0	2.2	Milliamperes
Maximum-Signal Screen Current	10	8.5	Milliamperes
Load Resistance	2000	4000	Ohms
Total Harmonic Distortion, approximate	10	10	Percent
Maximum-Signal Power Output	2.1	3.8	Watts


* Heater warm-up time is defined as the time required in the circuit shown at the right for the voltage across the heater terminals to increase from zero to the heater test voltage (V_1). For this type, $E=50$ volts (RMS or DC), $V_1=10.0$ volts (RMS or DC), and $R=63$ ohms.

□ † Pin 1 omitted on bases B6=81 and B6=84.


□ Indicates an additional rating.

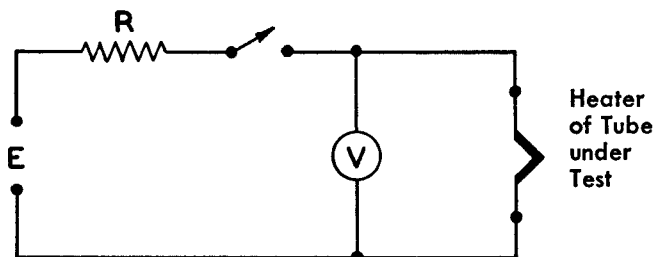


AVERAGE PLATE CHARACTERISTICS

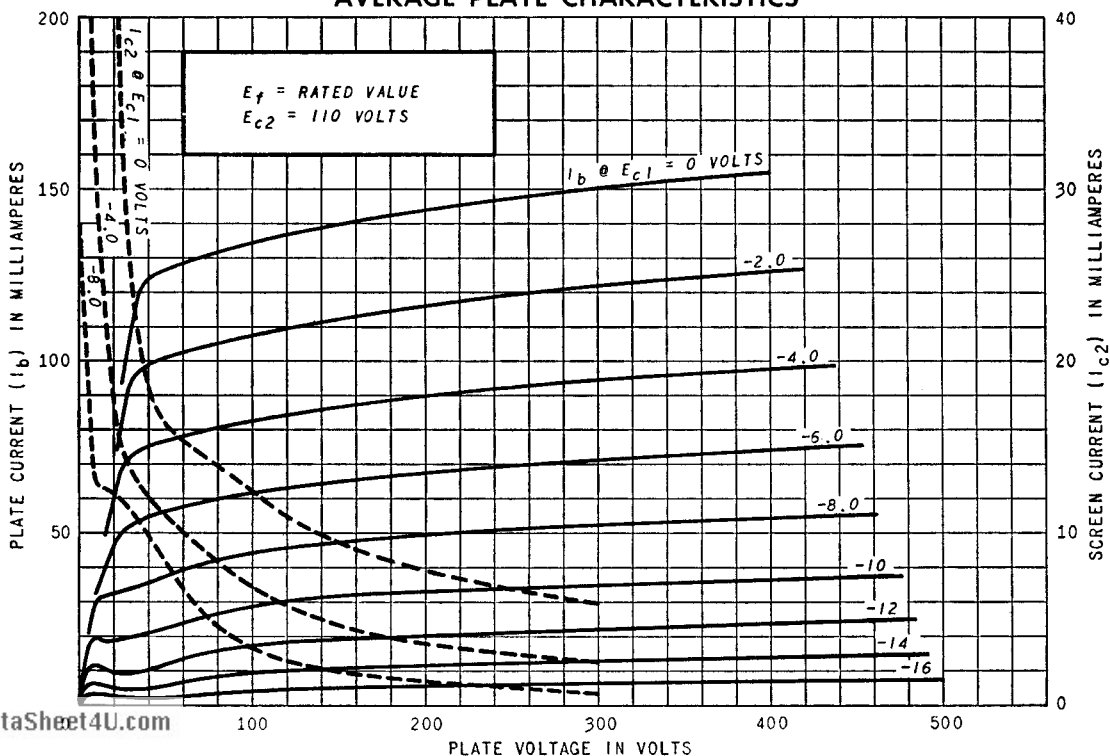

AVERAGE PLATE CHARACTERISTICS

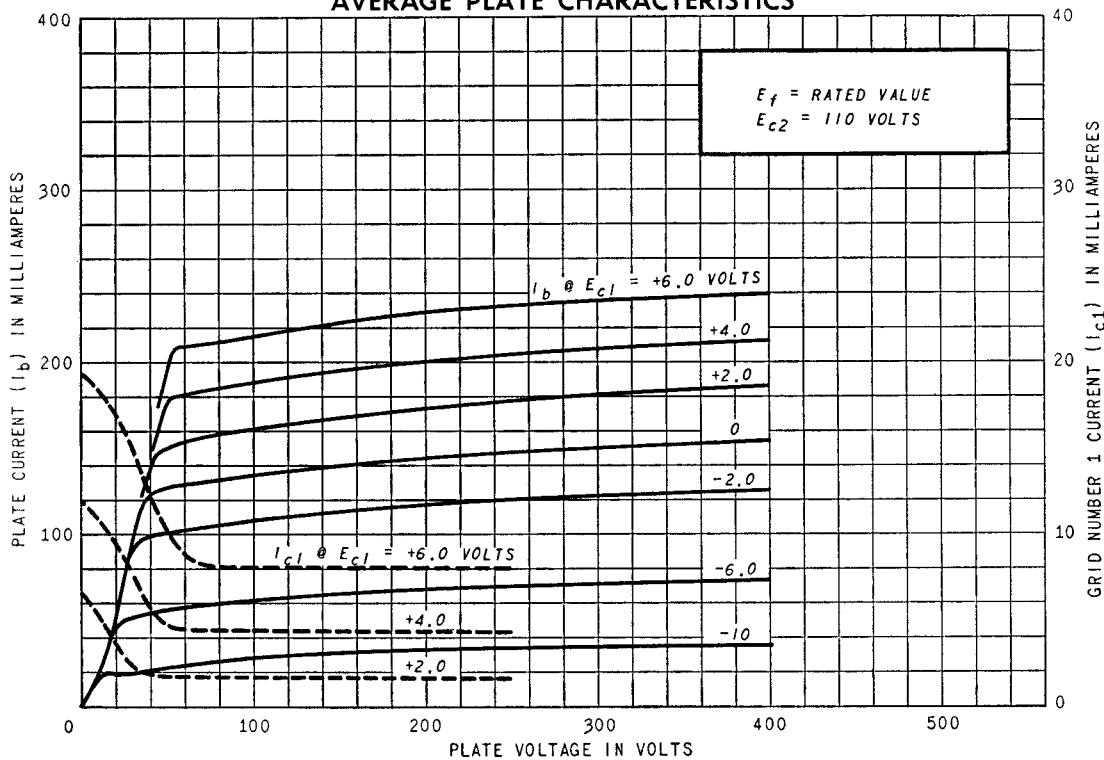


AVERAGE PLATE CHARACTERISTICS

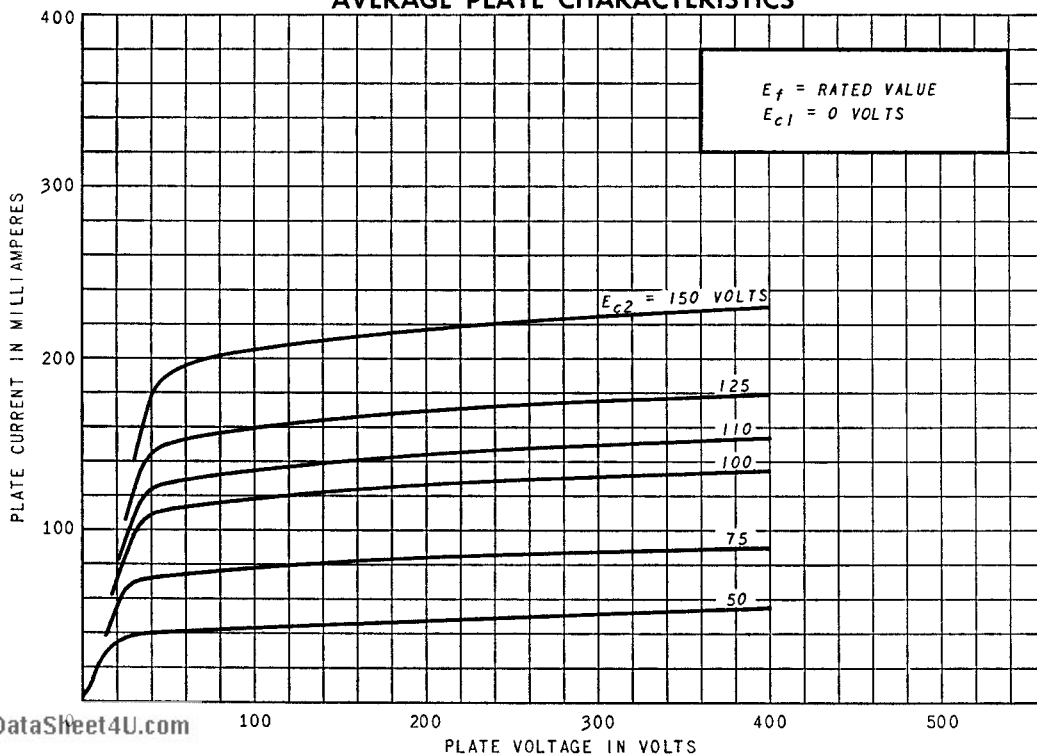


AVERAGE TRANSFER CHARACTERISTICS

www.DataSheet4U.com

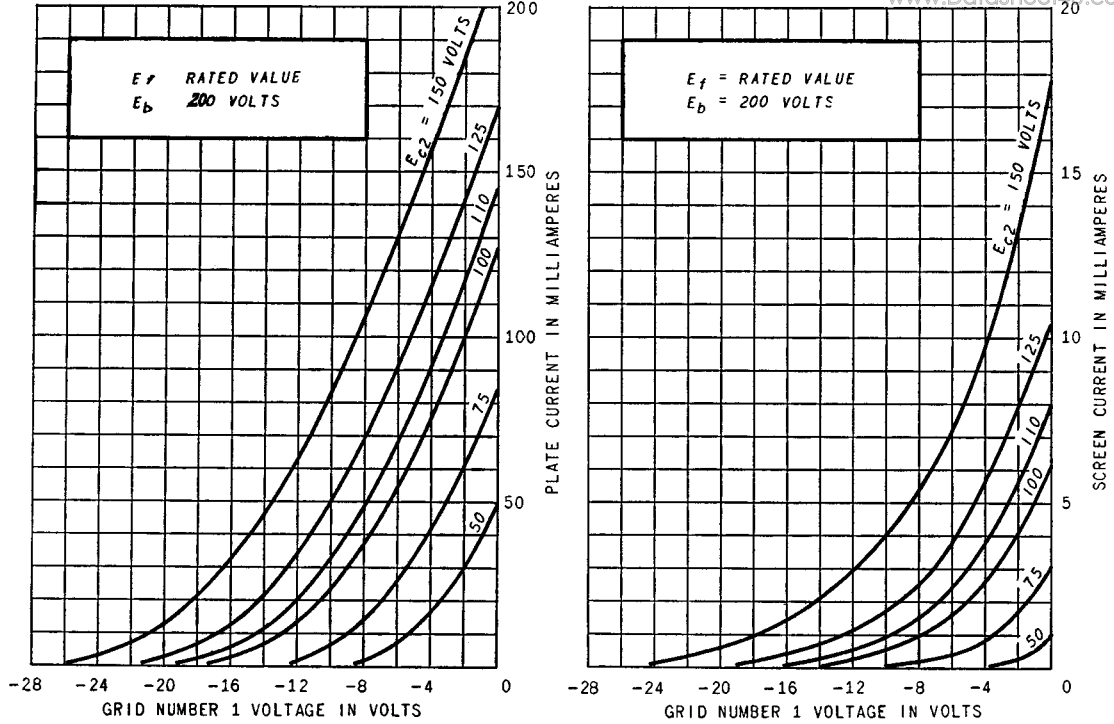

OPERATION CHARACTERISTICS

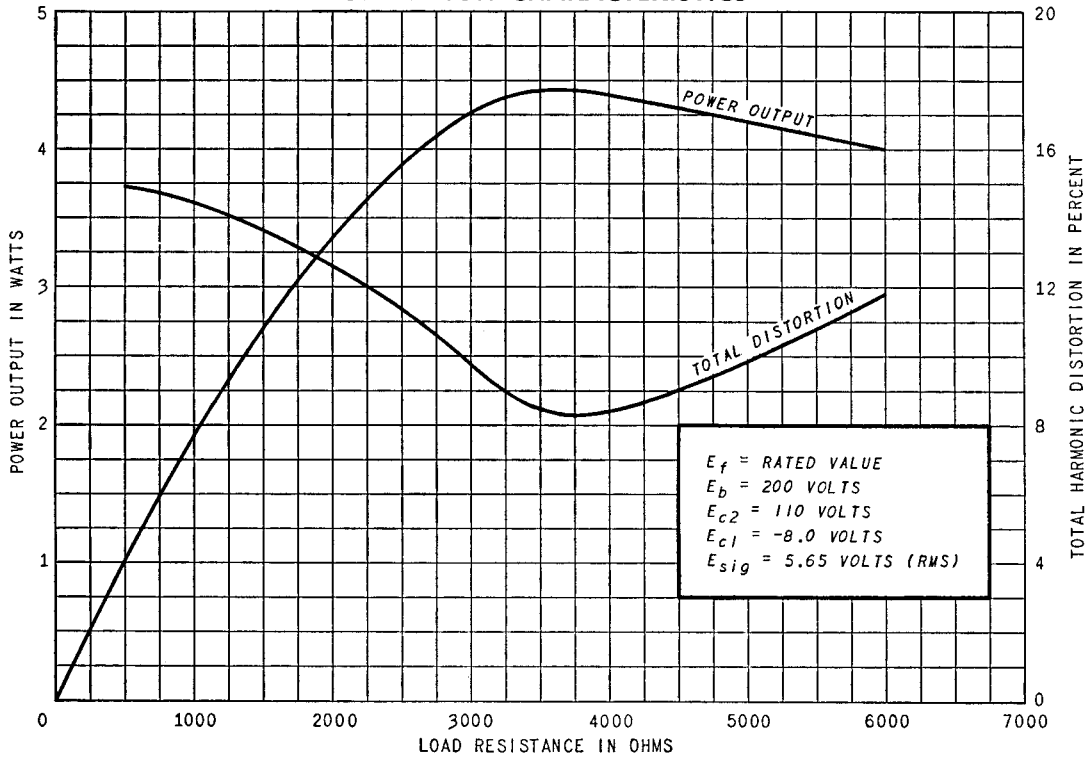

TUBE DEPARTMENT



Schenectady 5, N. Y.