
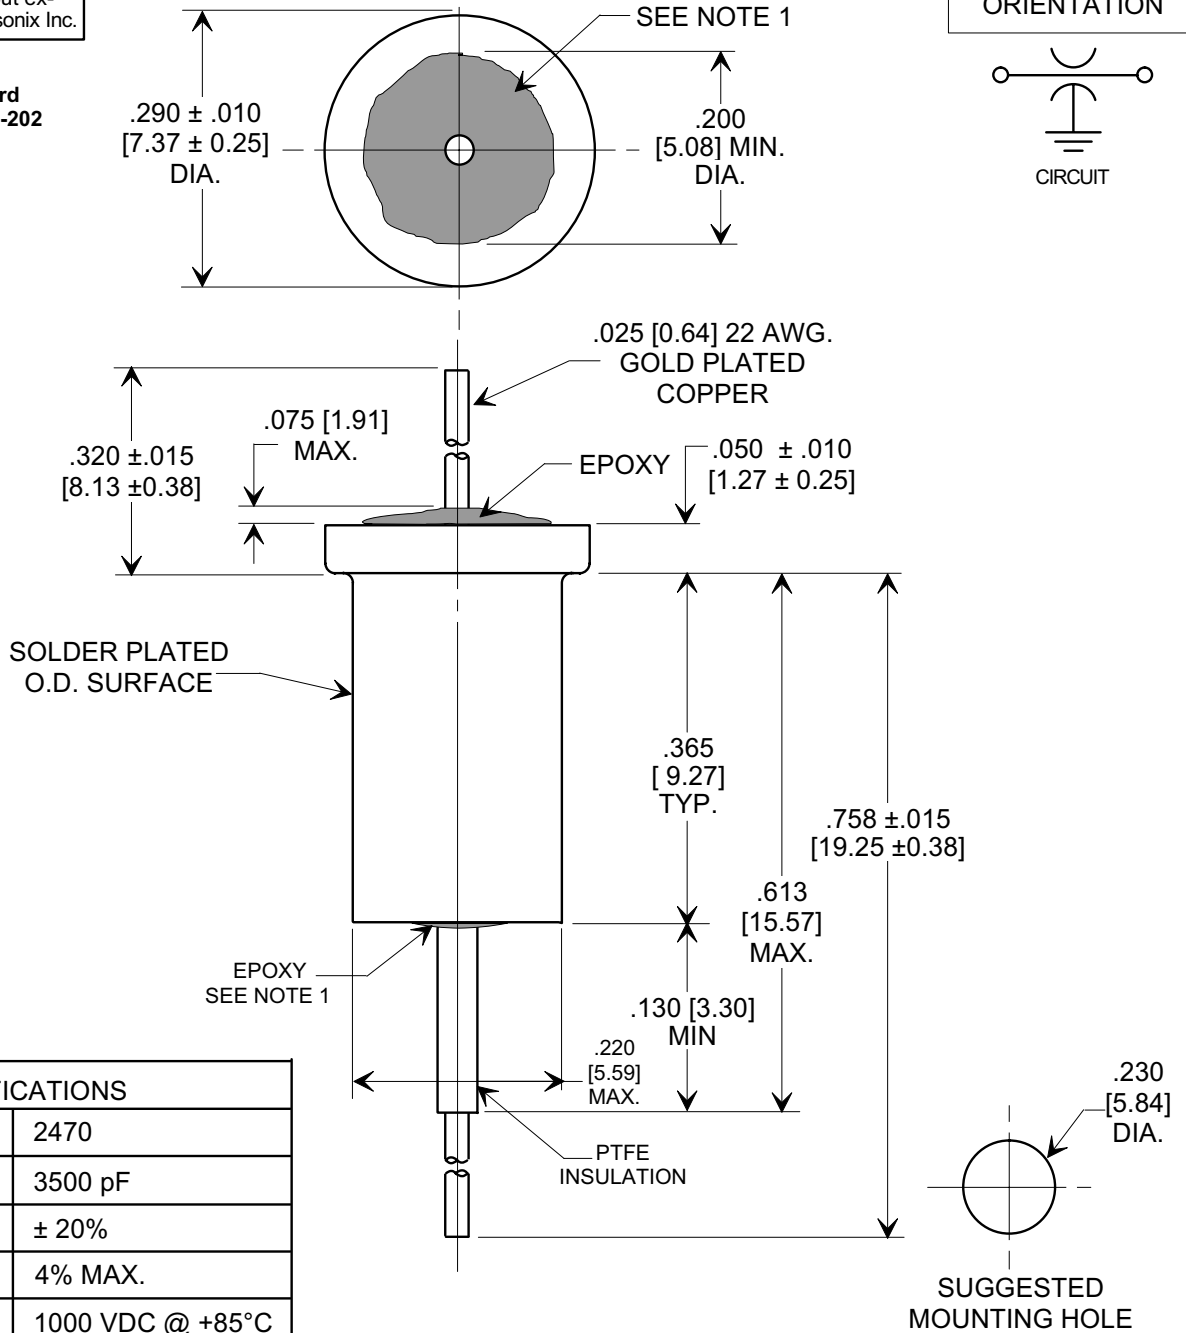



MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.

Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.



NOTE:

1. EPOXY COATED INSULATION BANDS: COVERAGE OF TOP AS SHOWN, COVERAGE OF BOTTOM .100" [2.54] DIA. MIN. (MAY OVERLAP ONTO OD SURFACE .020" [0.51] MAX.)

SPECIFICATIONS

STYLE	2470
CAP. VALUE:	3500 pF
CAP. TOL.:	± 20%
D.F.:	4% MAX.
RATING:	1000 VDC @ +85°C
OPERATING RANGE:	-55°C TO +85°C
DWV (25°C):	1500 VDC
I.R.:	10 G Ω MIN.
IDC:	10 A

X-2015 Rev-0	REVISION RECORD	
	Original Release	
	WAS SK 8188-666. SM 02-07-06	
	20060202-11-03	0

--TOLERANCES-- Unless Otherwise Specified		Title	
DECIMAL ± .031 [0.79]		SHOULDER FEED-THRU	
ANGLES ±		Drawn	Scale
TUSONIX TUCSON, ARIZONA		S.M. 01-12-06	5 X
		Approved	
A		T.C. 01-12-06	
		2470-005	