

531-340/352 Kat
+



Type	Side Walls	Pg Knockouts	Inside Height	Ref. No.	Unit
POLYSTYRENE - COVER GREY RAL 7035					
PS 2518- 9	with Pg		75 mm	115-408	8/1
PS 2518-11	with Pg		97 mm	115-908	6/1
PS 2518-16	with Pg		150 mm	114-408	4/1
PS 2518-21	with Pg		200 mm	114-908	2/1
PS 2518- 9-o	smooth		75 mm	110-408	8/1
PS 2518-11-o	smooth		97 mm	110-908	6/1
PS 2518-16-o	smooth		150 mm	109-408	4/1
PS 2518-21-o	smooth		200 mm	109-908	2/1
POLYSTYRENE - COVER TRANSPARENT					
PS 2518- 9-t	with Pg		75 mm	116-008	8/1
PS 2518-11-t	with Pg		97 mm	116-508	6/1
PS 2518-16-t	with Pg		150 mm	117-008	4/1
PS 2518-21-t	with Pg		200 mm	117-508	2/1
PS 2518- 9-to	smooth		75 mm	111-008	8/1
PS 2518-11-to	smooth		97 mm	111-508	6/1
PS 2518-16-to	smooth		150 mm	112-008	4/1
PS 2518-21-to	smooth		200 mm	112-508	2/1
POLYCARBONATE - COVER GREY RAL 7035					
PC 2518- 9	with Pg		75 mm	125-408	8/1
PC 2518-11	with Pg		97 mm	125-908	6/1
PC 2518-16	with Pg		150 mm	126-408	4/1
PC 2518-21	with Pg		200 mm	126-908	2/1
POLYCARBONATE - COVER TRANSPARENT					
PC 2518- 9-t	with Pg		75 mm	135-008	8/1
PC 2518-11-t	with Pg		97 mm	135-508	6/1
PC 2518-16-t	with Pg		150 mm	136-008	4/1
PC 2518-21-t	with Pg		200 mm	136-508	2/1

TK 2518
Empty
Enclosure
254 x 180^{mm}
Type of
Protection
IP 66


Knockouts: = Pg 16/11 = Pg 16 = Pg 21/16 = Pg 29/21				Max. number of Pg drill holes per box side		
				Pg	A	B
				7	33	18
				9	20	10
				11	18	10
				13.5	16	8
				16	14	8
				21	6	3
				29	4	2
				36	3	2

All dimensions in millimeters

TK 2518
Its dimensions
also allow
large-dimensioned
components
to be used.

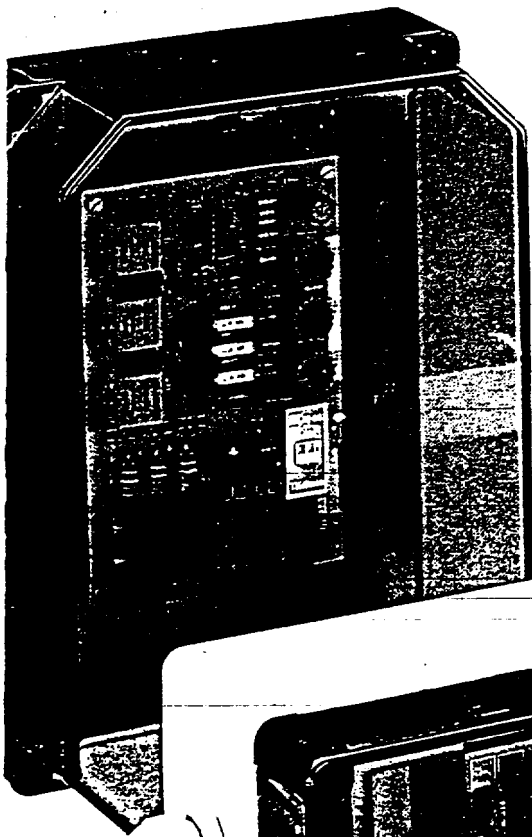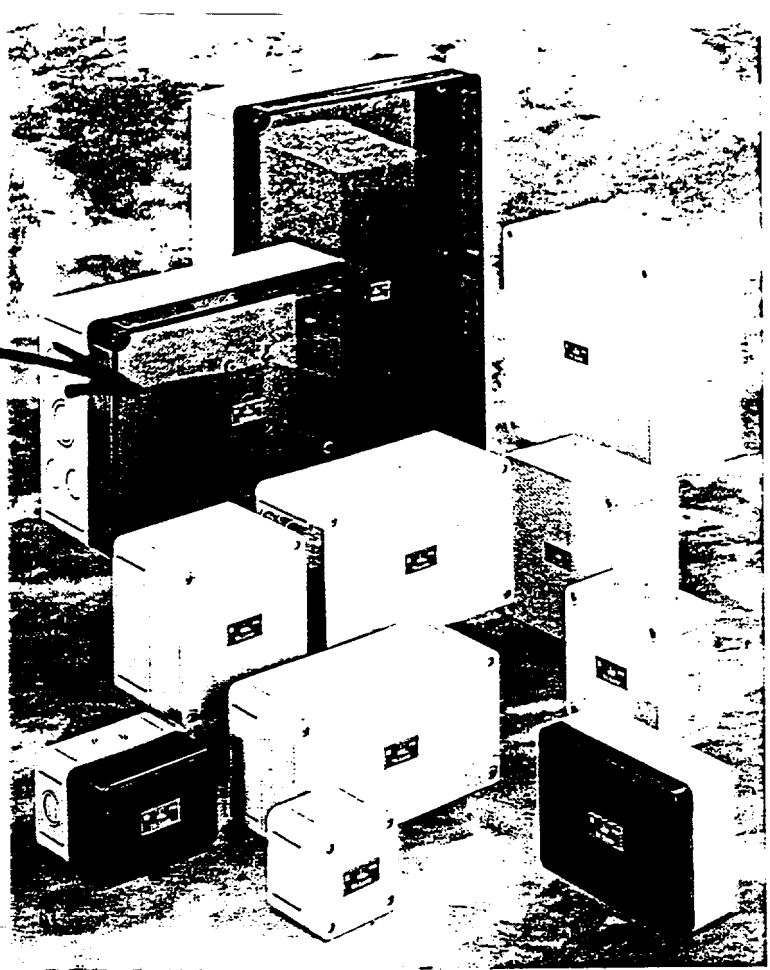

Important TK 2518 Accessories		
Description	Ref. No.	Page
Mounting plate	195-008	61
Standard rail NS 35/216	Z-652	61
Hinge kit	190-005	61
Wall plate kit	194-001	61
Padlock	190-100	62

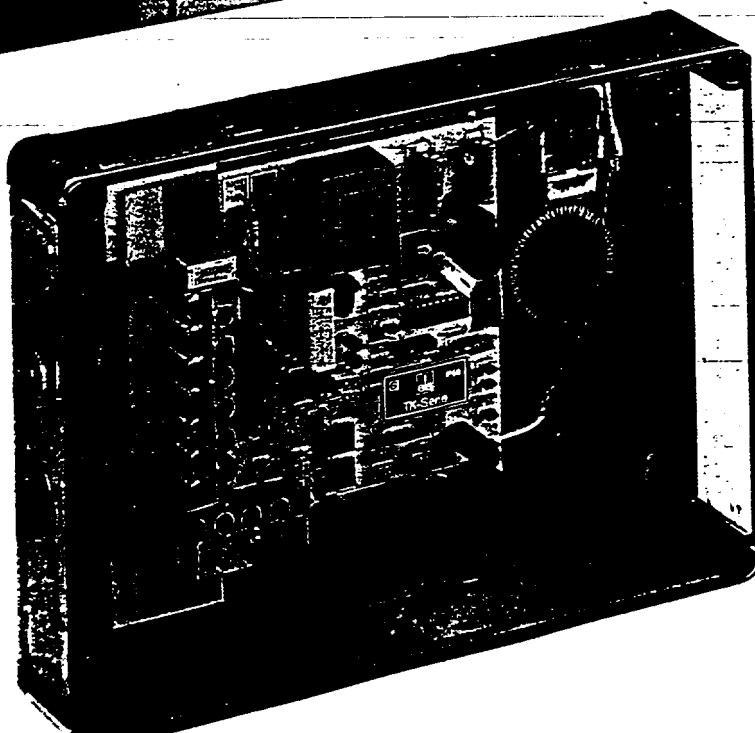

Transparent
covers are always
made of poly-
carbonate and
give the enclosures
an attractive
appearance.