

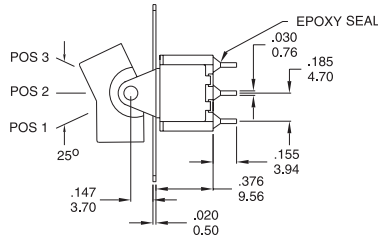


Rocker Switches

Miniature Rocker & Paddle Switches





RK13 Series

UL version available by request







RK1351A1NANT1AGEV

UL version available by request

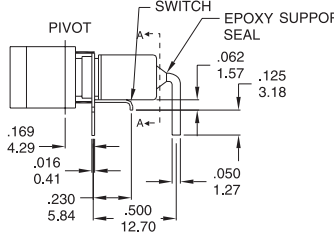



RK1351J1NANT6AGEV

UL version available by request

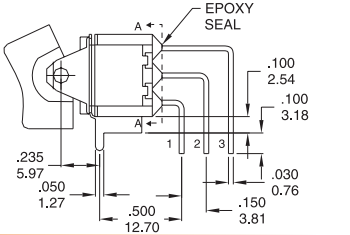


RK1351J1NANT7AGEV

UL version available by request

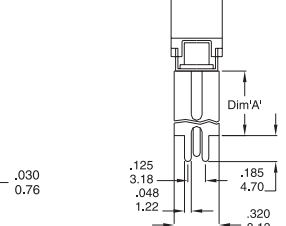



OPTION CODE	DIM. 'A'
VS2	.460 11.68
VS3	.630 16.00

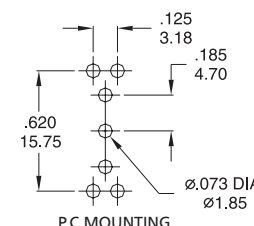


RK1351J1NANVS2AGEV

UL version available by request

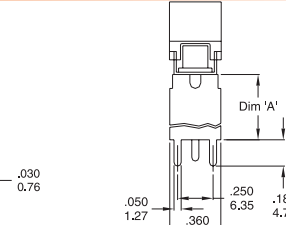

OPTION CODE	DIM. 'A'
VS4	.460 11.68
VS5	.630 16.00

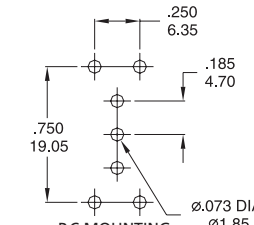

RK1351J1NANVS4AGEV

How to order:

RK13

- 1 POLES & SWITCH FUNCTION:**
 - S1 SP ON-NONE-ON
 - S2 SP ON-NONE-MOM
 - S3 SP ON-OFF-ON
 - S4 SP MOM-OFF-MOM
 - S5 SP ON-OFF-MOM
 - D1 DP ON-NONE-ON
 - D2 DP ON-NONE-MOM
 - D3 DP ON-OFF-ON
 - D4 DP MOM-OFF-MOM
 - D5 DP ON-OFF-MOM
 - D6 DP ON-ON-ON
 - D7 DP MOM-ON-MOM
 - D8 DP ON-ON-MOM
 - T1 3P ON-NONE-ON
 - T2 3P ON-NONE-MOM
 - T3 3P ON-OFF-ON
 - T4 3P MOM-OFF-MOM
 - T5 3P ON-OFF-MOM
 - F1 4P ON-NONE-ON
 - F2 4P ON-NONE-MOM
 - F3 4P ON-OFF-ON
 - F4 4P MOM-OFF-MOM
 - F5 4P ON-OFF-MOM
 - F6 4P ON-ON-ON
 - F7 4P MOM-ON-MOM
 - F8 4P ON-ON-MOM
- 2 ACTUATOR:**
 - A1 13.49 Long Rocker (Support)
 - A2 Lever (Support)
 - A3 23.01 Long Rocker (Support)
 - A4 Lever (Support)
- 3 ACTUATOR MARKING:**

A		D		G	
B		E		H	
C		F		N	
- 4 + 5 ACTUATOR & FRAME COLOR:**

A Black (Std.)	H Grey	B White	F Green
E Yellow	D Orange	C Red	K Brown
G Blue	N Without		
- 6 TERMINALS:**
 - T1 Solder Lug
 - T2 PC Thru-hole
 - T3 Quick Connect
 - T51 18.70 High, Wire Wrap
 - T52 24.20 High, Wire Wrap
 - T53 10.50 High, Wire Wrap
 - T54 26.97 High, Wire Wrap
 - T6 Right Angle, PC Thru-hole
 - T6N Right Angle, Snap-in PC Thru-hole
 - T7 Vertical Right Angle, PC Thru-hole
 - T7N Vertical Right Angle, Snap-in, PC Thru-hole
 - VS2 11.68 High, V-bracket
 - VS3 11.68 High, Snap-in, V-bracket
 - VS4 16.00 High, V-bracket
 - VS5 16.00 High, V-bracket
- 7 CONTACT MATERIAL:**
 - AG Silver
 - AU Gold
 - GT Gold, Tin-lead
 - UT Silver, Tin-lead
 - UG Gold over Silver
 - UGT Gold over Silver, Tin-lead
- 8 SEAL:**
 - E Epoxy (Standard)
 - N No Epoxy
- 9 ROHS & LEAD FREE:**
 - blank RoHS compliant
 - V RoHS & lead free

General Specifications:




- MATERIALS**
- » Movable Contact & Fixed Terminals: AG, GT, UG & UGT: Silver plated over copper alloy; AU & UT: Gold over nickel plated over copper alloy
 - » Actuator: Nylon
 - » Bushing: Brass, nickel plated
 - » Housing: Stainless Steel
 - » Switch Support: Brass, tin plated
- MECHANICAL**
- » Operating Temperature: -30°C to +85°C
 - » Mechanical Life: 40,000 cycles
- CONTACT RATING**
- » AG, GT, UG & UGT: 5A 120VAC/28VDC 2A 250VAC
 - » AU & UT: 0.4 VA max. 20V max. (AC/DC)
- ELECTRICAL**
- » Contact Resistance: 10m Ω max. initial @ 2-4VDC for both silver & gold plated contacts
 - » Insulation Resistance: 1,000M Ω min
 - » Dielectric Strength: 1,000V RMS@sea level

Rocker Switches

Miniature Rocker & Paddle Switches




RK13 Series

UL version available by request

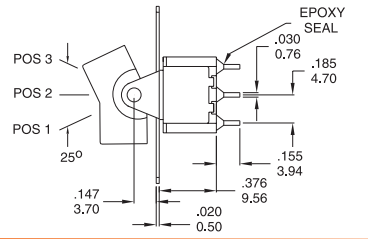




RK13D1A1NANT1AGEV

UL version available by request

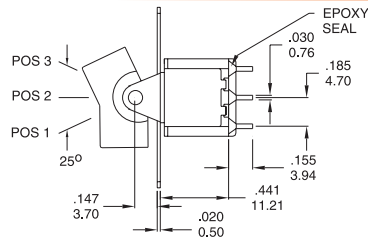





RK13T1A1NANT1AGEV

UL version available by request

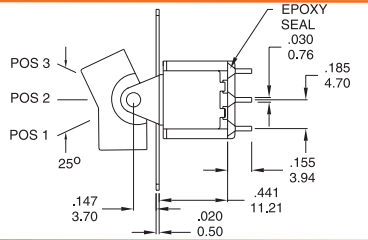





RK13F1A1NANT1AGEV

UL version available by request

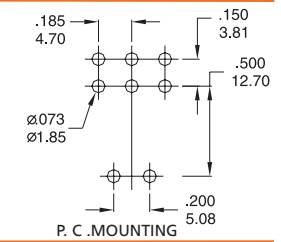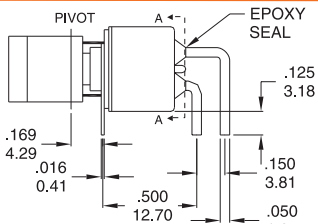





RK13D1J1NANT6AGEV

UL version available by request

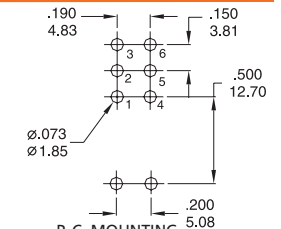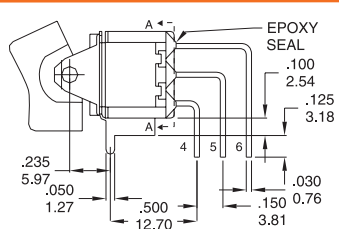





RK13D1J1NANT7AGEV

UL version available by request

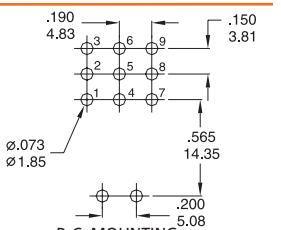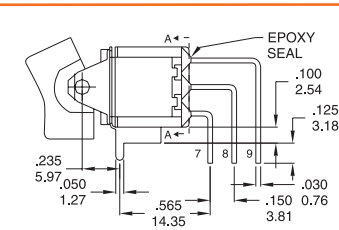



RK13T1J1NANT7AGEV

UL version available by request

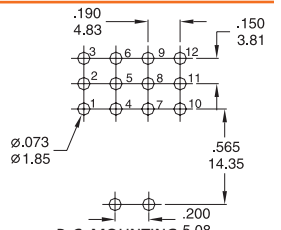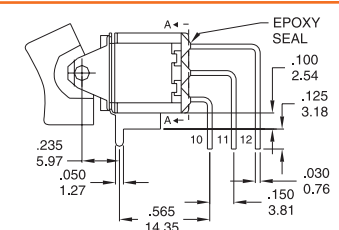


RK13F1J1NANT7AGEV

UL version available by request



OPTION CODE	DIM. 'A'
VS2	.460 11.68
VS3	.630 16.00

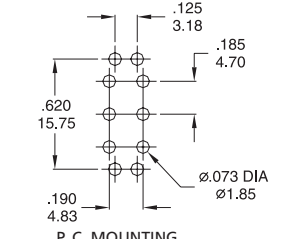

RK13D1J1NANVS2AGEV

Rocker Switches



Miniature Rocker & Paddle Switches

RK13 Series


UL version available by request



RK13D1J1NANV5SAGEV



OPTION CODE	DIM. 'A'
VS4	.460 11.68
VS5	.630 16.00



P. C. MOUNTING

SWITCH FUNCTION

NO. POLES	MODEL NO.	SWITCH FUNCTION			CONNECTED TERMINALS / SCHEMATIC			
		POS.1	POS.2	POS.3	POS.1	POS.2	POS.3	
SP	S1	ON	NONE	ON		N/A		
	S2	ON	NONE	MOM	2-3		2-1	
	S3	ON	OFF	ON		OPEN		
	S4	MOM	OFF	MOM				
	S5	ON	OFF	MOM				
DP	D1	ON	NONE	ON		N/A		
	D2	ON	NONE	MOM	2-3,5-6		2-1,5-4	
	D3	ON	OFF	ON		OPEN		
	D4	MOM	OFF	MOM				
	D5	ON	OFF	MOM				
	▲	D6	ON	ON	ON			
	▲	D7	MOM	ON	MOM	2-3,5-6	2-3,5-4	2-1,5-4
		D8	ON	ON	MOM			
3P	T1	ON	NONE	ON		N/A		
	T2	ON	NONE	MOM	2-3,5-6,8-9		2-1,5-4,8-7	
	T3	ON	OFF	ON		OPEN		
	T4	MOM	OFF	MOM				
	T5	ON	OFF	MOM				
4P	F1	ON	NONE	ON		N/A		
	F2	ON	NONE	MOM	2-3,5-6,8-9,11-12		2-1,5-4,8-7,11-10	
	F3	ON	OFF	ON		OPEN		
	F4	MOM	OFF	MOM				
	F5	ON	OFF	MOM				
	▲	F6	ON	ON	ON			
	▲	F7	MOM	ON	MOM	2-3,5-6,8-9,11-12	2-3,5-4,8-9,11-10	2-1,5-4,8-7,11-10
		F8	ON	ON	MOM			

MOM=MOMENTARY


▲ Please check the availability in advance before order

Rocker Switches


Miniature Rocker & Paddle Switches

RK13 Series

ACTUATOR OPTIONS FOR PANEL MOUNT ONLY

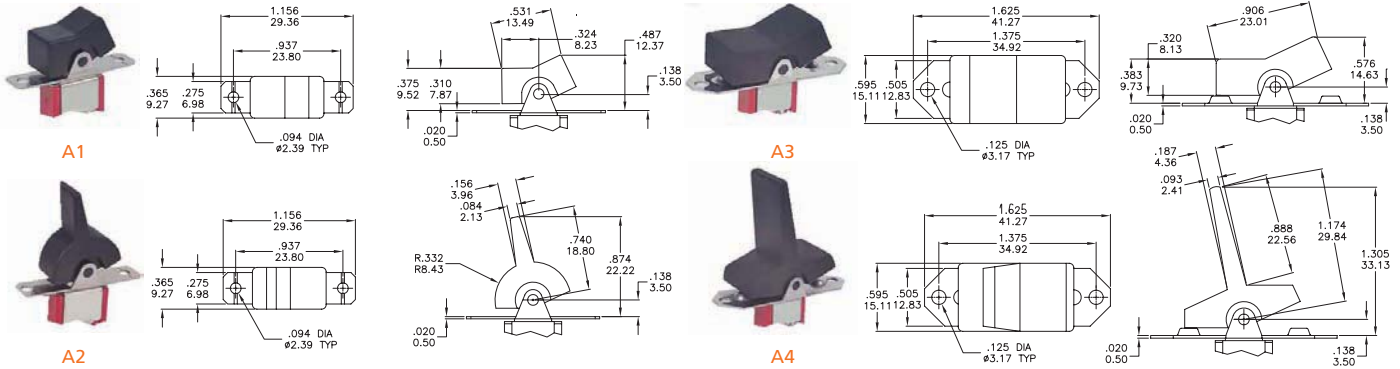

ACTUATOR OPTIONS SNAP-IN FRONT MOUNT

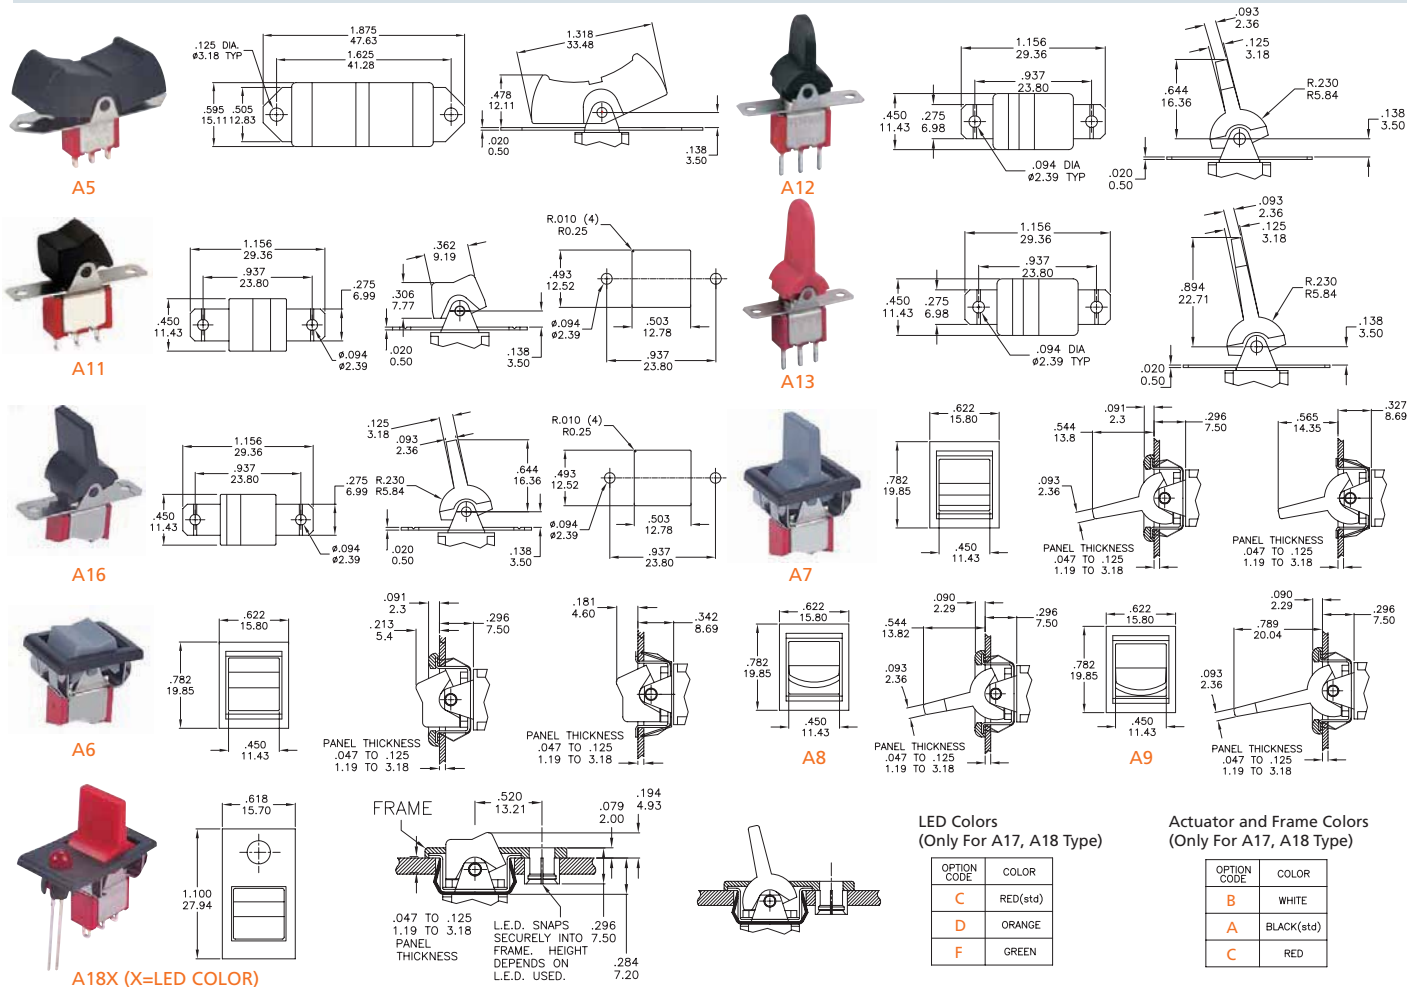


LED Colors (Only For A17, A18 Type)

OPTION CODE	COLOR
C	RED(std)
D	ORANGE
F	GREEN

Actuator and Frame Colors (Only For A17, A18 Type)

OPTION CODE	COLOR
B	WHITE
A	BLACK(std)
C	RED

RECOMMENDED MOUNTING

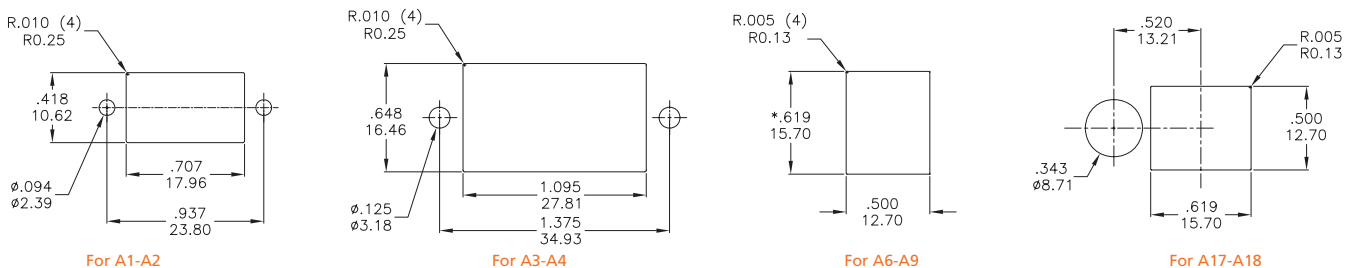

*For A8 and A9: Increase this dim. to .620/.625(15,75/15,88) for .091/.125 (2,31/3,18) thk. panels.



* For A6 and A7: Increase this dim. to .620/.625(15,75/15,88) for .060/.125 (1,52/3,18) thk. panels.

Rocker Switches

Miniature Rocker & Paddle Switches


RK13 Series

ACTUATOR OPTIONS FOR P. C. MOUNT ONLY

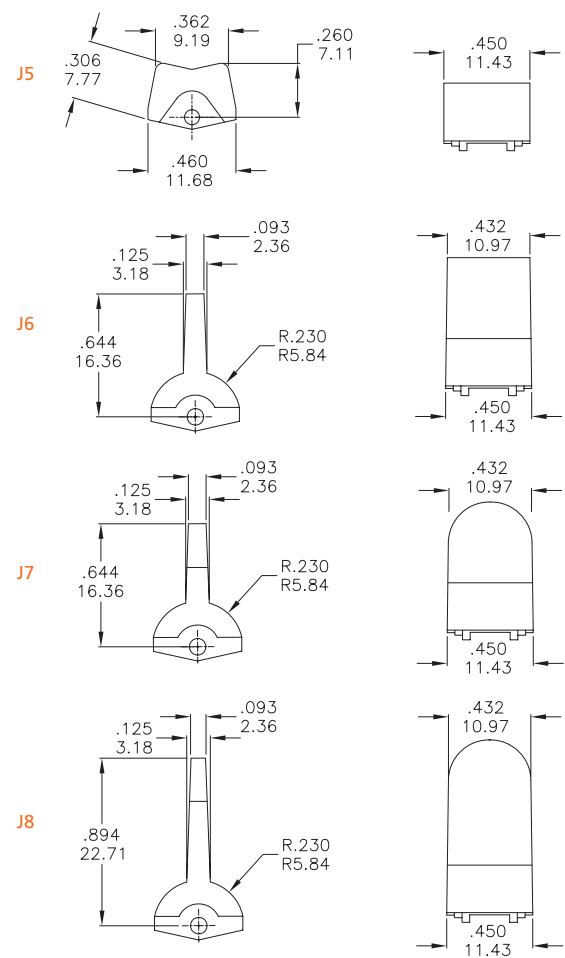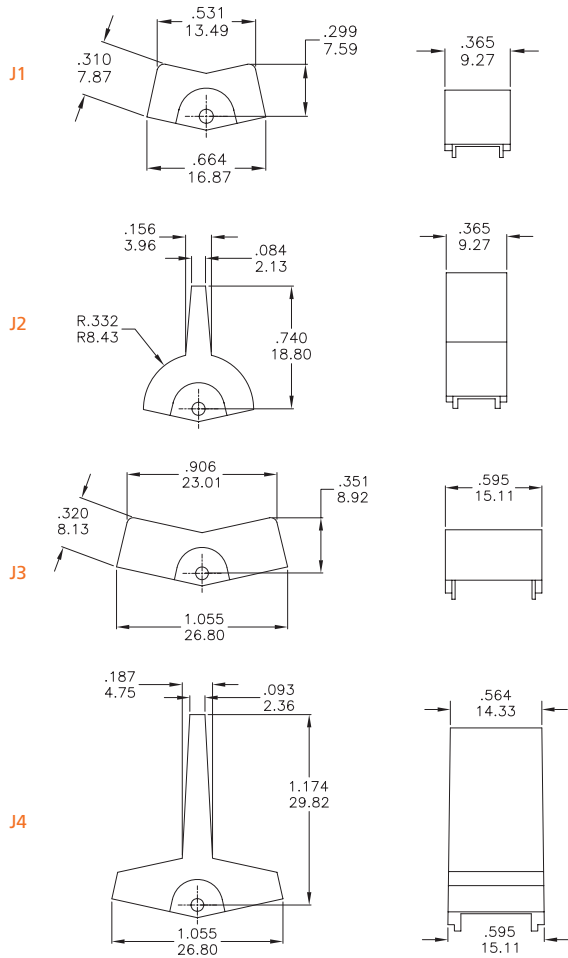


TERMINATION OPTIONS

T1 SOLDER LUG

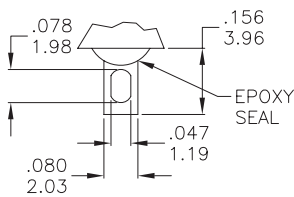


THK .030(0.76)

T2 PC THRU - HOLE

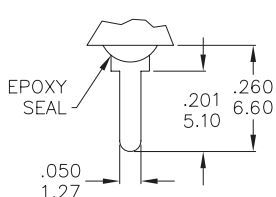


THK .030(0.76)

T3 QUICK CONNECT



THK .030(0.76)


T5 WIRE WRAP

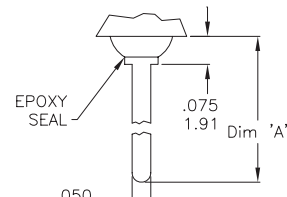


THK .030(0.76)

OPTION CODE	DIM. 'A'
T51	.737(18.70)
T52	.953(24.20)
T53	.415(10.55)
T54	1.062(26.97)

SNAP - IN TERMINATION OPTIONS



T6N



V2N

