


XBee® Multipoint RF Modules

Embedded RF Modules for OEMs

Providing critical end-point connectivity to Digi's Drop-in Networking product family, XBee multipoint RF modules are low-cost and easy to deploy.

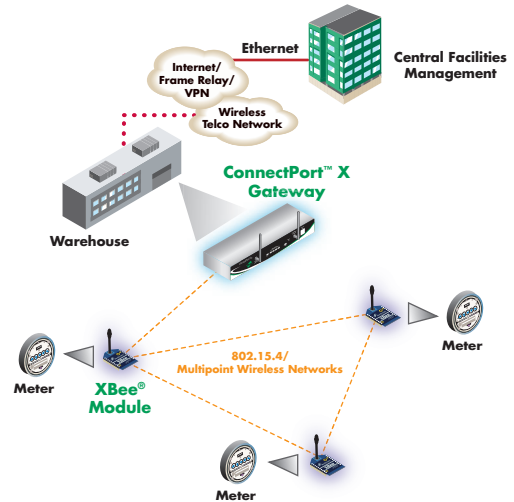

Features/Benefits

- 802.15.4/Multipoint network topologies
- 2.4 GHz for worldwide deployment
- 900 MHz for long-range deployment
- Fully interoperable with other Digi Drop-in Networking products, including gateways, device adapters and extenders
- Common XBee footprint for a variety of RF modules
- Low-power sleep modes
- Multiple antenna options
- Industrial temperature rating (-40° C to 85° C)
- Low power and long range variants available

Overview

XBee Product Family

The XBee family of embedded RF modules provides OEMs with a common footprint shared by multiple platforms, including multipoint and ZigBee/Mesh topologies, and both 2.4 GHz and 900 MHz solutions. OEMs deploying the XBee can substitute one XBee for another, depending upon dynamic application needs, with minimal development, reduced risk and shorter time-to-market.

Why XBee Multipoint RF Modules?




XBee multipoint RF modules are ideal for applications requiring low latency and predictable communication timing. Providing quick, robust communication in point-to-point, peer-to-peer, and multipoint/star configurations, XBee multipoint products enable robust end-point connectivity with ease. Whether deployed as a pure cable replacement for simple serial communication, or as part of a more complex hub-and-spoke network of sensors, XBee multipoint RF modules maximize wireless performance and ease of development.

Drop-in Networking End-Point Connectivity

XBee OEM RF modules are part of Digi's Drop-in Networking family of end-to-end connectivity solutions. By seamlessly interfacing with compatible gateways, device adapters and extenders, XBee embedded RF modules provide developers with true beyond-the-horizon connectivity.

Platform	XBee® 802.15.4 (Series 1)	XBee-PRO® 802.15.4 (Series 1)	XBee-PRO® XSC
Performance			
RF Data Rate	250 kbps	250 kbps	10 kbps / 9.6 kbps
Indor/Urban Range	100 ft (30 m)	300 ft (100 m)	Up to 1200 ft (370 m)
Outdoor/RF Line-of-Sight Range	300 ft (100 m)	1 mi (1.6 km)	Up to 6 mi (9.6 km)
Transmit Power	1 mW (+0 dBm)	60 mW (+18 dBm)*	100 mW (+20 dBm)
Receiver Sensitivity (1% PER)	-92 dBm	-100 dBm	-106 dBm
Features			
Serial Data Interface	3.3V CMOS UART	3.3V CMOS UART	3.3V CMOS UART (5V Tolerant)
Configuration Method	API or AT Commands, local or over-the-air	API or AT Commands, local or over-the-air	AT Commands
Frequency Band	2.4 GHz	2.4 GHz	902 MHz to 928 MHz
Interference Immunity	DSSS (Direct Sequence Spread Spectrum)	DSSS (Direct Sequence Spread Spectrum)	FHSS (Frequency Hopping Spread Spectrum)
Serial Data Rate	1200 bps - 250 kbps	1200 bps - 250 kbps	1200 bps - 57.6 kbps
ADC Inputs	(6) 10-bit ADC inputs	(6) 10-bit ADC inputs	None
Digital I/O	8	8	None
Antenna Options	Chip, Wire Whip, U.FL, & RPSMA	Chip, Wire Whip, U.FL, & RPSMA	Wire Whip, U.FL, RPSMA
Networking & Security			
Encryption	128-bit AES	128-bit AES	No
Reliable Packet Delivery	Retries/Acknowledgments	Retries/Acknowledgments	Retries/Acknowledgements
IDs and Channels	PAN ID, 64-bit IEEE MAC, 16 Channels	PAN ID, 64-bit IEEE MAC, 12 Channels	PAN ID, 32-bit Address, 7 Channels
Power Requirements			
Supply Voltage	2.8 - 3.4VDC	2.8 - 3.4VDC	3.0 - 3.6VDC
Transmit Current	45 mA @ 3.3VDC	215 mA @ 3.3VDC	265 mA typical
Receive Current	50 mA @ 3.3VDC	55 mA @ 3.3VDC	65 mA typical
Power-Down Current	<10 uA @ 25° C	<10 uA @ 25° C	45 uA pin Sleep
Regulatory Approvals			
FCC (USA)	OUR-XBEE	OUR-XBEEPRO	MCQ-XBEEEXSC
IC (Canada)	4214A-XBEE	4214A-XBEEPRO	1846A-XBEEEXSC
ETSI (Europe)	Yes	Yes* Max TX 10 mW	No
C-TICK Australia	Yes	Yes	No
Telec (Japan)	Yes	Yes*	No

* XBee-PRO 802.15.4 TX Power restricted to 10 mW in Europe and Japan.

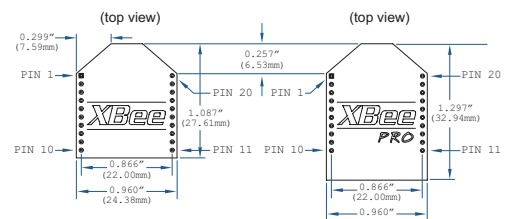

Please visit www.digi.com for part numbers.

DIGI SERVICE AND SUPPORT - You can purchase with confidence knowing that Digi is here to support you with expert technical support and a one-year warranty. www.digi.com/support

WHEN
RELIABILITY
MATTERS™

Digi International

11001 Bren Road E.
Minnetonka, MN 55343
U.S.A.
PH: 877-912-3444
952-912-3444
FX: 952-912-4952
email: info@digi.com

Digi International France

31 rue des Poissonniers
92200 Neuilly sur Seine
PH: +33-1-55-61-98-98
FX: +33-1-55-61-98-99
www.digi.fr

Digi International KK

NES Building South 8F
22-14 Sakuragaoka-cho,
Shibuya-ku
Tokyo 150-0031, Japan
PH: +81-3-5428-0261
FX: +81-3-5428-0262
www.digi-intl.co.jp

Digi International (HK) Limited

Suite 1703-05, 17/F,
K Wah Centre
191 Java Road
North Point, Hong Kong
PH: +852-2833-1008
FX: +852-2572-9989
www.digi.cn

Digi International, the leader in device networking for business, develops reliable products and technologies to connect and securely manage local or remote electronic devices over the network or via the web. With over 20 million ports shipped worldwide since 1985, Digi offers the highest levels of performance, flexibility and quality.

www.digi.com

© 2006-2008 Digi International Inc.

All rights reserved. Digi, Digi International, the Digi logo, the When Reliability Matters logo, XBee and XBee-PRO are trademarks or registered trademarks of Digi International Inc. in the United States and other countries worldwide. All other trademarks are the property of their respective owners.

91001412
B1/308

