CMMR1S-02

SURFACE MOUNT SUPER FAST RECOVERY SILICON RECTIFIER 1.0 AMP, 200 VOLTS



MARKING CODE: CSF02F



DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMMR1S-02 is a 1.0 Amp Silicon Super Fast Recovery Rectifier in the SOD-123F surface mount package. This high quality, well constructed, highly reliable device is designed for use in all types of commercial, industrial, entertainment, computer and automotive applications.

FEATURES:

- Small size (58% smaller than the SMA package)
- 67% lower profile than SMA
- Greatly improved power dissipation per board area compared to the SMA
- Low Forward Voltage
- High Current
- Thermally efficient Flat Lead package design

MAXIMUM RATINGS: (T_A=25°C unless otherwise noted)

SYMBOL		UNITS
V_{RRM}	200	V
V_{R}	200	V
V _{R(RMS)}	140	V
I _O	1.0	Α
I _{FSM}	30	Α
T _J ,T _{stg}	-65 to +150	°C
$^{ heta}$ JA	180	°C/W
	VR VR(RMS) IO ^I FSM T _J ,T _{Stg}	VRRM 200 VR 200 VR(RMS) 140 IO 1.0 IFSM 30 TJ,Tstg -65 to +150

ELECTRICAL CHARACTERISTICS: (T_A=25°C unless otherwise noted)


SYMBOL	TEST CONDITIONS	TYP	MAX	UNITS
I_{R}	V _R =200V		10	μΑ
I_{R}	V _R =200V, T _A =100°C		50	μΑ
V_{F}	I _F =1.0A		0.95	V
t _{rr}	I _F =0.5A, I _R =1.0A, Recover to 0.25A		35	ns
CJ	V _R =4.0V, f=1.0MHz	4.0		pF



CMMR1S-02

SURFACE MOUNT SUPER FAST RECOVERY SILICON RECTIFIER 1.0 AMP, 200 VOLTS

SOD-123F CASE - MECHANICAL OUTLINE

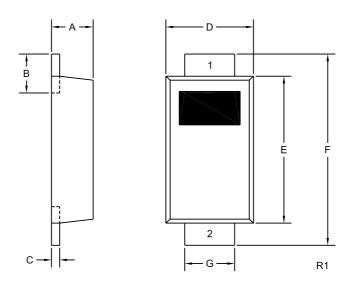

DIMENSIONS							
	INCHES		INCHES MILLIM		ETERS		
SYMBOL	MIN	MAX	MIN	MAX			
Α	0.035	0.043	0.88	1.08			
В	0.020	0.031	0.50	0.80			
С	0.004	0.008	0.10	0.20			
D	0.065	0.077	1.65	1.95			
Е	0.104	0.116	2.65	2.95			
F	0.140	0.156	3.55	3.95			
G	0.030	0.041	0.75	1.05			

SOD-123F (REV:R1)

LEAD CODE:

1) CATHODE

2) ANODE

MARKING CODE: CSF02F