



VRLA Rechargeable Battery

BP12-6 (BP12-6FR)



FEATURES

- Maintenance free(no water topping-up required).
- No free acid(Non-spillable battery).
- Low self-discharge rate, lower than 3% capacity loss per month.
- Can be used in any orientation(excluding used inverted).

APPLICATION

- UPS
- Electronic Toy-Cars
- Emergency Lights
- Rechargeable Flashlights
- Fans



SPECIFICATIONS

Nominal Voltage	6 V
Nominal Capacity	12.0Ah @ 20 hour rate F.V.(1.75V/cell)
Approx. Weight	1980g(4.37lbs.)
Terminals	T1 (Faston Tab 187) T2 is optional
Internal Resistance	$\leq 9m\Omega$ (Fully Charged)
Max. Discharge Current	180 A (5 sec.)
Max. Charge Current	3.6 A
Operating Temperature Range	Charge : 0°C~40°C(32°F~104°F) Discharge : -20°C~50°C(-4°F~122°F) Storage. : -20°C~40°C(-4°F~104°F)
Container Material	ABS(UL94-HB, UL94-V0 is optional)

ISO 9001



ISO14001



UL



CE



- IEC61056
- JIS C 8702
- GB/T 19639
- VdS G103023

DIMENSION(mm/inch)

OUTER DIMENSIONS

TERMINAL TYPE

Length

151±1.5 (5.94±0.06)

Width



50±1.5 (1.97±0.06)

Container Height


94±1.5 (3.70±0.06)

Total Height


100±2.0 (3.94±0.08)

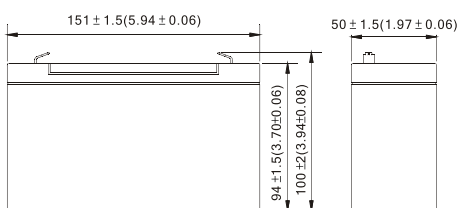

Terminal T1



Terminal T2



Constant power discharge characteristics at 25 °C/77 °F

Unit: W

Discharge Time F.V. (V/cell)	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	216.9	159.7	128.0	76.1	43.7	17.5	12.06	6.74	3.55
1.75V	251.1	173.0	133.9	79.0	45.0	17.8	12.24	6.84	3.60
1.70V	266.8	179.2	138.0	80.8	45.8	18.0	12.31	6.87	3.62
1.65V	278.8	183.5	141.2	82.0	46.3	18.1	12.35	6.89	3.63
1.60V	288.0	187.2	144.0	82.8	46.8	18.2	12.39	6.89	3.63

Constant current discharge characteristics at 25 °C/77 °F

Unit: A

Discharge Time F.V. (V/cell)	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	39.1	28.1	22.3	12.9	7.34	2.91	2.010	1.123	0.591
1.75V	46.1	30.5	23.3	13.4	7.56	2.97	2.040	1.140	0.600
1.70V	48.9	31.6	24.0	13.7	7.70	3.00	2.051	1.146	0.603
1.65V	51.1	32.3	24.6	13.9	7.79	3.02	2.058	1.149	0.605
1.60V	52.8	33.0	25.0	14.0	7.87	3.04	2.064	1.149	0.605

All data shall be changed without prior notice, BB reserves the right to explain and update the information contained hereinto.