


Lower Voltage Ceramic Disc Capacitors 1 kV_{DC} to 3 kV_{DC} Low Dissipation Factor

Fig. 1

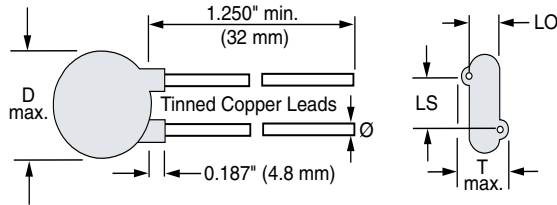

LEAD OFFSET 'LO' (NOMINAL)	
1 kV _{DC}	0.045" (1.2 mm)
2 kV _{DC}	0.075" (1.4 mm)
3 kV _{DC}	0.095" (1.8 mm)

INSULATION RESISTANCE

min. 50 000 MΩ

TOLERANCE ON CAPACITANCE

± 5 %, ± 10 %

DISSIPATION FACTOR

0.1 % max. at 1 kHz; 1 V

CATEGORY TEMPERATURE RANGE

- 55 °C to + 125 °C

CLIMATIC CATEGORY ACC. TO EN60068-1

55/125/21

OPERATING TEMPERATURE RANGE

- 55 °C to + 105 °C

FEATURES

- Low losses
- High stability
- Low DF minimizes self heating at HF
- Ideal for high switching to 100 kHz
- Radial leads
- Compliant to RoHS directive 2002/95/EC



RoHS
COMPLIANT

APPLICATIONS

- SMPS
- HF ballast
- Snubber and HV circuits

DESIGN

The capacitors consist of a ceramic disc of which both sides are silver-plated. Connection leads are made of tinned copper having diameters of 0.022" (0.51 mm) or 0.025" (0.64 mm).

The capacitors may be supplied with radial kinked or straight leads having lead spacing of 0.250" (6.35 mm) or 0.375" (9.5 mm).

The standard tolerances are ± 5 %, ± 10 %.

Coating is made of or flammable retardant epoxy resin in accordance with "UL 94 V-0".

CAPACITANCE RANGE

10 pF to 6800 pF

RATED VOLTAGE

1000 V_{DC} (500 V_{RMS})
2000 V_{DC} (1000 V_{RMS})
3000 V_{DC} (1500 V_{RMS})

DIELECTRIC STRENGTH BETWEEN LEADS

Component test:

1000 V_{DC} 2500 V_{DC}, 2 s
2000 V_{DC} 4000 V_{DC}, 2 s
3000 V_{DC} 6000 V_{DC}, 2 s

CERAMIC DIELECTRIC

C0G, N1500, N2000, N2200, N2500, N2800 (Class 1)

561R and 564R Series



Vishay Cera-Mite

Lower Voltage Ceramic Disc Capacitors
1 kV_{DC} to 3 kV_{DC} Low Dissipation Factor

ORDERING INFORMATION, CERAMIC 1 kV _{DC} LOW DISSIPATION FACTOR								
C (pF)	TOL. (%)	D DIAMETER INCH (mm)	T THICKNESS INCH (mm)	LS LEAD SPACE inch (mm)	WIRE SIZE		FIG	ORDERING CODE
					AWG	INCH (mm)		
COG (NP0)								
10	± 5 %	0.250 (6.4)	0.156 (4.0)	0.250 (6.4)	22	0.025 (0.64)	1	561R1DF0Q10
12								561R1DF0Q12
N1500								
15	± 5 %	0.250 (6.4)	0.156 (4.0)	0.250 (6.4)	22	0.025 (0.64)	1	561R1DF0Q15
18								561R1DF0Q18
22								561R1DF0Q22
47								561R1DF0Q47
56								561R1DF0Q56
68								561R1DF0Q68
82								561R1DF0Q82
N2200								
27	± 10 %	0.250 (6.4)	0.156 (4.0)	0.250 (6.4)	22	0.025 (0.64)	1	561R1DF0Q27
33								561R1DF0Q33
39								561R1DF0Q39
N2000								
100	± 10 %	0.250 (6.4)	0.156 (4.0)	0.250 (6.4)	22	0.025 (0.64)	1	561R1DF0T10
120								561R1DF0T12
150								561R1DF0T15
180								561R1DF0T18
N2500								
220	± 10 %	0.250 (6.4)	0.156 (4.0)	0.250 (6.4)	22	0.025 (0.64)	1	561R1DF0T22
270								561R1DF0T27
N2800								
330	± 10 %	0.250 (6.4)	0.156 (4.0)	0.250 (6.4)	22	0.025 (0.64)	1	561R1DF0T33
390								561R1DF0T39
470								561R1DF0T47
560		0.290 (7.4)	0.156 (4.0)	0.250 (6.4)				561R1DF0T56
680								561R1DF0T68
820								561R1DF0T82
1000								561R1DF0D10
1200		0.370 (9.4)	0.156 (4.0)	0.250 (6.4)				561R1DF0D12
1500								561R1DF0D15
1800								561R1DF0D18
2200		0.440 (11.2)	0.156 (4.0)	0.250 (6.4)				561R1DF0D22
2300								561R1DF0D23
2400								561R1DF0D24
2500								561R1DF0D25
2700								561R1DF0D27
3300								561R1DF0D33
3900								561R1DF0D39
4700		0.460 (11.7)	0.156 (4.0)	0.250 (6.4)				561R1DF0D47
6800								561R1DF0D68
2700	0.490 (12.4)	0.156 (4.0)	0.250 (6.4)	561R1DF0D27				
3300				561R1DF0D33				
3900	0.530 (13.5)	0.156 (4.0)	0.250 (6.4)	561R1DF0D39				
4700				561R1DF0D47				
6800	0.560 (14.2)	0.156 (4.0)	0.375 (9.5)	561R1DF0D68				
6800				561R1DF0D68				
4700	0.630 (16.0)	0.156 (4.0)	0.375 (9.5)	561R1DF0D47				
6800				561R1DF0D68				
6800	0.760 (19.3)	0.156 (4.0)	0.375 (9.5)	561R1DF0D68				
6800				561R1DF0D68				

Note

- Alternate Lead Spacings of 5 mm, 7.5 mm or 10 mm are available on request

TAPE AND REEL OPTIONS

- To specify tape and reel, add two letter suffix to the ordering code (for details of the packaging code see general section of the catalog)



561R and 564R Series

Lower Voltage Ceramic Disc Capacitors
1 kV_{DC} to 3 kV_{DC} Low Dissipation Factor

Vishay Cera-Mite

ORDERING INFORMATION, CERAMIC 2 kV _{DC} LOW DF								
C (pF)	TOL. (%)	D DIAMETER INCH (mm)	T THICKNESS INCH (mm)	LS LEAD SPACE INCH (mm)	WIRE SIZE		FIG.	ORDERING CODE
					AWG	INCH (mm)		
C0G (NP0)								
10	± 5 %	0.290 (7.4)	0.160 (4.1)	0.250 (6.4)	20	0.032 (0.81)	1	564R2DF0Q10
N1500								
12	± 5 %	0.290 (7.4)	0.170 (4.3)	0.250 (6.4)	20	0.032 (0.81)	1	564R2DF0Q12
27		0.290 (7.4)	0.220 (5.6)	0.250 (6.4)				564R2DF0Q27
33		0.290 (7.4)	0.195 (5.0)	0.250 (6.4)				564R2DF0Q33
39		0.290 (7.4)	0.180 (4.6)	0.250 (6.4)				564R2DF0Q39
47		0.290 (7.4)	0.170 (4.3)	0.250 (6.4)				564R2DF0Q47
N2200								
15	± 5 %	0.290 (7.4)	0.185 (4.7)	0.250 (6.4)	20	0.032 (0.81)	1	564R2DF0Q15
18		0.290 (7.4)	0.170 (4.3)	0.250 (6.4)				564R2DF0Q18
22		0.290 (7.4)	0.170 (4.3)	0.250 (6.4)				564R2DF0Q22
N2000								
56	± 5 %	0.290 (7.4)	0.210 (5.3)	0.250 (6.4)	20	0.032 (0.81)	1	564R2DF0Q56
68		0.290 (7.4)	0.190 (4.8)	0.250 (6.4)				564R2DF0Q68
82		0.290 (7.4)	0.175 (4.5)	0.250 (6.4)				564R2DF0Q82
100		0.290 (7.4)	0.170 (4.3)	0.250 (6.4)				564R2DF0T10
N2500								
120	± 10 %	0.290 (7.4)	0.185 (4.7)	0.250 (6.4)	20	0.032 (0.81)	1	564R2DF0T12
150		0.290 (7.4)	0.170 (4.3)	0.250 (6.4)				564R2DF0T15
180		0.290 (7.4)	0.185 (4.7)	0.250 (6.4)				564R2DF0T18
270		0.330 (8.4)	0.170 (4.3)	0.250 (6.4)				564R2DF0T27
470		0.400 (10.2)	0.170 (4.3)	0.250 (6.4)				564R2DF0T47
N2800								
220	± 10 %	0.290 (7.4)	0.170 (4.3)	0.250 (6.4)	20	0.032 (0.81)	1	564R2DF0T22
330		0.330 (8.4)	0.185 (4.7)	0.250 (6.4)				564R2DF0T33
390		0.330 (8.4)	0.175 (4.5)	0.250 (6.4)				564R2DF0T39
560		0.400 (10.2)	0.185 (4.7)	0.250 (6.4)				564R2DF0T56
680		0.400 (10.2)	0.170 (4.3)	0.250 (6.4)				564R2DF0T68
820		0.430 (10.9)	0.175 (4.5)	0.250 (6.4)				564R2DF0T82
1000		0.460 (11.7)	0.170 (4.3)	0.250 (6.4)				564R2DF0D10
1200		0.490 (12.5)	0.170 (4.3)	0.250 (6.4)				564R2DF0D12
1500		0.530 (13.5)	0.170 (4.3)	0.250 (6.4)				564R2DF0D15
1800		0.560 (14.2)	0.170 (4.3)	0.375 (9.5)				564R2DF0D18
2200		0.680 (17.3)	0.180 (4.6)	0.375 (9.5)				564R2DF0D22
2300		0.680 (17.3)	0.175 (4.5)	0.375 (9.5)				564R2DF0D23
2400		0.680 (17.3)	0.175 (4.5)	0.375 (9.5)				564R2DF0D24
2500		0.680 (17.3)	0.170 (4.3)	0.375 (9.5)				564R2DF0D25
2700		0.680 (17.3)	0.170 (4.3)	0.375 (9.5)				564R2DF0D27
3300		0.720 (18.3)	0.170 (4.3)	0.375 (9.5)				564R2DF0D33
3900		0.790 (20.1)	0.170 (4.3)	0.375 (9.5)				564R2DF0D39
4700		0.900 (22.9)	0.180 (4.6)	0.375 (9.5)				564R2DF0D47
5600		0.900 (22.9)	0.170 (4.3)	0.375 (9.5)				564R2DF0D56
6800		0.950 (24.1)	0.170 (4.3)	0.375 (9.5)				564R2DF0D68

Note

- Alternate Lead Spacings of 5 mm, 7.5 mm or 10 mm are available on request

TAPE AND REEL OPTIONS

- To specify tape and reel, add two letter suffix to the ordering code (for details of the packaging code see general section of the catalog)

561R and 564R Series



Vishay Cera-Mite

Lower Voltage Ceramic Disc Capacitors
1 kV_{DC} to 3 kV_{DC} Low Dissipation Factor

ORDERING INFORMATION, CERAMIC 3 kV _{DC} LOW DF								
C (pF)	TOL. (%)	D DIAMETER INCH (mm)	T THICKNESS INCH (mm)	LS LEAD SPACE INCH (mm)	WIRE SIZE		FIG.	ORDERING CODE
					AWG	INCH (mm)		
N1500								
10	± 5 %	0.290 (7.4)	0.185 (4.7)	0.250 (6.4)	20	0.032 (0.81)	1	564R3DF0Q10
27		0.290 (7.4)	0.220 (5.6)	0.250 (6.4)				564R3DF0Q27
33		0.290 (7.4)	0.195 (5.0)	0.250 (6.4)				564R3DF0Q33
39		0.290 (7.4)	0.190 (4.8)	0.250 (6.4)				564R3DF0Q39
47		0.330 (8.4)	0.225 (5.7)	0.250 (6.4)				564R3DF0Q47
N2200								
12	± 5 %	0.290 (7.4)	0.210 (5.3)	0.250 (6.4)	20	0.032 (0.81)	1	564R3DF0Q12
15		0.290 (7.4)	0.185 (4.7)	0.250 (6.4)				564R3DF0Q15
18		0.290 (7.4)	0.185 (4.7)	0.250 (6.4)				564R3DF0Q18
22		0.330 (8.4)	0.210 (5.3)	0.250 (6.4)				564R3DF0Q22
N2000								
56	± 5 %	0.290 (7.4)	0.210 (5.3)	0.250 (6.4)	20	0.032 (0.81)	1	564R3DF0Q56
68		0.290 (7.4)	0.190 (4.8)	0.250 (6.4)				564R3DF0Q68
82		0.290 (7.4)	0.185 (4.7)	0.250 (6.4)				564R3DF0Q82
N2500								
100	± 10 %	0.290 (7.4)	0.205 (5.2)	0.250 (6.4)	20	0.032 (0.81)	1	564R3DF0T10
120		0.290 (7.4)	0.190 (4.8)	0.250 (6.4)				564R3DF0T12
220		0.330 (8.4)	0.190 (4.8)	0.250 (6.4)				564R3DF0T22
N2800								
150	± 10 %	0.290 (7.4)	0.200 (5.1)	0.250 (6.4)	20	0.032 (0.81)	1	564R3DF0T15
180		0.290 (7.4)	0.190 (4.8)	0.250 (6.4)				564R3DF0T18
270		0.330 (8.4)	0.205 (5.2)	0.250 (6.4)				564R3DF0T27
330		0.330 (8.4)	0.190 (4.8)	0.250 (6.4)				564R3DF0T33
390		0.400 (10.2)	0.215 (5.5)	0.250 (6.4)				564R3DF0T39
470		0.400 (10.2)	0.195 (5.0)	0.250 (6.4)				564R3DF0T47
560		0.430 (10.9)	0.200 (5.1)	0.250 (6.4)				564R3DF0T56
680		0.460 (11.7)	0.195 (5.0)	0.250 (6.4)				564R3DF0T68
820		0.490 (12.5)	0.195 (5.0)	0.250 (6.4)				564R3DF0T82
1000		0.530 (13.5)	0.190 (4.8)	0.250 (6.4)				564R3DF0D10
1200		0.560 (14.2)	0.190 (4.8)	0.375 (9.5)				564R3DF0D12
1500		0.620 (15.8)	0.190 (4.8)	0.375 (9.5)				564R3DF0D15
1800		0.680 (17.3)	0.190 (4.8)	0.375 (9.5)				564R3DF0D18
2200		0.720 (18.3)	0.190 (4.8)	0.375 (9.5)				564R3DF0D22
2300		0.720 (18.3)	0.190 (4.8)	0.375 (9.5)				564R3DF0D23
2400		0.790 (20.1)	0.195 (5.0)	0.375 (9.5)				564R3DF0D24
2500		0.790 (20.1)	0.195 (5.0)	0.375 (9.5)				564R3DF0D25
2700		0.790 (20.1)	0.190 (4.8)	0.375 (9.5)				564R3DF0D27
3300		0.900 (22.9)	0.200 (5.1)	0.375 (9.5)				564R3DF0D33
3900		0.900 (22.9)	0.190 (4.8)	0.375 (9.5)				564R3DF0D39
4700	0.950 (24.1)	0.185 (4.7)	0.375 (9.5)	564R3DF0D47				

Note

- Alternate Lead Spacings of 5 mm, 7.5 mm or 10 mm are available on request

TAPE AND REEL OPTIONS

- To specify tape and reel, add two letter suffix to the ordering code (for details of the packaging code see general section of the catalog)




561R and 564R Series

Lower Voltage Ceramic Disc Capacitors
1 kV_{DC} to 3 kV_{DC} Low Dissipation Factor


Vishay Cera-Mite

Power Rating - 1DFO Series 500 V_{RMS} Low DF - Note 1

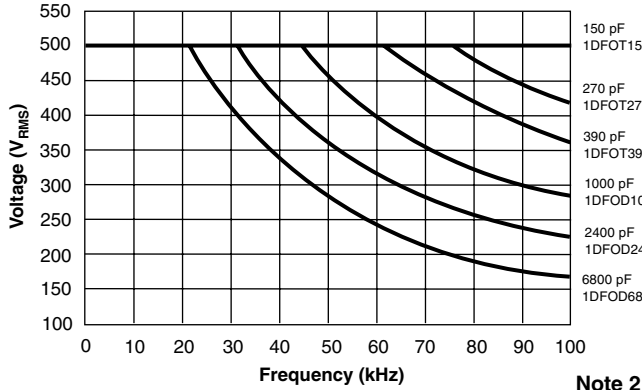


Note 2

Power Rating - 2DFO Series 1000 V_{RMS} Low DF - Note 1

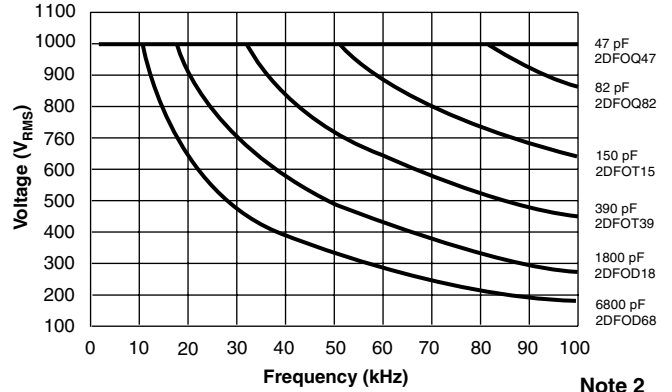

Note 2

Power Rating - 3DFO Series 1500 V_{RMS} Low DF - Note 1

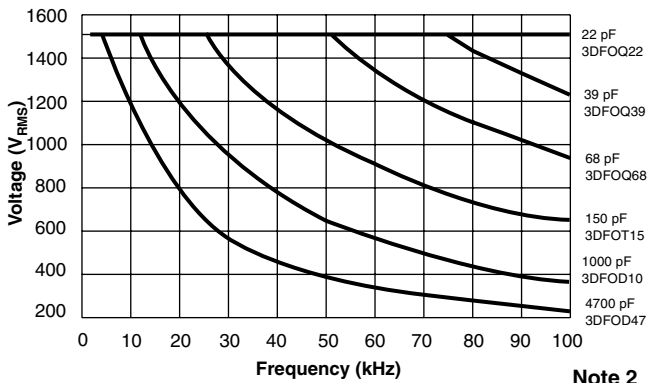

Note 2


Note 1

Power ratings are based on still air 60 °C ambient with additional 30 °C rise due to self heating. Thermal effects such as forced air cooling, component encapsulation or other heat-sinking techniques will alter ratings. Actual circuit for application recommended.

Note 2

For convenience, power rating charts are shown to 100 kHz. Higher frequency operation is permissible with appropriate derating. Consult us for application suggestions.

Temperature Characteristics for 1DFO, 2DFO & 3DFO Series

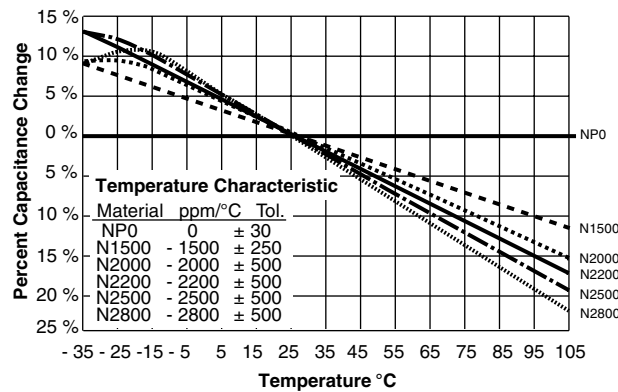



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.