

Memory Module Specification

KVR266X72RC25L/2G

2GB 256 x 72-Bit DDR266 Registered CL2.5 ECC 184-Pin DIMM Module

DESCRIPTION:

This document describes ValueRAM's 256M x 72-bit (2GB) DDR266 CL2.5 SDRAM (Synchronous DRAM) Registered ECC memory module. The components on this module include eighteen stacked 256M x 4-bit (thirty-six 128M x 4-Bit) DDR266 SDRAM and three 16-bit drivers in TSSOP packages. This 184-pin DIMM uses gold contact fingers and requires +2.5V. The electrical and mechanical specifications are as follows:

FEATURES:

☑ Clock Cycle Time (tCK) 7.5ns (min.) / 12ns (max.)

✓ Row Cycle Time (tRC)✓ Refresh Row Cycle Time (tRFC)65ns (min.)75ns (min.)

Row Active Time (tRAS) 45ns (min.) / 120,000ns (max.)

✓ Single Power Supply of
✓ Power (IDD0)
+2.5V (+/- .25V)
12.550 W operating

☑ UL Rating 94 V - 0

Note: The module defined in this data sheet is one of several configurations available under this part number. While all configurations are compatible, the DRAM combination and/or the module height may vary from what is described here. However, in no configuration will the module height exceed 1.200" (30.48mm).

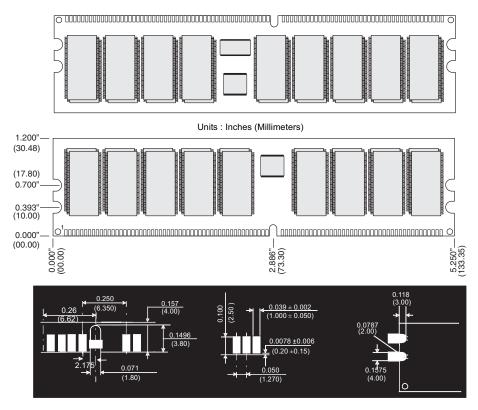


Figure 1: KVR266X72RC25L/2G 184-Pin DDR SDRAM Module