

Features

- Low TCR
- Low electrical noise

Applications

- Motor control
- U.P.S.
- Power supplies
- Metering devices
- Welding

PWR10020 S Series Shunt Resistor

Material Specifications

Resistor.....Metal Plate CuNiMn
Lead Frame.....Nickel Plated Copper


General Information

The Bourns® PWR10020 S Series, manufactured using CuNiMn metal alloy is specially designed for applications requiring high current values and high stability over a wide operating temperature range.

Electrical & Thermal Characteristics


Parameter	Condition	Min.	Nom.	Max.	Unit
Voltage Drop	0 °C < T < 60 °C		60		mV
Tolerance		3.0		5.0	%
TCR			±20.0		PPM/K
Current				150	A
Operating Temperature			-10		+55

Product Dimensions

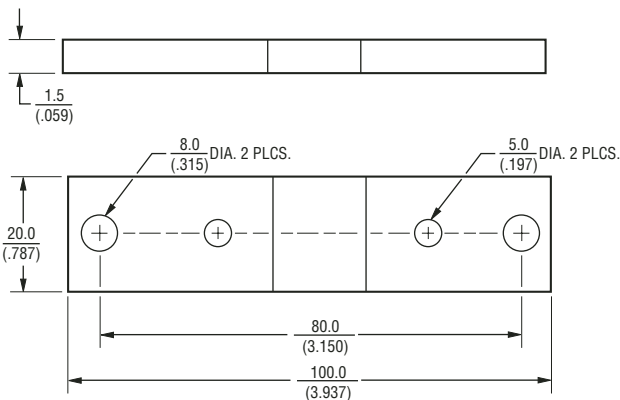

DIMENSIONS = MILLIMETERS
(INCHES)


How to Order

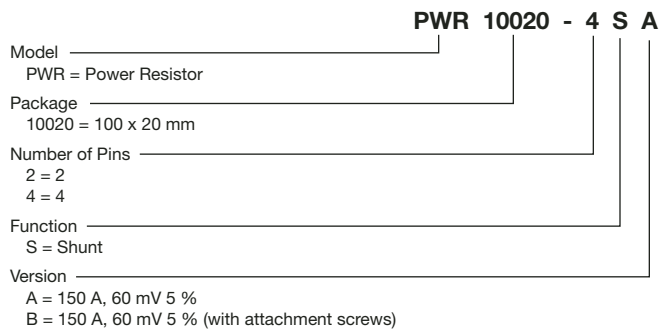

Packaging

30 pcs./box

Typical Part Marking

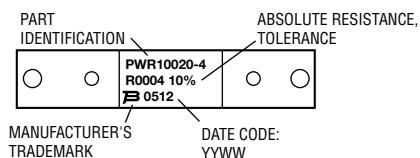

Reliable Electronic Solutions

Asia-Pacific:
Tel: +886-2 2562-4117 • Fax: +886-2 2562-4116
Europe:
Tel: +41-41 768 5555 • Fax: +41-41 768 5510
The Americas:
Tel: +1-951 781-5500 • Fax: +1-951 781-5700
www.bourns.com

www.DataSheet4U.com

*RoHS Directive 2002/95/EC Jan 27 2003, including Annex
Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications.