


SBC

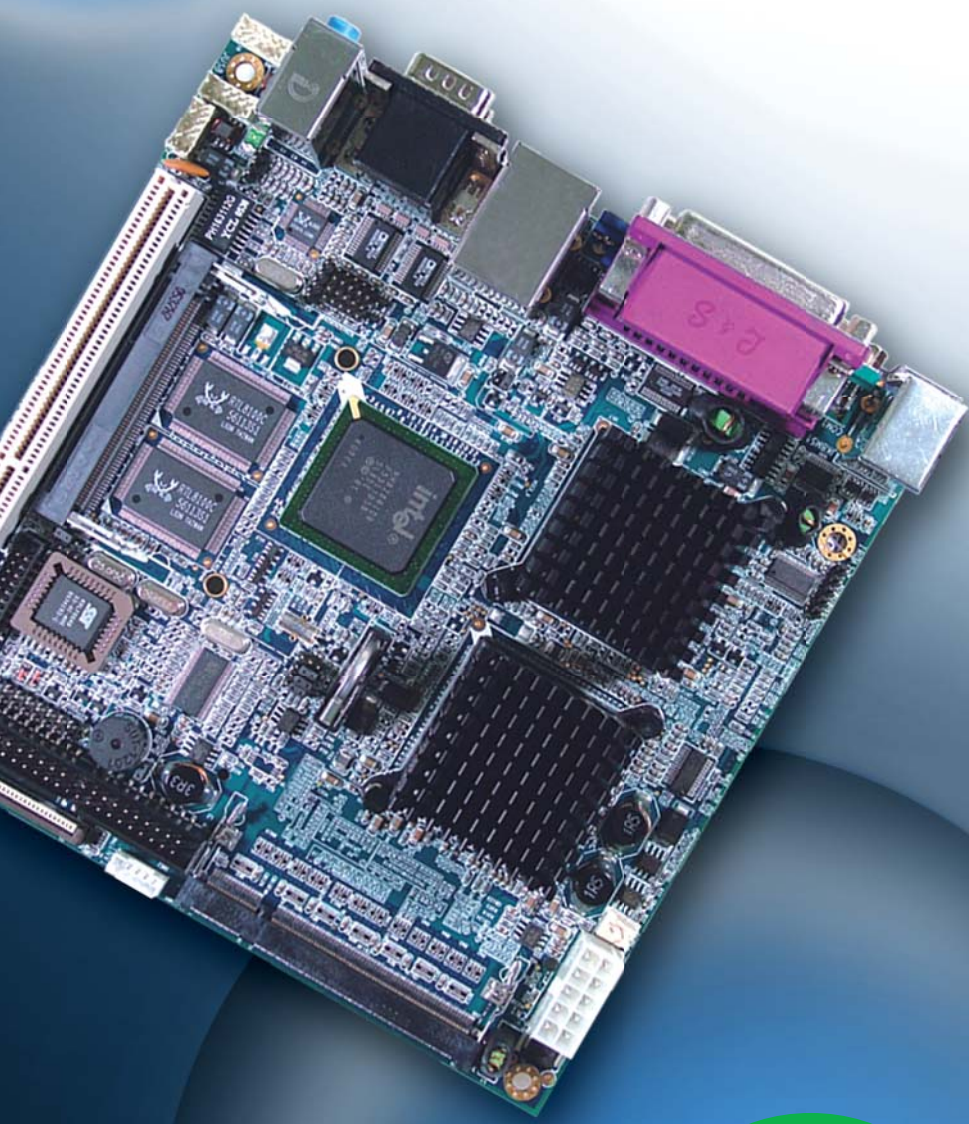

PMB-562LF

UL Pentium® M Mini-ITX Motherboard w / VGA / Audio / 2LAN

Features :

- Support Onboard LV Pentium® M / ULV Celeron® M CPU up to 1.4GHz
- Equipped with Intel® 855GME Chipset with FSB 400MHz
- Memory Supports DDR 333 SDRAM up to 1GB
- Expansion Slots for PCI, Mini-PCI
- Support Compact Flash

Intel®
Communications
Alliance
Affiliate Member
BRONZE

 **PROTECH SYSTEMS**
It's a right choice

No. 24, Lane 365, Yang Guang St., Nei Hu District, Taipei 114, Taiwan, R.O.C.

Tel: +886-2-8751-1111

Fax: +886-2-8751-1199

Email: sales@protech.com.tw

<http://www.protech.com.tw>




ISO CERTIFIED

9001 14001

PMB-562LF

UL Pentium® M Mini-ITX Motherboard w / VGA / Audio / 2LAN

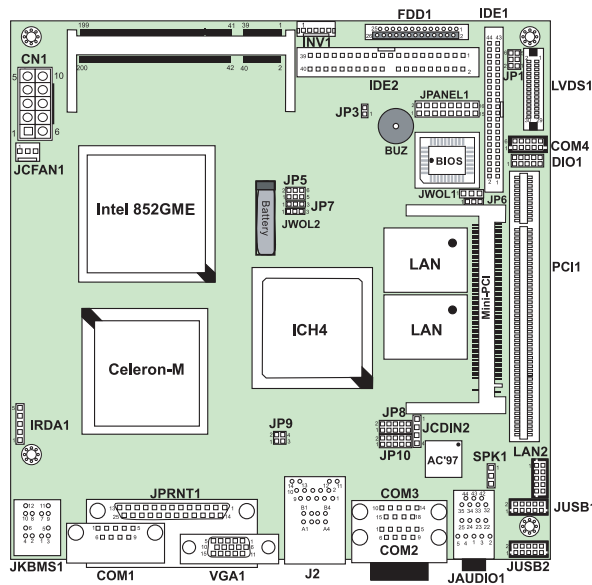

Specifications	
System	
CPU Type	Intel® Pentium® M / Celeron® M processor
CPU Frequency	LV 1.4GHz / ULV 1.0GHz
Chipset	Intel® 855GME + ICH4 (FSB : 400MHz)
DRAM	2 x 200-pin DDR DIMM, Support DDR333 SDRAM up to 2GB
BIOS	Phoenix-Award PnP BIOS, with VGA BIOS
Watchdog	1~255 secs Watchdog timer selectable w / Reset / NMI
Power Supply	Supports AT / ATX power
Power Requirement	+5V, +12V
Dimension	170mm x 170mm (6.69" x 6.69")
I/O Chipset	
IDE Interface	1 x 40-pin IDE (UDMA 33/66/100) 1 x 44-pin IDE (UDMA 33/66/100)
CF	1 x compact flash slot (IDE)
FDD Interface	1
Bus Interface	1 x PCI slots, Mini PCI
Serial Port	4 x COM ports, COM1/3/4 for RS232, COM2 for RS232/422/485 (for 16550 compatible type of UART)
Parallel Port	1 x parallel (SPP / EPP / ECP)
IrDA	1 (SIR)
Keyboard	Mini DIN connector
Mouse	Mini DIN connector
USB	4 x USB 2.0

LAN	LAN 1 : Realtek 8100C (10/100Mbps) LAN 2 : Realtek 8100C (10/100Mbps) Support Wake-on-LAN with ATX power
------------	--

Audio	AC '97 Codec, Realtek ALC202A with Line-in / Line-out / MIC
--------------	---

Display	
Graphic	Built-in Intel® 855GME, share system memory, Supports CRT, LVDS
LCD Interface	18/36-bit LVDS

Environment	
OperationTemp.	0°~60°C(32°~140°F)
Storage Temp.	-40°~85°C(-40°~185°F)
Humidity	Operation humidity 20~90%, Storage humidity 20~95%

Ordering Information	
PMB-562LF	Mini-ITX w P-M LV 1.4GHz / VGA / Audio / LAN x 2 (10/100Mbps) (RoHS version)
PMB-562LF-C10	Mini-ITX w C-M ULV 1.0GHz / VGA / Audio / LAN (10/100Mbps)
Certificate: CE, FCC CLASS A	

All of trademarks and brand names are the property of their owners. Trademark "Protech" is the property of Protech Systems Co., Ltd. All information contained in this document is subject to change without any prior notice. This catalog is copyrighted in May, 2006.