

# "High Frequency Ceramic Solutions"

## 2450 / 5400 MHz Diplexer ( LPF / BPF )

P/N 2450DP15E5400

Detail Specification: 05/12/04

Page 1 of 2

### General Specifications

<b>Part Number</b>	2450DP15E5400		
<b>Attenuation in Low Band Path</b>	* 0.70 dB max. @ 2.4 ~ 2.5 GHz	20 dB min. @ 4.8 ~ 6.0 GHz	20 dB min. @ 7.2 ~ 7.5 GHz
<b>Attenuation in High Band Path</b>	* 1.60 dB max. @ 4.9 ~ 5.875 GHz	17 dB min. @ 1.8 ~ 2.5 GHz	20 dB typ. @ 10.3 ~ 10.7 GHz

<b>Input Power</b>	3 Watts max.
<b>Impedance</b>	50 Ω
<b>Operating Temp</b>	-40 to +85°C
<b>Storage Temp</b>	-40 to +85°C
<b>Reel Quantity</b>	4000

<b>Pass-band Return Loss In Both Bands</b>	9.5 dB min.
--	-------------



\* Note: The I.L. parameters are based on probed & TRL cal'd measurement

### Terminal Configuration

No.	Function
1	Higher Freq. Port (P1)
2	GND
3	Lower Freq. Port (P3)
4	GND
5	Common Port (P2)
6	GND

### Mechanical Dimensions

	In	mm
L	0.079 ± 0.004	2.00 ± 0.10
W	0.049 ± 0.004	1.25 ± 0.10
T	0.035 ± 0.004	0.90 ± 0.10
a	0.012 ± 0.004	0.30 ± 0.10
b	0.008 ± 0.004	0.20 ± 0.10
c	0.012 +.004/-0.008	0.30 +0.1/-0.2
g	0.014 ± 0.004	0.35 ± 0.10
p	0.026 ± 0.002	0.65 ± 0.05

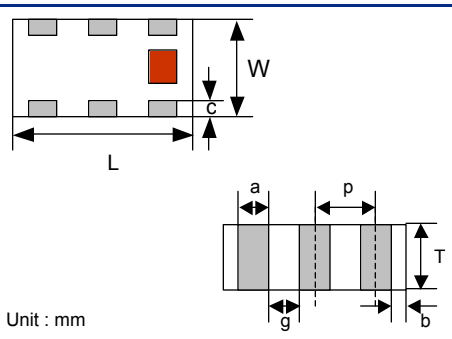


### Mounting Considerations

Mount these devices with brown mark facing up.

Line width should be designed to provide 50Ω impedance matching characteristics.

Units: mm

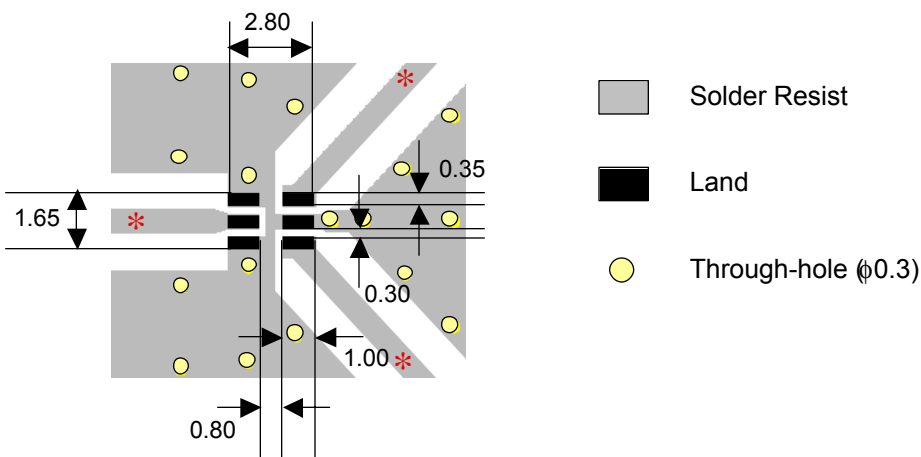

Johanson Technology, Inc. reserves the right to make design changes without notice.  
All sales are subject to Johanson Technology, Inc. terms and conditions.

# "High Frequency Ceramic Solutions"


2450 / 5400 MHz Diplexer ( LPF / BPF)

P/N 2450DP15E5400

Detail Specification: 05/12/04

Page 2 of 2

## Typical Electrical Performance (T=25°C)

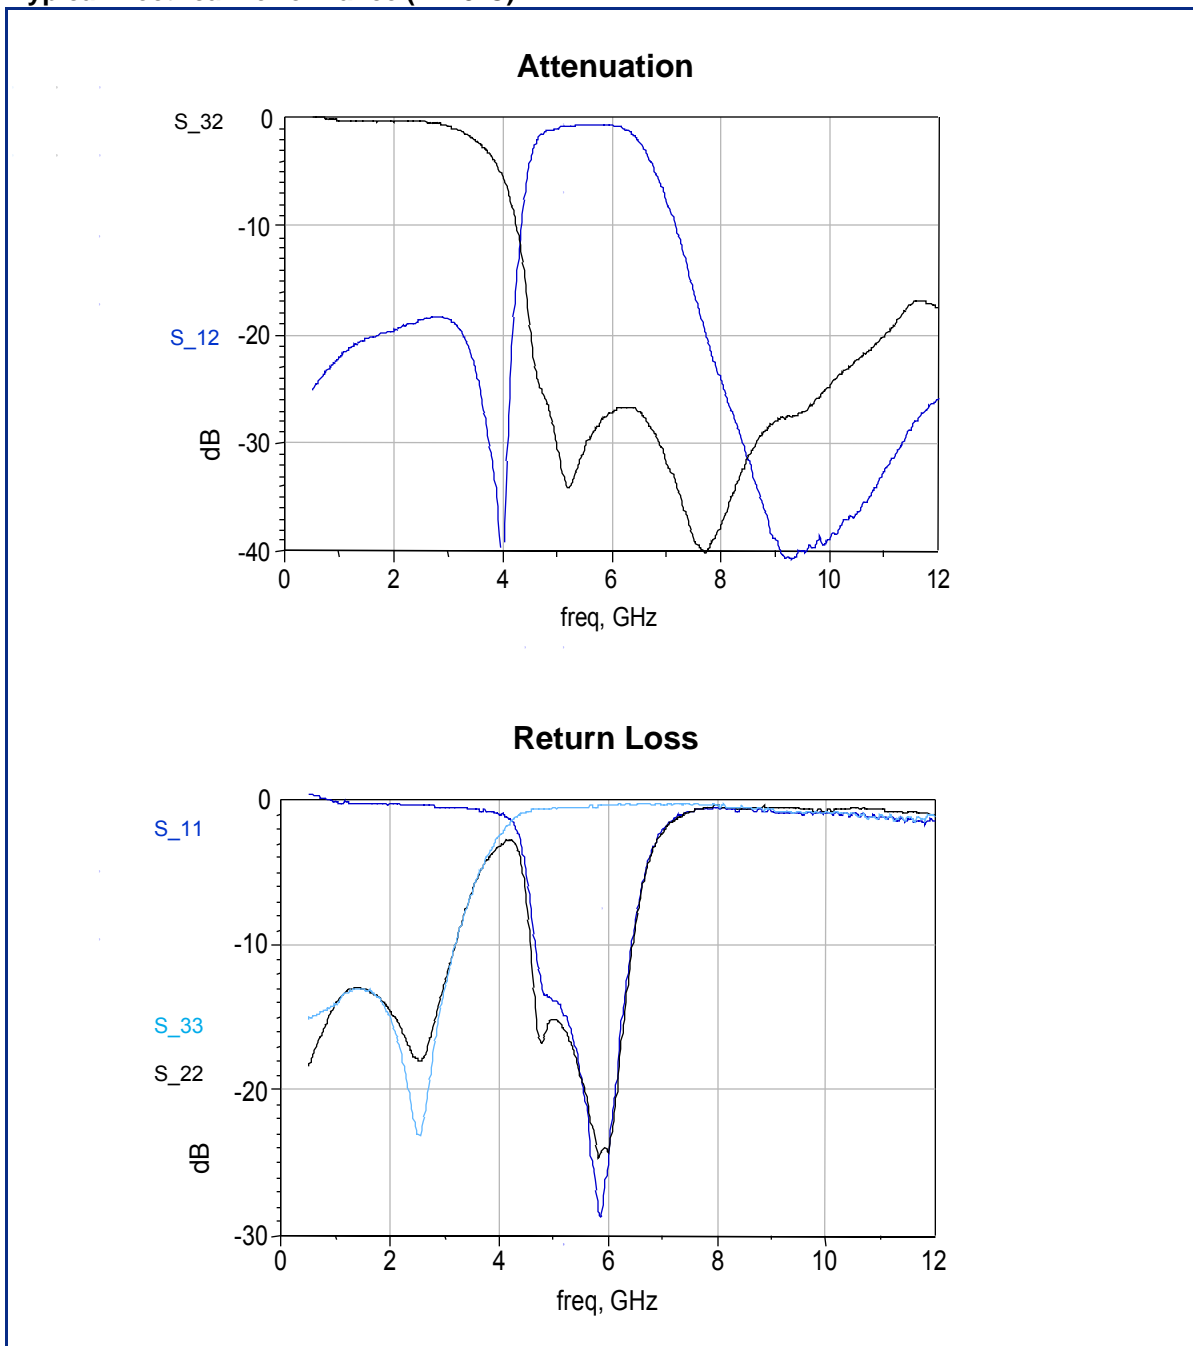

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



[www.johansontechnology.com](http://www.johansontechnology.com)

931 Via Alondra • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2003 Johanson Technology, Inc. All Rights Reserved