


**Ultra Low Dropout
 Linear Regulator
 Hermetic Package**

**OM8502SC
 OM8502SF
 +5.6Vin to +5.0Vout at 3.0A**

Product Summary

Part Number	Dropout	I _o	V _{in}	V _{out}	Package
OM8502SC	0.4 V	3.0A	5.6V	5.0V	MO-078AA
OM8502SF	0.4 V	3.0A	5.6V	5.0V	8-lead Flatpack



The OM8502 is an ultra low dropout linear regulator designed specifically for hi-rel applications. Housed in either a 5 pin through hole or 8 lead surface mount package, these regulators provide high reliability in military/defense applications. The ultra low dropout voltage of 0.4V @ 3A makes the part particularly useful for applications requiring low noise and higher efficiency.

Features:

- Ultra low dropout voltage of 0.4 volt significantly reduces power consumption
- Low noise, higher efficiency
- Remote shutdown permits power sequencing to be easily implemented
- Hermetic MO-078AA (TO-258AA) and 8-lead flat pack ensure higher reliability
- Available H-level screened

Absolute Maximum Ratings

Symbol	Parameter	Value	Units
I _o	Output Current	3.5	A
V _{in}	Input Voltage	+7.0	V
P _{TOT}	Power Dissipation TC=25 °C	19	W
R _{THJC}	Thermal Resistance, Junction to Case (MO-078AA)	6.5	°C/W
R _{THJC}	Thermal Resistance, Junction to Case (8 lead flatpack)	6.5	°C/W
T _J	Operating Junction	-55 to +125	°C
T _{STG}	Storage Temperature Range	-65 to +150	°C
T _L	Lead Temperature	300	°C


Electrical Characteristics @ TA= 25°C (Unless Otherwise Specified)



Parameter	Conditions	Symbol	Min.	Typ.	Max	Unit
Output Voltage	Vin= 5.6V, Io= 3.0A	Vout	4.95	5	5.05	V
Input Voltage Range-Operating	Io= 3.0A		5.4		6.5	V
Line Regulation	5.45≤Vin ≤ 5.75, Io= 3.0A 5.1 ≤ Vin ≤ 6.0, Io= 50mA	Vline	-100 -5		+100 +5	mV mV
Load Regulation	Vin= 5.6V 10ma ≤ Io ≤ 3.0A	Vload	-20		+20	mV
Dropout Voltage	Io= 3.0A, Vout= 5.0V	Vdrop			0.4	V
Current Limit	Vin= 5.6V, Overcurrent Latchup	I latch	3.0			A
Ripple Rejection	F= 120 Hz., Vout= Vref		65			dB
Shutdown Source Current	Vshdn= 5V	Ishdn		200		uA
Shutdown Pin Threshold	Isource= 200uA	Vshdn	1.0		1.6	V
Output Voltage at Shutdown	Vin= 5.6V, Io= 50mA, Shdn= +5.0V	Vout (shdn)	-0.1		+0.1	V

Electrical Characteristics TA= -55 to +125°C

Parameter	Conditions	Symbol	Min.	Typ.	Max	Unit
Output Voltage	Vin= 5.6V, Io= 3.0A	Vout	4.75	5	5.25	V
Input Voltage Range-Operating	Io= 3.0A		5.4		6.5	V
Line Regulation	5.45≤Vin ≤ 5.75, Io= 3.0A 5.1 ≤ Vin ≤ 6.0, Io= 50mA	Vline	-150 -150		+150 +150	mV mV
Load Regulation	Vin= 5.6V 10ma ≤ Io ≤ 3.0A	Vload	-150		+150	mV
Dropout Voltage	Io= 3.0A, Vout= 5.0V	Vdrop			0.4	V
Current Limit	Vin=5.6V, Overcurrent Latchup	I latch	3.0			A
Ripple Rejection	F= 120 Hz., Vout= Vref		65			B
Shutdown Source Current	Vshdn= 5V	Ishdn		200		uA
Shutdown Pin Threshold	Isource= 200uA	Vshdn	1		1.6	V
Output Voltage at Shutdown	Vin= 5.6V, Io= 50mA, Shdn= +5.0V	Vout (shdn)	-0.1		+0.1	V

Simplified Schematic

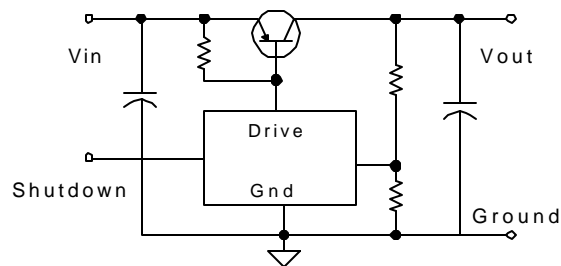

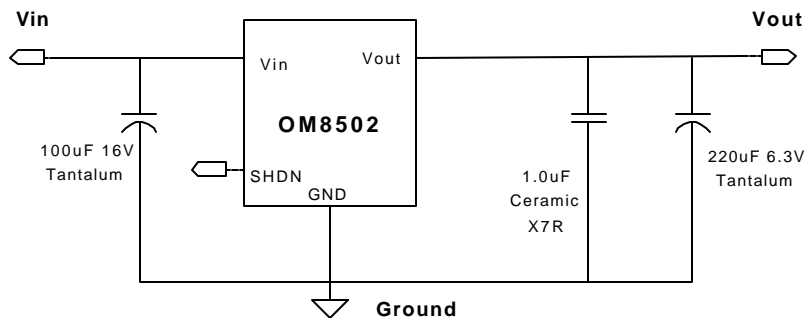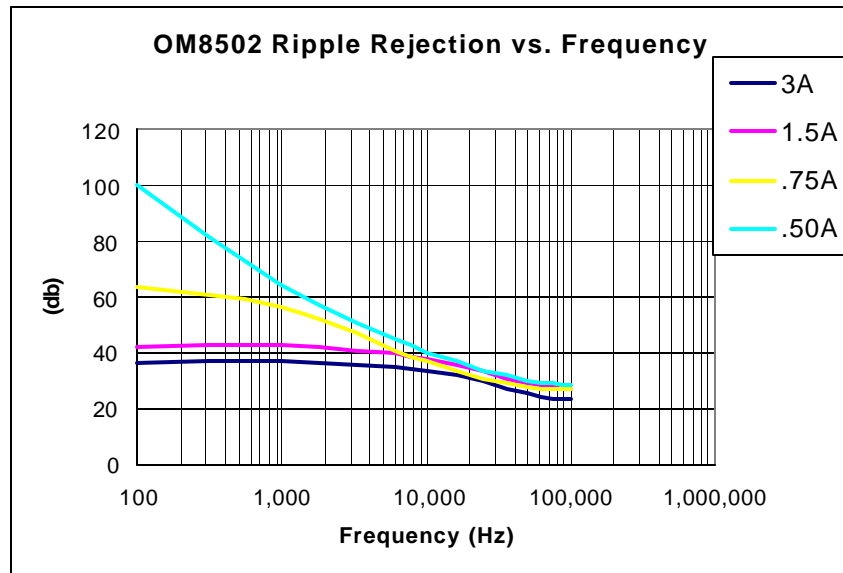

In order to maintain regulation and stability specified additional input and output bulk capacitors are recommended. Capacitors recommended above should be low ESR tantalums with tolerances of +/- 20% max. Internal to the product are a 4.7µF input capacitor and a 4.7µF output capacitor in parallel with a 0.33µF ceramic capacitor.

Shutdown: The regulator can be shutdown by applying a voltage >1.6V to pin 4. The regulator will restart when the SHDN pin is pulled below the shutdown threshold of 1.0V. If remote shutdown is not required, pin 4 should be connected to GND to insure a safe "off" state.

OM8502SC, OM8502SF




Mechanical Outline MO-078AA

Base: GLIDCOP
Pins: Copper core, Alloy 52
Seals: Glass

Pin Connections

Terminal	Description
1	Vin
2	GND
3	Vout
4	Shutdown
5	No Connection

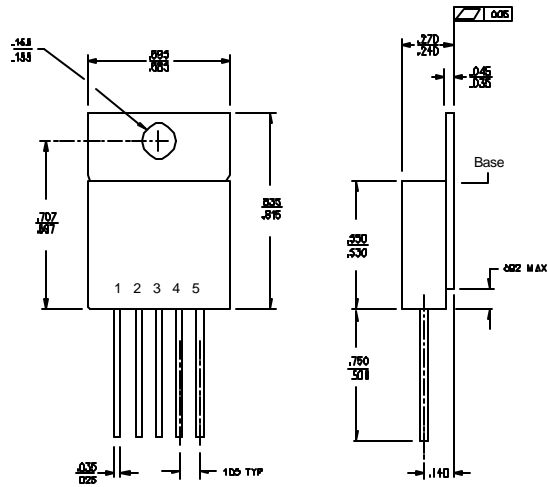


Mechanical Outline 8-Lead Flat Pack

Base: 1010-1018 C.R.S.
Pins: #52 Alloy, Copper Cored
Seals: Glass – 9013 or Equiv.
Finish: 100-250 Microinches Electroless Nickel Over 50-250 Microinches Electrolytic Nickel.

Pin Connections

Terminal	Description
1,2	GND
3	Shutdown
4	No Connection
5,6	Vout
7,8	Vin

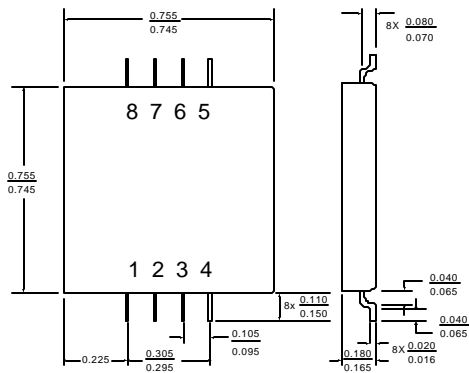

<u>Part Number Nomenclature</u>				
<u>OM</u>	<u>8502</u>	<u>X</u>	<u>X</u>	<u>X</u>
Omnirel	Device	S=Isolated N=Non-Isolated	Package	Screening

Part Number	Package Description	Screening
OM8502SCP	MO-078AA 5 - Lead	100% Final Electrical
OM8502SCH	MO-078AA 5 - Lead	Class H per MIL-PRF-38534
OM8502SFP	8 -Lead Flat Pack	100% Final Electrical
OM8502SFH	8 -Lead Flat Pack	Class H per MIL-PRF-38534

MIL-PRF-38534 Screening Requirements

TEST/INSPECTION	SCREENING LEVEL	MIL-STD-883
	Class H	Method
Pre Seal Burn-In	Optional	1030
Nondestructive Bond Pull	N/A	2023
Internal Visual	100%	2017
Temperature Cycle	100%	1010
Constant Acceleration	100%	2001
Mechanical Shock	100%	2002
PIND	N/A	2020
Pre Burn-In Electrical	Optional	
Burn-In	100%	1015
Final Electrical	100%	
Seal	100%	1014
Radiographic	N/A	2012
External Visual	100%	2009