



**3.0AMPS Surface Mount Schottky Barrier Rectifiers  
SMA/DO-214AC**

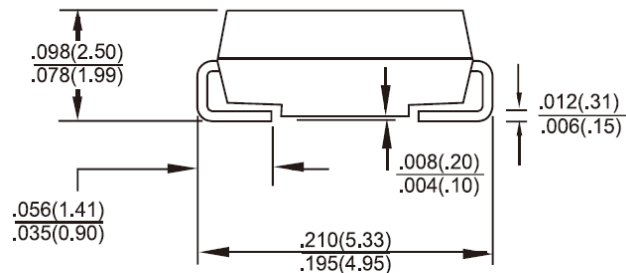

**Features**

- ✧ UL Recognized File # E-326243
- ✧ Low power loss, high efficiency
- ✧ Metal to silicon rectifier, majority carrier conduction
- ✧ High surge current capability, Low VF, Easy pick and place
- ✧ Plastic material used carriers Underwriters Laboratory Classification 94V-0
- ✧ Epitaxial construction
- ✧ Guard-ring for transient protection
- ✧ High temperature soldering guaranteed: 260°C/10s at terminals
- ✧ Meet MSL level 1, per J-STD-020D lead free, maximum peak of 260°C
- ✧ Green compound with suffix "G" on packing code & prefix "G" on datecode

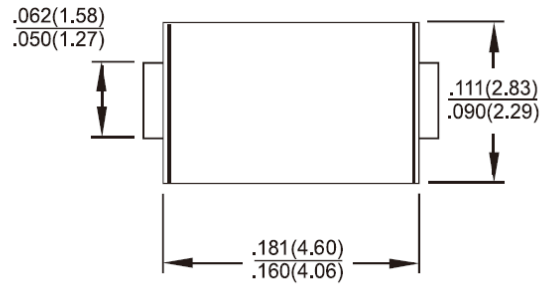

**Mechanical Data**

- ✧ Case: SMA/DO-214AC
- ✧ Lead: Pure tin plated, lead free, solderable per MIL-STD-202, Method 208 guaranteed
- ✧ Polarity: Indicated by cathode band
- ✧ Packaging: 16mm tape per EIA STD RS-481
- ✧ Weight: 0.07 gram

**Dimensions in inches and (millimeters)**

**Marking Diagram**



- SK3XA = Specific Device Code
- G = Green Compound
- Y = Year
- M = Work Month

**Maximum Ratings and Electrical Characteristics**

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	SK 32A	SK 33A	SK 34A	SK 35A	SK 36A	SK 39A	SK 310A	SK 315A	SK 320A	Unit	
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	20	30	40	50	60	90	100	150	200	V	
Maximum RMS Voltage	$V_{RMS}$	14	21	28	35	42	63	70	105	140	V	
Maximum DC Blocking Voltage	$V_{DC}$	20	30	40	50	60	90	100	150	200	V	
Maximum Average Forward Rectified Current	$I_{F(AV)}$	3.0									A	
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load	$I_{FSM}$	70									A	
Maximum Instantaneous Forward Voltage (Note 1) @ 3.0A	$V_F$	0.55			0.75		0.85		0.95		V	
Maximum Reverse Current @ Rated VR $T_A=25\text{ }^\circ\text{C}$ $T_A=100\text{ }^\circ\text{C}$ $T_A=125\text{ }^\circ\text{C}$	$I_R$	0.5					0.1					mA
		10			5.0		-					
		-					0.5					
Typical Junction Capacitance (Note 2)	$C_j$	600			290		110					pF
Typical Thermal Resistance	$R_{\theta JL}$	28									$^\circ\text{C/W}$	
	$R_{\theta JA}$	88										
Operating Temperature Range	$T_J$	- 65 to + 150									$^\circ\text{C}$	
Storage Temperature Range	$T_{STG}$	- 65 to + 150									$^\circ\text{C}$	

Note 1: Pulse Test with PW=300 usec, 1% Duty Cycle

Note 2: Measure at 1 MHz and Applied Reverse Voltage of 4.0V D.C.

## RATINGS AND CHARACTERISTIC CURVES (SK32A THRU SK320A)

FIG.1 FORWARD CURRENT DERATING CURVE

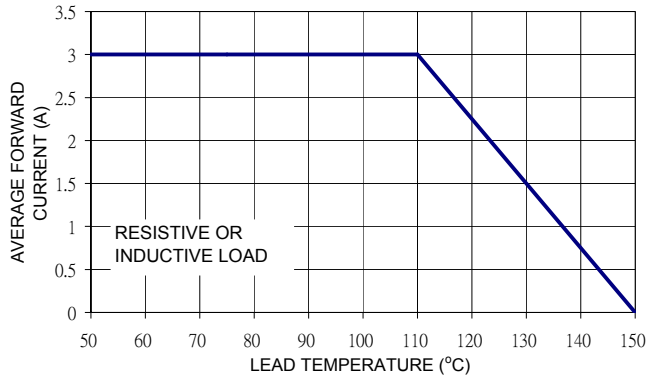


FIG. 2 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

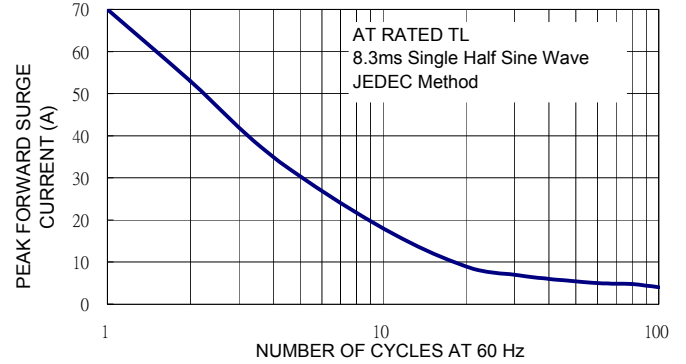


FIG. 3 TYPICAL FORWARD CHARACTERISTICS

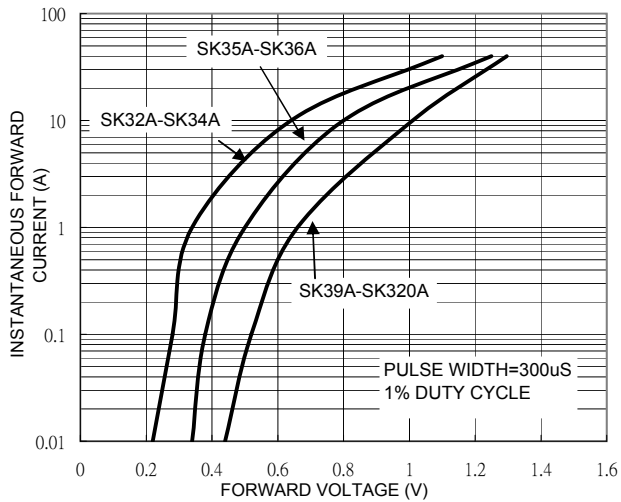


FIG. 4 TYPICAL REVERSE CHARACTERISTICS

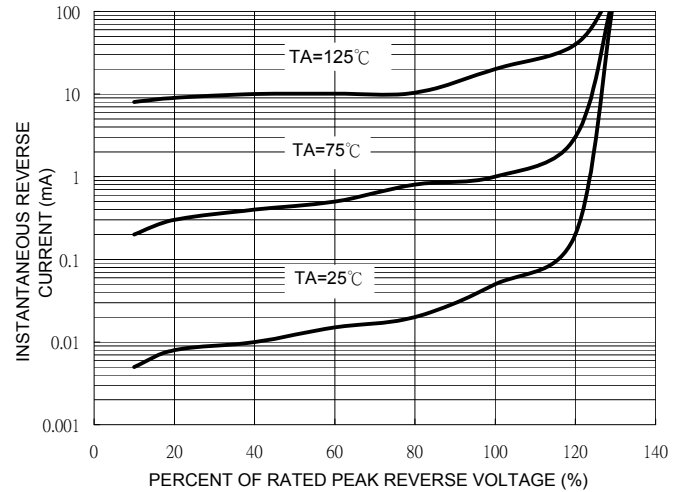


FIG. 5 TYPICAL JUNCTION CAPACITANCE

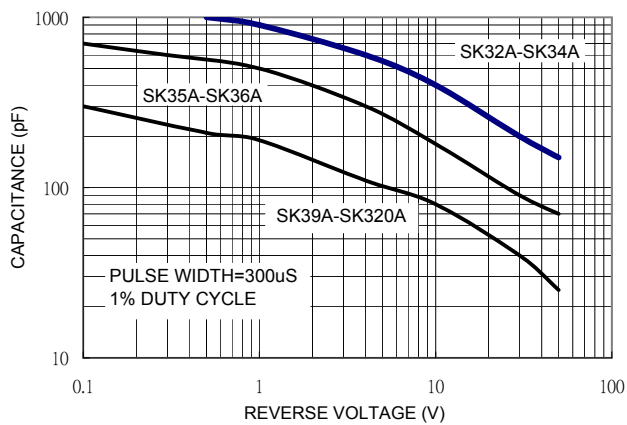


FIG. 6 TYPICAL TRANSIENT THERMAL IMPEDANCE

