

# Agilent T-1<sup>3</sup>/<sub>4</sub> Super Ultra-Bright LED Lamps Data Sheet

HLMP-C115, HLMP-C117, HLMP-C123, HLMP-C215, HLMP-C223,  
HLMP-C315, HLMP-C323, HLMP-C415, HLMP-C423, HLMP-C515,  
HLMP-C523, HLMP-C615, HLMP-C623

## Description

These non-diffused lamps are designed to produce a bright light source and smooth radiation pattern. A slight tint is added to the lens for easy color identification. This lamp has been designed with a

20 mil lead frame, enhanced flange, and tight meniscus controls, making it compatible with radial lead automated insertion equipment.

## Features

- Very high intensity
  - Exceptional uniformity
  - Microtint lens for color identification
  - Consistent viewability
- All colors:**
- AlGaAs Red
  - High Efficiency Red
  - Yellow
  - Orange
  - Green
  - Emerald Green
- 15° and 25° family
  - Tape and reel options available
  - Binned for color and intensity

## Applications

- Ideal for backlighting front panels\*
- Used for lighting switches
- Adapted for indoor and outdoor signs




## Selection Guide


Color	2θ <sup>1/2</sup> [1]	Standoff Leads	Part Number HLMP-	Luminous Intensity Iv (mcd)		
				Min.	Max.	
DH AS AlGaAs	15	No	C115	290.0	–	
			C115-O00xx	290.0	–	
			C115-OP0xx	290.0	1000.0	
	25	No	C117-OP0xx	290.0	1000.0	
			C123	90.2	–	
			C123-L00xx	90.2	–	
Red	15	No	C215	138.0	–	
			C215-M00xx	138.0	–	
			C215-MN0xx	138.0	400.0	
	25	No	C223	90.2	–	
			C223-L00xx	90.2	–	
			C223-MN0xx	138.0	400.0	
Yellow	15	No	C315	147.0	–	
			C315-L00xx	147.0	–	
			C315-LM0xx	147.0	424.0	
	25	No	C323	96.2	–	
			C323-K00xx	96.2	–	
			C323-KL0xx	96.2	294.0	
Orange	15	No	C415	138.0	–	
			C415-M00xx	138.0	–	
			C415-M0D0xx	138.0	–	
	25	No	C415-MN0xx	138.0	400.0	
			C423	90.2	–	
			C423-L00xx	90.2	–	
25	No	C423-LM0xx	90.2	276.0		
		15	No	C515	170.0	–
				C515-L00xx	170.0	–
C515-LM0xx	170.0			490.0		
25	No	C523	69.8	–		
		C523-J00xx	69.8	–		
		C523-KL0xx	111.7	340.0		
Emerald Green	15	No	C615	17.0	–	
			C615-G00xx	17.0	–	
	25	No	C623	6.7	–	
			C623-E00xx	6.7	–	

## Part Numbering System

HLMP - C x xx - x x x xx

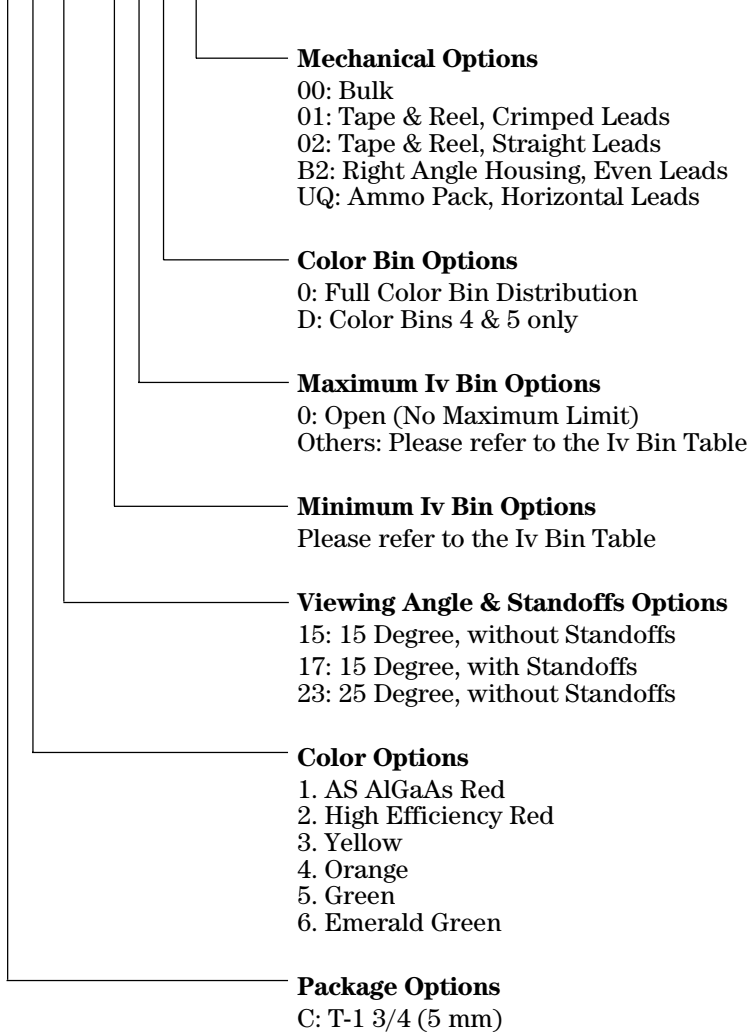

## Package Dimensions

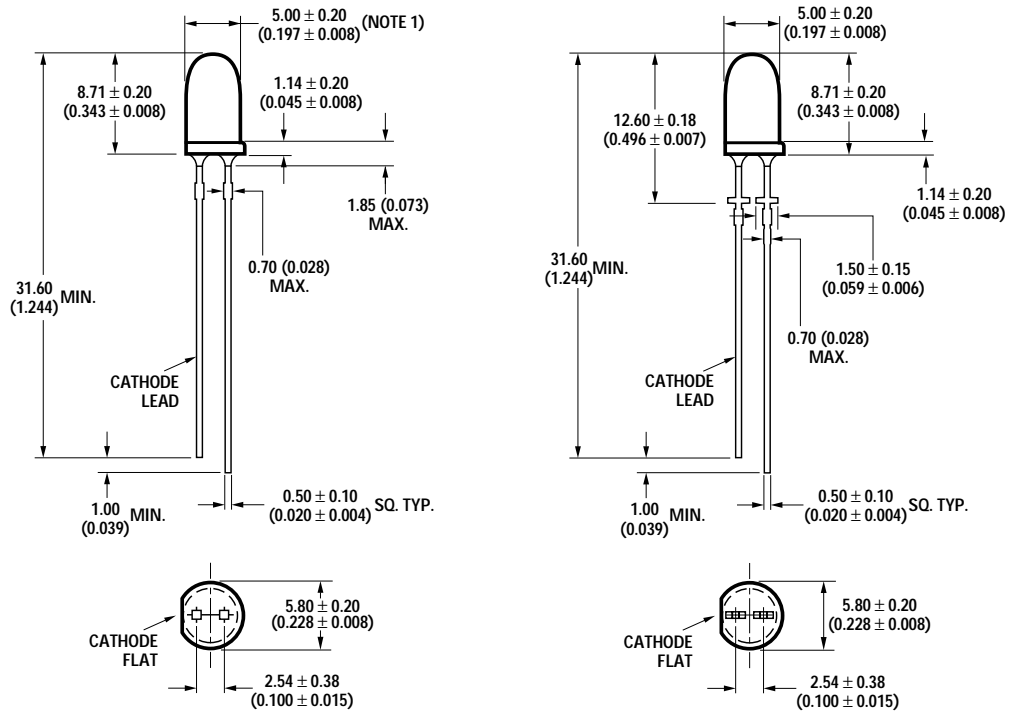

### NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS (INCHES).
2. LEADS ARE MILD STEEL, SOLDER DIPPED.
3. AN EPOXY MENISCUS MAY EXTEND ABOUT 0.5 mm (0.020 in.) DOWN THE LEADS.

## HLMP-Cx15 and HLMP-Cx23

## HLMP-Cx17

### Absolute Maximum Ratings at $T_A = 25^\circ\text{C}$

Parameter	DH AS	High Efficiency		High Performance	Units
	AlGaAs	Red and Orange	Yellow	Green and Emerald Green	
DC Forward Current <sup>[1]</sup>	30	30	20	30	mA
Transient Forward Current <sup>[2]</sup> (10 $\mu\text{sec}$ Pulse)	500	500	500	500	mA
Reverse Voltage ( $I_r = 100 \mu\text{A}$ )	5	5	5	5	V
LED Junction Temperature	110	110	110	110	$^\circ\text{C}$
Operating Temperature Range	-20 to +100	-55 to +100		-20 to +100	$^\circ\text{C}$
Storage Temperature Range		-55 to +100			$^\circ\text{C}$
Wave Soldering Temperature [1.59 mm (0.063 in.) from body]		250 $^\circ\text{C}$ for 3 seconds			
Lead Solder Dipping Temperature [1.59 mm (0.063 in.) from body]		260 $^\circ\text{C}$ for 5 seconds			

### Notes:

1. See Figure 5 for maximum current derating vs. ambient temperature.
2. The transient current is the maximum nonrecurring peak current the device can withstand without damaging the LED die and wire bond.

### Electrical Characteristics at $T_A = 25^\circ\text{C}$

Part Number	Forward Voltage $V_f$ (Volts) @ $I_f = 20\text{ mA}$		Reverse Breakdown $V_r$ (Volts) @ $I_r = 100\ \mu\text{A}$	Capacitance $C$ (pF) $V_f = 0$ $f = 1\text{ MHz}$	Thermal Resistance $R\theta_{J-PIN}$ ( $^\circ\text{C}/\text{W}$ )	Speed of Response $\tau_s$ (ns) Time Constant $e^{-t/\tau_s}$
	Typ.	Max.	Min.	Typ.		Typ.
HLMP-C115 HLMP-C117 HLMP-C123	1.8	2.2	5	30	210	30
HLMP-C215 HLMP-C223	1.9	2.6	5	11	210	90
HLMP-C315 HLMP-C323	2.1	2.6	5	15	210	90
HLMP-C415 HLMP-C423	1.9	2.6	5	4	210	280
HLMP-C515 HLMP-C523	2.2	3.0	5	18	210	260
HLMP-C615 HLMP-C623	2.2	3.0	5	18	210	260

### Optical Characteristics at $T_A = 25^\circ\text{C}$

Part Number	Luminous Intensity $I_v$ (mcd) @ $20\text{ mA}$ <sup>[1]</sup>		Peak Wavelength $\lambda_{\text{peak}}$ (nm)	Color, Dominant Wavelength $\lambda_d$ <sup>[2]</sup> (nm)	Viewing Angle $2\theta_{1/2}$ (Degrees) <sup>[3]</sup>	Luminous Efficacy $\eta_v$ (lm/w)
	Min.	Typ.	Typ.	Typ.	Typ.	
HLMP-C115 HLMP-C117	290	600	645	637	11	80
HLMP-C123	90	200			26	
HLMP-C215	138	300	635	626	17	145
	90	170			23	
HLMP-C315	146	300	583	585	17	500
	96	170			25	
HLMP-C415	138	300	600	602	17	380
	90	170			23	
HLMP-C515	170	300	568	570	20	595
	69	170			28	
HLMP-C615	17	45	558	560	20	656
	6	27			28	

#### Notes:

1. The luminous intensity,  $I_v$ , is measured at the mechanical axis of the lamp package. The actual peak of the spatial radiation pattern may not be aligned with this axis.
2. The dominant wavelength,  $\lambda_d$ , is derived from the CIE Chromaticity Diagram and represents the color of the device.
3.  $2\theta_{1/2}$  is the off-axis angle where the luminous intensity is 1/2 the on-axis intensity.

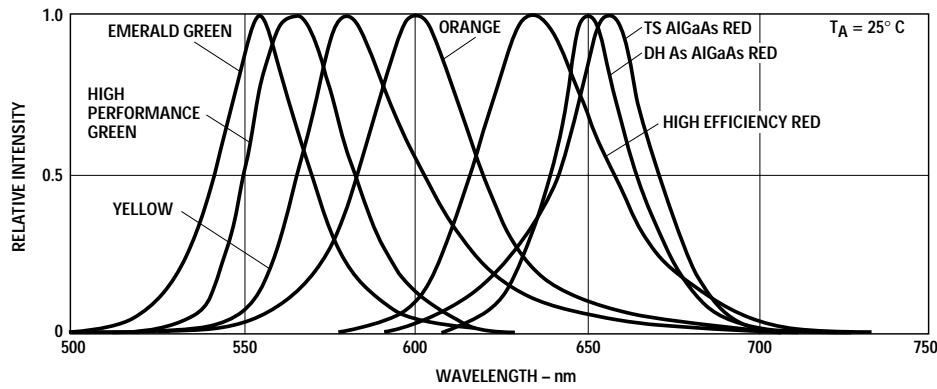


Figure 1. Relative intensity vs. wavelength.

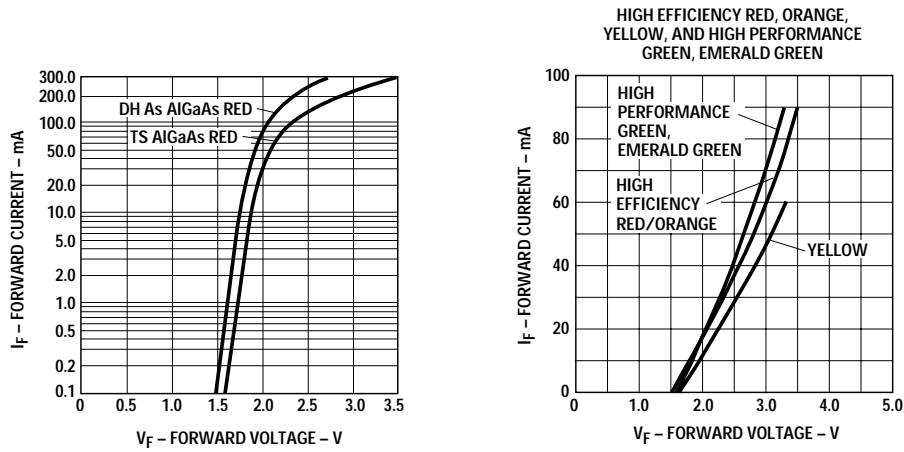


Figure 2. Forward current vs. forward voltage (non-resistor lamp).

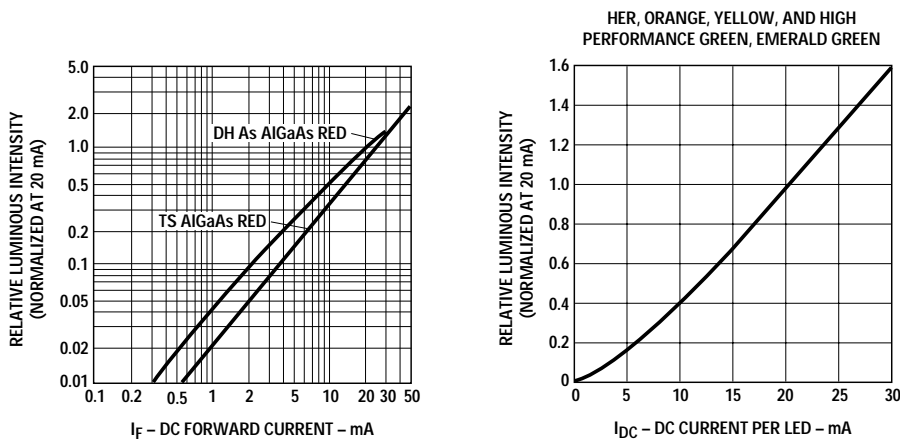


Figure 3. Relative luminous intensity vs. forward current.

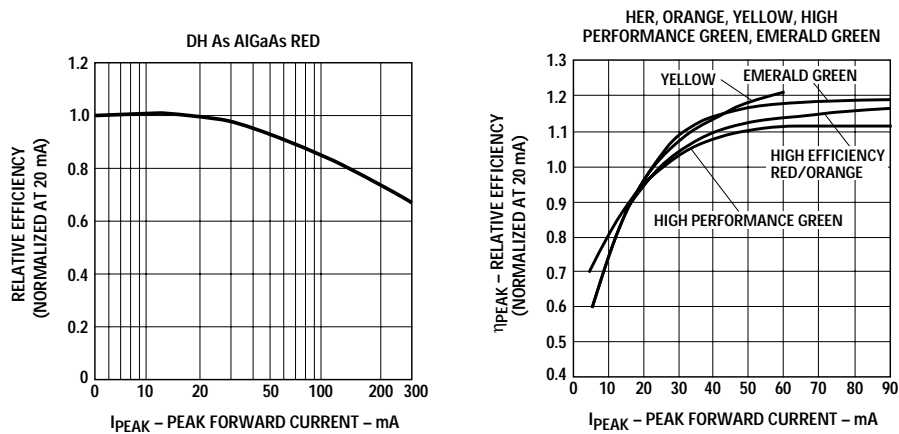


Figure 4. Relative efficiency (luminous intensity per unit current) vs. peak current.

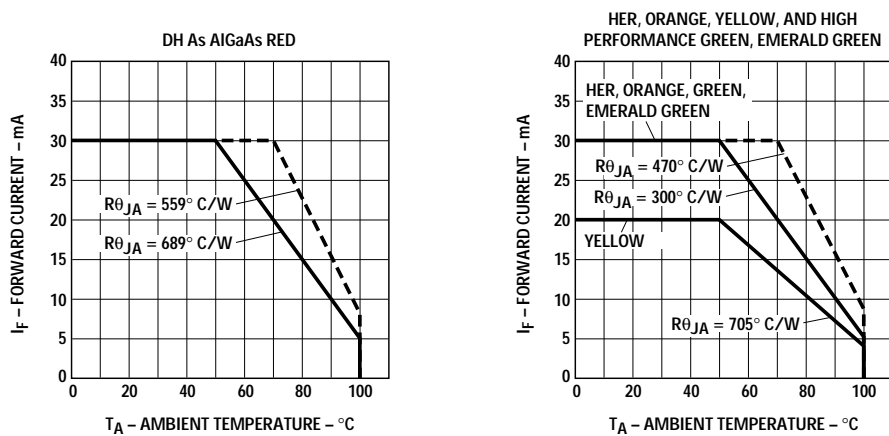


Figure 5. Maximum forward dc current vs. ambient temperature. Derating based on T<sub>J</sub>MAX = 110°C.

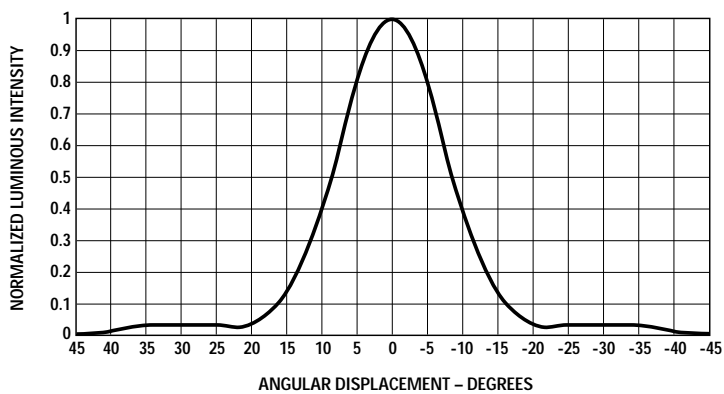


Figure 6. Relative luminous intensity vs. angular displacement. 15 degree family.

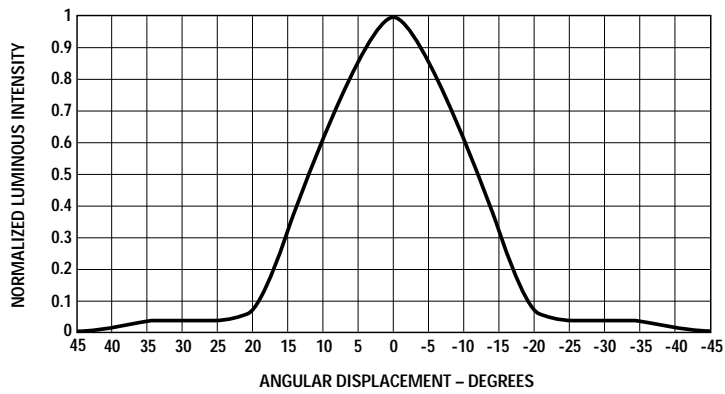


Figure 7. Relative luminous intensity vs. angular displacement. 25 degree family.

### Intensity Bin Limits

Color	Bin	Intensity Range (mcd)	
		Min.	Max.
Red/Orange	L	101.5	162.4
	M	162.4	234.6
	N	234.6	340.0
	O	340.0	540.0
	P	540.0	850.0
	Q	850.0	1200.0
	R	1200.0	1700.0
	S	1700.0	2400.0
	T	2400.0	3400.0
	U	3400.0	4900.0
	V	4900.0	7100.0
	W	7100.0	10200.0
	X	10200.0	14800.0
Y	14800.0	21400.0	
Z	21400.0	30900.0	
Yellow	L	173.2	250.0
	M	250.0	360.0
	N	360.0	510.0
	O	510.0	800.0
	P	800.0	1250.0
	Q	1250.0	1800.0
	R	1800.0	2900.0
	S	2900.0	4700.0
T	4700.0	7200.0	
U	7200.0	11700.0	
V	11700.0	18000.0	
W	18000.0	27000.0	



### Intensity Bin Limits, continued

Color	Bin	Intensity Range (mcd)	
		Min.	Max.
Green/ Emerald Green	E	7.6	12.0
	F	12.0	19.1
	G	19.1	30.7
	H	30.7	49.1
	I	49.1	78.5
	J	78.5	125.7
	K	125.7	201.1
	L	201.1	289.0
	M	289.0	417.0
	N	417.0	680.0
	O	680.0	1100.0
	P	1100.0	1800.0
	Q	1800.0	2700.0
	R	2700.0	4300.0
	S	4300.0	6800.0
T	6800.0	10800.0	
U	10800.0	16000.0	
V	16000.0	25000.0	
W	25000.0	40000.0	

Maximum tolerance for each bin limit is  $\pm 18\%$ .

### Color Categories

Color	Category #	Lambda (nm)	
		Min.	Max.
Green	6	561.5	564.5
	5	564.5	567.5
	4	567.5	570.5
	3	570.5	573.5
	2	573.5	576.5
Yellow	1	582.0	584.5
	3	584.5	587.0
	2	587.0	589.5
	4	589.5	592.0
	5	592.0	593.0
Orange	1	597.0	599.5
	2	599.5	602.0
	3	602.0	604.5
	4	604.5	607.5
	5	607.5	610.5
	6	610.5	613.5
	7	613.5	616.5
	8	616.5	619.5

Tolerance for each bin limit is  $\pm 0.5$  nm.

## Mechanical Option Matrix

Mechanical Option Code	Definition
00	Bulk Packaging, minimum increment 500 pcs/bag
01	Tape & Reel, crimped leads, minimum increment 1300 pcs/bag
02	Tape & Reel, straight leads, minimum increment 1300 pcs/bag
B2	Right Angle Housing, even leads, minimum increment 500 pcs/bag
UQ	Ammo Pack, horizontal leads, in 1K minimum increment

**Note:**

All categories are established for classification of products. Products may not be available in all categories. Please contact your local Agilent representative for further clarification/information.

### [www.agilent.com/semiconductors](http://www.agilent.com/semiconductors)

For product information and a complete list of distributors, please go to our web site.

For technical assistance call:

Americas/Canada: +1 (800) 235-0312 or  
(916) 788-6763

Europe: +49 (0) 6441 92460

China: 10800 650 0017

Hong Kong: (+65) 6756 2394

India, Australia, New Zealand: (+65) 6755 1939

Japan: (+81 3) 3335-8152 (Domestic/International), or 0120-61-1280 (Domestic Only)

Korea: (+65) 6755 1989

Singapore, Malaysia, Vietnam, Thailand,  
Philippines, Indonesia: (+65) 6755 2044

Taiwan: (+65) 6755 1843

Data subject to change.

Copyright © 2004 Agilent Technologies, Inc.

Obsoletes 5965-6165E

November 11, 2004

5988-2149EN



**Agilent Technologies**