

1

2

3

4

PRODUCT NUMBER

10072353-X01-XXXLF

PLATING

S = 0.38µm GOLD/GXT ON CONTACT AREA
2.0µm MIN MATTE TIN ON TAIL
OVER 1.27µm MIN NICKEL

G = 0.76µm GOLD/GXT ON CONTACT AREA
2.0µm MIN MATTE TIN ON TAIL
OVER 1.27µm MIN NICKEL

F = GOLD FLASH ON CONTACT AREA
2.0µm MIN MATTE TIN ON TAIL
OVER 1.27µm MIN NICKEL

RoHS COMPATIBLE
NOTE 6

PACKAGING
NOTE 5

NB OF POSITIONS PER ROW
02 TO 25 POS

NOTES:

- 1. MATERIAL HOUSING: HIGH TEMP. THERMOPLASTIC
UL 94V-0, COLOR BLACK
- 2. MATERIAL TERMINAL: COPPER ALLOY
- 3. TO DETERMINE DIMENSIONS:
N = NUMBER OF POSITIONS PER ROW.
- 4. 7N MIN PIN RETENTION IN EITHER DIRECTION.
- 5. PACKAGING :
= PLASTIC BOX
U = TUBE AVAILABLE FROM 06 TO 50 POS
- 6. RoHS COMPATIBLE PRODUCT SPECIFICATIONS

a - PLATING

= "LF" MEANS THE PRODUCT IS LEAD-FREE
2µm MINIMUM MATTE TIN OVER 1.27µm
MINIMUM NICKEL UNDERPLATE.





b - MANUFACTURING PROCESS COMPATIBILITY

- THE HOUSING WITHSTAND EXPOSURE TO
260°C PEAK TEMPERATURE FOR
30 SECONDS MAX IN A CONVECTION, INRA-RED
OR VAPOR PHASE OR REFLOW OVEN.

c - LABELLING:

- MEETS PACKAGING SPECS AS PER GS-14-920.

d - THIS PRODUCT MEETS EUROPEAN DIRECTIVES
AND OTHER COUNTRY REGULATIONS AS DISCRIBED
IN GS-22-008

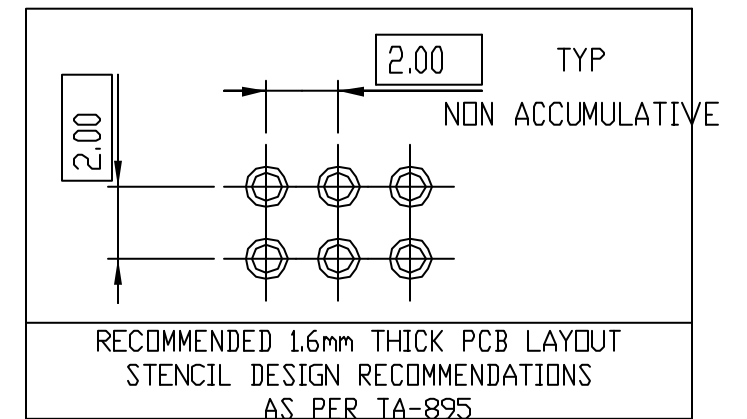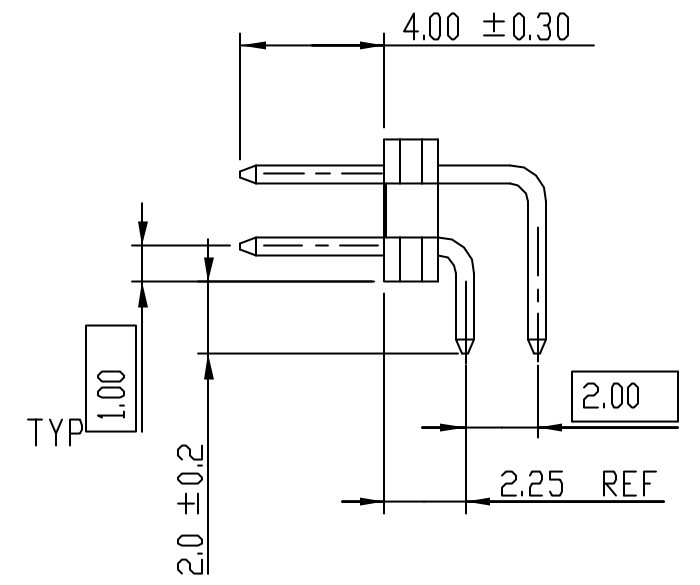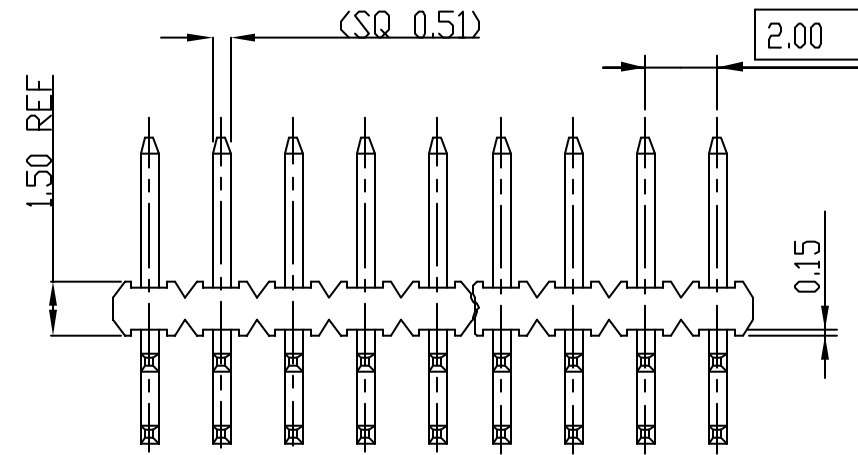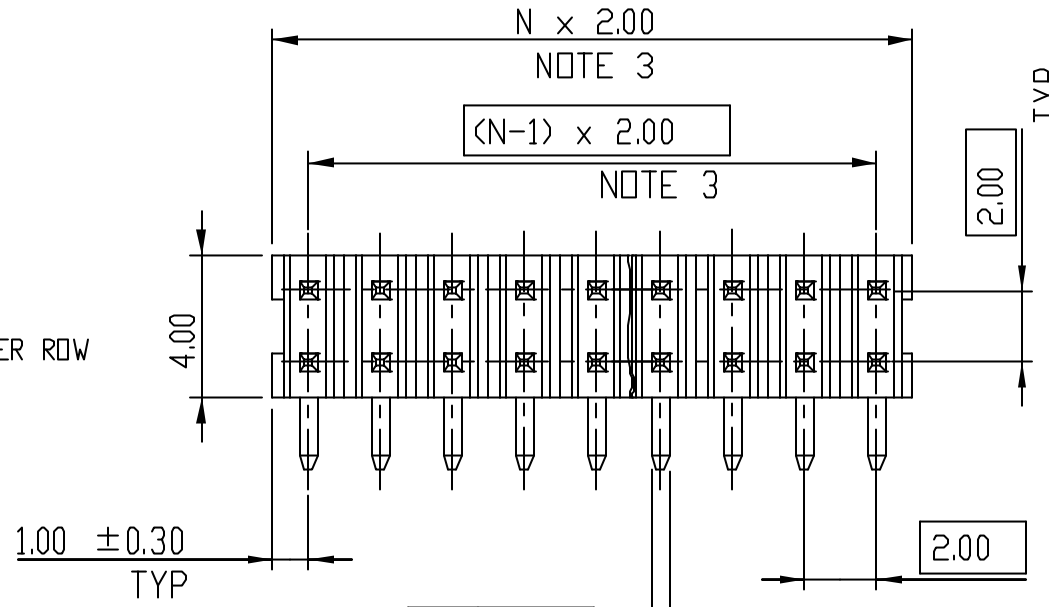

rev	ecn no	dr	date
A	F06-0326	LMU	07.01.04
B	F08-0145	ELA	17.04.08
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com		surface - ✓ ISO 1302	tolerance std ISO 406 ISO 1101	projection mm
TOLERANCES UNLESS OTHERWISE SPECIFIED		ANGULAR LINEAR		size A3
Dr	L MULIN	06.09.14	0.X ± 0.13	Scale 5:1
Eng	J COMPAGNON	06.09.14	0.XX ± 0.05	ECN -
Chr	-	-	0.XXX ±	Spec ref -
Appr	J.M.C	06.09.14	Product family Minitek	
title UNSHR HEADER		dwg no 10072353		Rev. B
catalog no		CUSTOMER Drawing		sheet 1 of 1



Copyright FCI.

REV C - 2007-03-28

1

2

3

4