
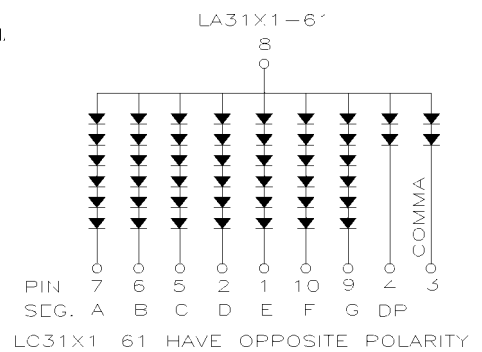
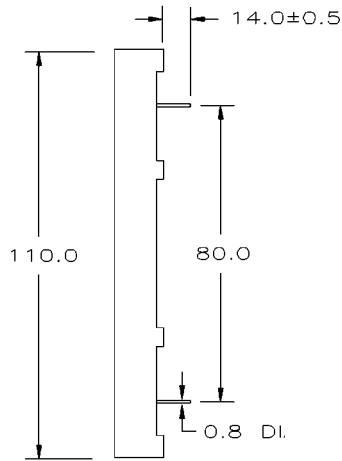


Ledtech SINGLE DIGIT DISPLAY

3.0" SINGLE DIGIT DISPLAY Electrical/Optical Characteristics at $T_A=25^\circ\text{C}$ & $I_F=20\text{mA}$

PART NUMBER	CHIP COLOR	λ_p (nm)	V_F (V)		I_V (mcd)	
			SEG.	DP.	MIN.	TYP.
			TYP.	MAX.		
LA(C)3121-61EWEW	GREEN	572	12.6	4.2	10.4	17.3
LA(C)3131-61EWEW	YELLOW	589	12.6	4.2	8.4	14.0
LA(C)3141-61EWEW	ORANGE	630	12.6	4.2	16.7	19.8
LA(C)3141R-61EWEW	ORANGE	630	12.6	4.2	16.7	19.8
LA(C)3171-61-M1EWEW	RED	660	10.2	3.4	27.8	46.3
LA(C)3151-61EWEW	RED	700	12.6	4.2	2.8	4.7

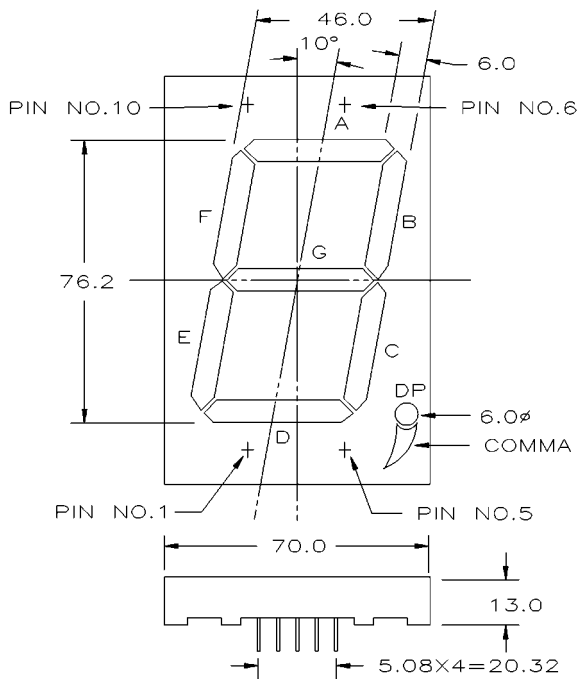

- LA31X1-61
COMMON ANODE
PIN**
- | NO. | FUNCTION |
|-------------|----------|
| 1. CATHODE | E |
| 2. CATHODE | D |
| 3. CATHODE | COMMA |
| 4. CATHODE | DP |
| 5. CATHODE | C |
| 6. CATHODE | B |
| 7. CATHODE | A |
| 8. COMMON | ANODE |
| 9. CATHODE | G |
| 10. CATHODE | F |

- LC31X1-61
COMMON CATHODE
PIN**
- | NO. | FUNCTION |
|-----------|----------|
| 1. ANODE | E |
| 2. ANODE | D |
| 3. ANODE | COMMA |
| 4. ANODE | DP |
| 5. ANODE | C |
| 6. ANODE | B |
| 7. ANODE | A |
| 8. COMMON | CATHODE |
| 9. ANODE | G |
| 10. ANODE | F |