

# RF AMPLIFIER

## MODEL *TM9714*

Available as: TM9714, 4 Pin TO-8 (T4)

### Features

- High Output Power: >27 dBm Typical
- High Third Order Intercept: +39 dBm Typical
- Operating Temp. - 55 °C to +85 °C
- Environmental Screening Available

### Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	10 - 2000 MHz	10 - 2000 MHz
Gain (dB)	11	10 Min.
Power @ 1 dB Comp. (dBm)	>+27	+26.0 Min.
Reverse Isolation (dB)	-18.0	-17.0 Max.
VSWR In	<1.75:1	2.0:1 Max.
Out	<1.75:1	2.0:1 Max.
Noise Figure (dB)	<4.5	5.5* Max.
Power Vdc	+12	+12
mA	180	200 Max.

Note: Care should always be taken to effectively ground the case of each unit.  
\* Noise Figure is > 5.5 dB below 100 MHz


### Typical Intermodulation Performance at 25 ° C

Second Order Harmonic Intercept Point ..... +54 dBm (Typ.)  
Second Order Two Tone Intercept Point ..... +48 dBm (Typ.)  
Third Order Two Tone Intercept Point ..... +39 dBm (Typ.)

### Maximum Ratings

Ambient Operating Temperature ..... -55°C to + 100 °C  
Storage Temperature ..... -62°C to + 125 °C  
Case Temperature ..... + 125 °C  
DC Voltage ..... + 15 Volts  
Continuous RF Input Power ..... + 20 dBm  
Short Term RF Input Power .... 200 Milliwatts (1 Minute Max.)  
Maximum Peak Power ..... 0.5 Watt (3 µsec Max.)

### Typical Performance Data

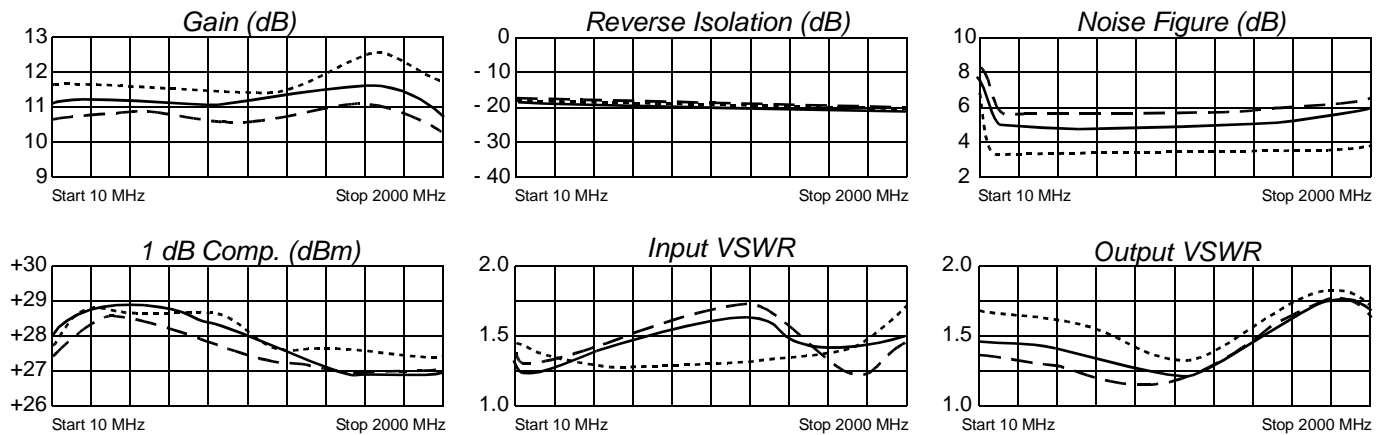

Legend ——— + 25 °C    - - - - + 85 °C    ······ -55 °C

#### Linear S-Parameters

FREQ. MHz	S11		S21		S12		S22	
	Mag.	Deg.	Mag.	Deg.	Mag.	Deg.	Mag.	Deg.
10	.13	-118	3.46	-170	.128	8	.17	163
100	.09	-168	3.53	171	.127	- 4	.15	166
200	.08	-168	3.51	161	.126	- 9	.15	156
400	.08	-149	3.45	142	.128	- 20	.12	134
600	.09	-123	3.37	122	.122	- 32	.09	117
800	.17	-122	3.18	105	.112	- 40	.09	103
1000	.18	-134	3.24	89	.113	- 49	.09	60
1200	.18	-136	3.35	70	.111	- 59	.09	12
1400	.19	-134	3.43	49	.111	- 71	.11	- 28
1600	.19	-142	3.39	25	.101	- 89	.14	- 66
1800	.14	-136	3.37	1	.102	-100	.18	- 81
2000	.05	- 78	3.09	- 26	.086	-116	.21	-110



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532 3/31/04

www.spectrummicrowave.com Spectrum Microwave (Europe) · 2707 Black Lake Place · Philadelphia, Pa. 19154 · PH (215) 464-4000 · Fax (215) 464-4001