




Dimensions mm[inch]
 tolerances acc. to DIN ISO 2768-m
 Toleranzen gem. DIN ISO 2768-m

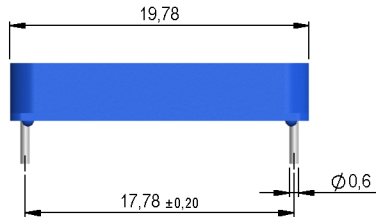

Isometric
 Scale 1:2
 Maßstab 1:2



Remark
 angular variation of the pins up to 7,5° possible
 Winkelabweichung der Anschlußbeine bis zu 7,5° möglich

Marking
 according to EN60062/factory code
 gem. EN60062/Fertigungsstätte

MEDER M06-7 YM

Special Product Data	Conditions	Min	Typ	Max	Unit
Sealing compound		Polyurethan			
Housing material		PBT glass fibre reinforced			
Case color		blue			

Environmental data	Conditions	Min	Typ	Max	Unit
Operating temperature		-20		80	°C

Mag. values DIN IEC 60404-8-	Conditions	Min	Typ	Max	Unit
Energy product (B x H) max.		35	39,8		kJ/cu m
Remanence Br		1.120	1.240		mT
Revers. temp. coeff. of Br			-0,02		%/K
Coercivity HcB		47	51,3		kA/m
Coercivity HcJ		48	51,7		kA/m
Max. operating temperature				450	°C
Magnetic moment	measured with MS150	5,1	5,3		E-6 Vs*cm
Magnet Material		AlNiCo			
Direction of Magnetization		axial			

General data	Conditions	Min	Typ	Max	Unit
Housing Style/Form		MK06			
Remarks		All details according to manufacturers information			