

6A Non-isolated SMT Point Of Load

Features

- ◆ DOSA Compatible Footprint
- ◆ Surface Mountable
- ◆ Constant Switching Frequency
- ◆ Edge Plated Castellations (EPC)
 - Inspectable Solder Joints
- ◆ No external loop tuning components needed
- ◆ Excellent Transient Response



Key Market Segments & Applications




Specifications		
Model		
		iCG05
		iCG12
DC Output Voltage	V	0.6 - 3.63
DC Input Voltage	V	2.4 - 5.5
Efficiency	%	84 - 93
Output Voltage Tolerance	%	±3
Switching Frequency	kHz	600
Line Regulation	mV	3
Load Regulation	mV	6
External Load Capacitance	uF	47 - 1000
Output Ripple and Noise	mVpp	15
Overcurrent Protection	A	Hiccup Type
Remote On / Off	-	Negative Logic (For Positive Logic Contact Factory)
Remote Sense	-	(+) Sense, compensating up to 0.5V
Power Good	-	Not available
Operating Temp	°C	-40 to 115 (see thermal data on website)
Storage Temperature	°C	-55 to 125
Safety Agency Approvals	-	UL60950-1, CSA 22.2 No.60950-1-03; VDE CB scheme (IEC60950-1, EN60950-1)
Weight	g / oz	3g / 0.106 oz
Size (LxWxH)	mm / in.	12.2 x 12.2 x 8.5 / 0.48 x 0.48 x 0.335
Warranty	yrs	3 years

Model Selector

Model	Input Voltage (V)	Output Current (A)	Output Voltage (V)	Positive Logic On/Off	Negative Logic On/Off	Sequencing	EPC Solder Bumping
iCG05006A006V-003-R	2.4 - 5.5	6	0.6 - 3.63	-	yes	-	yes*
iCG12006A007V-003-R	4.5 - 14	6	0.7 - 5.5	-	yes	-	yes*

*For LGA solder bumping specify -007-R model suffix

Outline Drawing

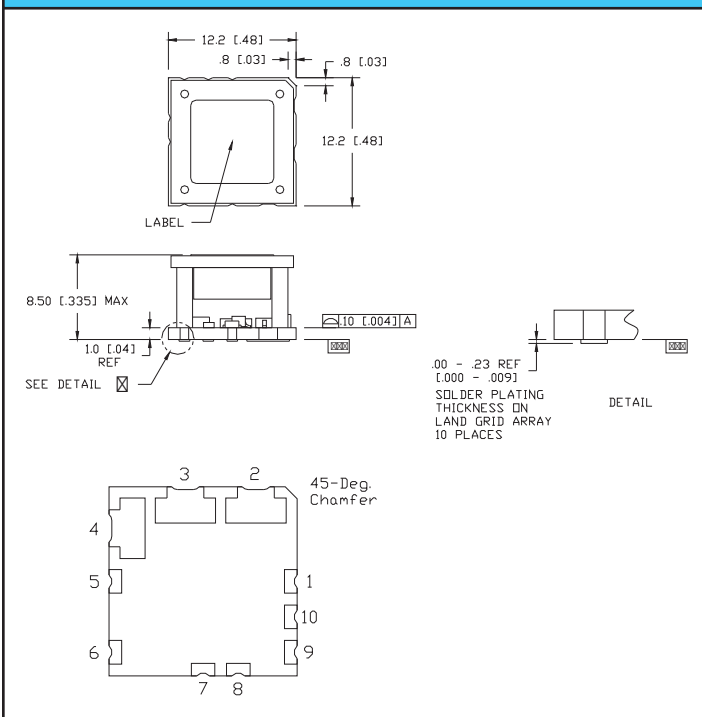

Pinout

PIN	Function	PIN	Function
1	ON / OFF	6	TRIM
2	VIN	7	GND
3	GND	8	no connection
4	VOU	9	reserved
5	SENSE	10	PWR GOOD

Other Industrial Products

CC-E	1.5 - 30W 5, 12, 24 or 48V input isolated DC-DC converters
PX	10 - 60W 12, 24 or 48V input isolated DC-DC converters
iAF, iBF, iCF	3 - 20A DOSA2 non isolated DC-DC converters

For Additional Information, please visit us.tdk-lambda.com/lp/products/icg-series.htm

