


DATE	SYM	REVISION RECORD	AUTH.	DR.	CK.
10/1/97	-	ISSUED		NT	MM
10/28/99	A	OTHERWISE SPECIFIED TOLERANCE $\pm .005$ WAS $\pm .010$		NT	

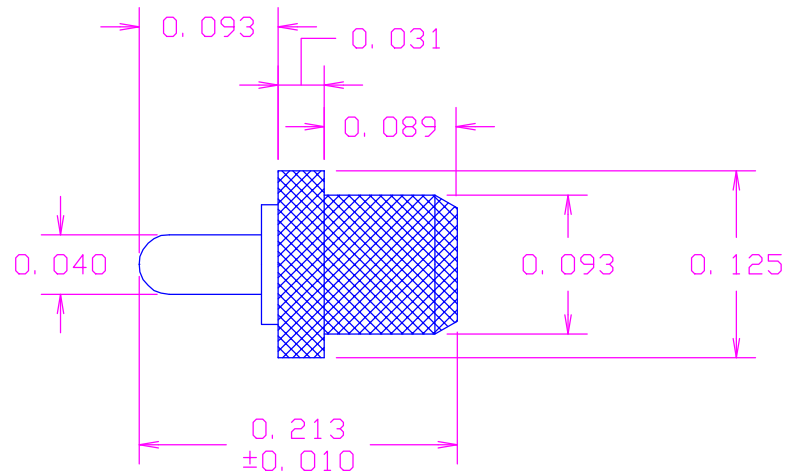

RECOMMENDED HOLE SIZE
FOR PRESS FIT INSERTION


MATERIAL: PIN- BRASS PER ASTM B16,
ALLOY C 36000, 1/2 HARD

BUSHING- PTFE PER ASTM D1710

COLOR(XX)-SEE COLOR CODE

FINISH: PIN- .0003"MIN. ELECTRO-SOLDER

PER MIL-P-81728, OVER .0001"MIN. COPPER

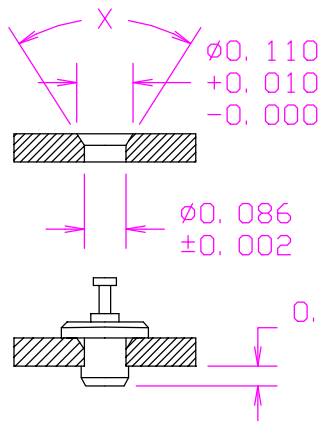

FOR BOARD THICKNESS GREATER THAN .040, X=60°

FOR BOARD THICKNESS LESS THAN .040, X=80°

(XX)COLOR CODE:
10-BLACK
11-BROWN
12-RED
13-ORANGE
14-YELLOW
15-GREEN
16-BLUE
17-VIOLET
18-GRAY
19-WHITE(NATURAL)

ACTUAL SIZE



TOLERANCES (EXCEPT AS NOTED)	CONCORD ELECTRONICS CORPORATION		
DECIMAL $\pm .005$	P/N	SCALE	30 GREAT JONES ST. NEW YORK N. Y. 10012
FRACTIONAL $\pm 1/64$	TITLE TERMINAL		
ANGULAR $\pm 5^\circ$	DATE 9-18-96	DRAWING NUMBER 1100-02-05XX	