


Terminal Strips with Fixing Flanges or Snap-in Mounting Feet, Series 262

Side-entry



CAGE CLAMP®





1
25

	0.08 – 4 mm² 630 V/8 kV/3 ① 24 A AWG 28 – 12 300/600 V, 20/5 A ② 300/600 V, 20/5 A ③ Pole width 7 mm / 0.276 in 9 – 10 mm / 0.37 in * ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭ ⑮ ⑯ ⑰ ⑱ ⑲ ⑳ ㉑ ㉒ ㉓ ㉔ ㉕ ㉖ ㉗ ㉘ ㉙ ㉚ ㉛ ㉜ ㉝ ㉞ ㉟ ㊱ ㊲ ㊳ ㊴ ㊵ ㊶ ㊷ ㊸ ㊹ ㊺ ㊻ ㊼ ㊽ ㊾ ㊿	2 x 0.08 – 4 mm² 630 V/8 kV/3 ① 32 A 2 x AWG 28 – 12 300/600 V, 20/5 A ② 300/600 V, 20/5 A ③ Pole width 12 mm / 0.472 in 9 – 10 mm / 0.37 in * ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭ ⑮ ⑯ ⑰ ⑱ ⑲ ⑳ ㉑ ㉒ ㉓ ㉔ ㉕ ㉖ ㉗ ㉘ ㉙ ㉚ ㉛ ㉜ ㉝ ㉞ ㉟ ㊱ ㊲ ㊳ ㊴ ㊵ ㊶ ㊷ ㊸ ㊹ ㊺ ㊻ ㊼ ㊽ ㊾ ㊿
--	--	---

- ① 630 V = rated voltage
8 kV = rated surge voltage
3 = pollution degree
(see also section 10)
- ② For longer strips and/or assemblies of different colors, please contact factory
- ③ Suitable for EEx i applications with blue insulating housings

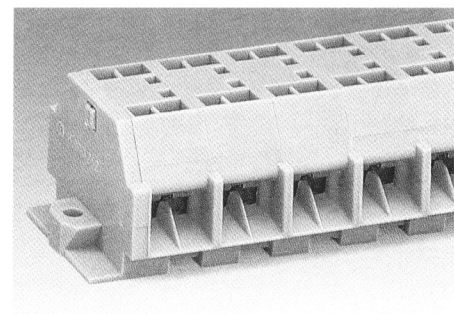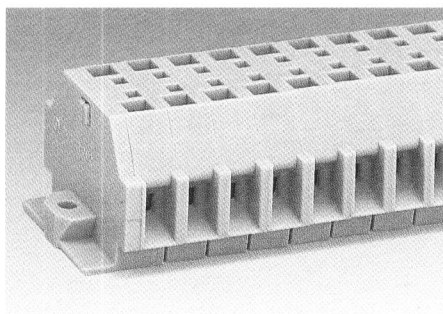

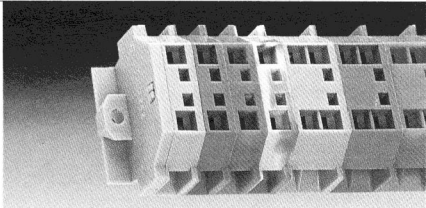
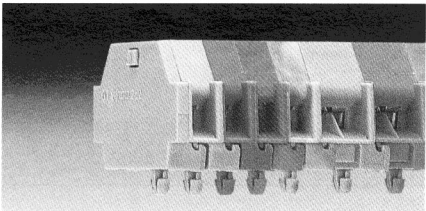
Description	No. of poles	Item-No.	Pack.-unit pcs	No. of poles	Item-No.	Pack.-unit pcs
 Terminal strips with fixing flanges, for screw fixing or similar methods, fixing hole diameter 3.2 mm (with mounting adapter 209-123 also for DIN 35 rail)	2-conductor terminal strips with fixing flanges, grey 2 262-102 100 3 262-103 100 4 262-104 100 5 262-105 100 6 262-106 50 7 262-107 50 8 262-108 50 9 262-109 50 10 262-110 25 11 262-111 25 12 ② 262-112 25			4-conductor terminal strips with fixing flanges, grey 2 262-202 100 3 262-203 100 4 262-204 100 5 262-205 100 6 262-206 50 7 262-207 50 8 262-208 50 9 262-209 50 10 262-210 25 11 262-211 25 12 ② 262-212 25		
 Terminal strips with snap-in mounting feet, for plate thickness 0.6 – 1.2 mm, fixing hole diameter 3.5 mm (fits aluminum rail 210-154 or with mounting adapter 209-120 for DIN 35 rail)	2-cond. terminal strips with snap-in mount. feet, grey 2 262-152 100 3 262-153 100 4 262-154 100 5 262-155 100 6 262-156 50 7 262-157 50 8 262-158 50 9 262-159 50 10 262-160 25 11 262-161 25 12 ② 262-162 25			4-cond. terminal strips with snap-in mount. feet, grey 2 262-252 100 3 262-253 100 4 262-254 100 5 262-255 100 6 262-256 50 7 262-257 50 8 262-258 50 9 262-259 50 10 262-260 25 11 262-261 25 12 ② 262-262 25		

Dimensions for modular terminal blocks and terminal strips (in mm)

Modular terminal blocks and terminal strips with fixing flange

L = No. of poles x pole width
L₁ = L + 8.1 mm
L₂ = L + 14.5 mm

Additional item-Nos. for colored terminal strips blue .../000-006 ①

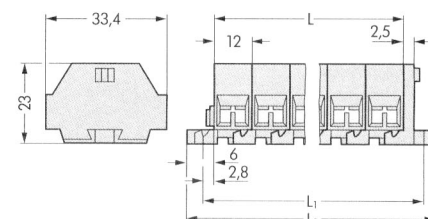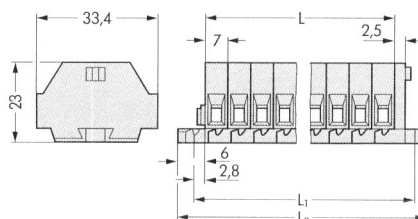

Modular terminal blocks and terminal strips with snap-in mounting feet

③ End terminal block; see page 1.24.

L = (No. of poles x pole width) + 4.4 mm

