


- Series 150 DIL Headers are equipped with 0,64 dia. pins (M-M# 0290). See page 173 for details.
- Series 153 DIL Headers have 3-level wrapposts (M-M# 5301). See page 184 for details.
- Both series have 0,46 diameter solder tails which are pluggable into standard contacts.



Total number of pins				Quantity per tube	Ordering Information		
	A	B	C		Solder Tail	3 Level Wrappost	
10	12,6	5,08	7,6	40	150-XX-210-00-001000	153-XX-210-00-001000	<div style="border: 1px solid black; border-radius: 50%; padding: 10px; text-align: center;"> <p>XX= Plating Code See Below</p> </div>
4	5,0	7,62	10,1	102	150-XX-304-00-001000	153-XX-304-00-001000	
6	7,6	7,62	10,1	67	150-XX-306-00-001000	153-XX-306-00-001000	
8	10,1	7,62	10,1	50	150-XX-308-00-001000	153-XX-308-00-001000	
10	12,6	7,62	10,1	40	150-XX-310-00-001000	153-XX-310-00-001000	
14	17,7	7,62	10,1	29	150-XX-314-00-001000	153-XX-314-00-001000	
16	20,3	7,62	10,1	25	150-XX-316-00-001000	153-XX-316-00-001000	
18	22,8	7,62	10,1	22	150-XX-318-00-001000	153-XX-318-00-001000	
20	25,3	7,62	10,1	20	150-XX-320-00-001000	153-XX-320-00-001000	
22	27,8	7,62	10,1	18	150-XX-322-00-001000	153-XX-322-00-001000	
24	30,4	7,62	10,1	16	150-XX-324-00-001000	153-XX-324-00-001000	
28	35,5	7,62	10,1	14	150-XX-328-00-001000	153-XX-328-00-001000	
20	25,4	10,16	12,7	20	150-XX-420-00-001000	153-XX-420-00-001000	
22	27,8	10,16	12,7	18	150-XX-422-00-001000	153-XX-422-00-001000	
24	30,4	10,16	12,7	16	150-XX-424-00-001000	153-XX-424-00-001000	
28	35,5	10,16	12,7	14	150-XX-428-00-001000	153-XX-428-00-001000	
32	40,6	10,16	12,7	12	150-XX-432-00-001000	153-XX-432-00-001000	
24	30,5	15,24	17,7	16	150-XX-624-00-001000	153-XX-624-00-001000	
28	35,5	15,24	17,7	14	150-XX-628-00-001000	153-XX-628-00-001000	
32	40,6	15,24	17,7	12	150-XX-632-00-001000	153-XX-632-00-001000	
36	45,7	15,24	17,7	11	150-XX-636-00-001000	153-XX-636-00-001000	
40	50,8	15,24	17,7	10	150-XX-640-00-001000	153-XX-640-00-001000	
42	53,3	15,24	17,7	9	150-XX-642-00-001000	153-XX-642-00-001000	
48	60,9	15,24	17,7	8	150-XX-648-00-001000	153-XX-648-00-001000	
50	63,5	15,24	17,7	8	150-XX-650-00-001000	153-XX-650-00-001000	
52	66,0	15,24	17,7	7	150-XX-652-00-001000	153-XX-652-00-001000	
50	63,5	22,86	25,3	8	150-XX-950-00-001000	153-XX-950-00-001000	
52	66,0	22,86	25,3	7	150-XX-952-00-001000	153-XX-952-00-001000	
64	81,2	22,86	25,3	6	150-XX-964-00-001000	153-XX-964-00-001000	

For RoHS compliance, select \diamond plating code. For the gold option (XX=10) also change part number from 15X-XX-XXX-00-001000 to 15X-10-XXX-00-001100

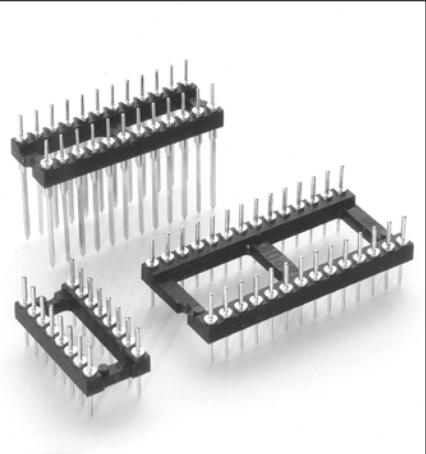

SPECIFY PLATING CODE XX=	10 \diamond	90	40 \diamond	
Pin Plating	0,25 μ m Au	5,08 μ m Sn/Pb	5,08 μ m Sn	