


CTM1 Series

From .022 μH to 1,000 μH

ENGINEERING KIT #1

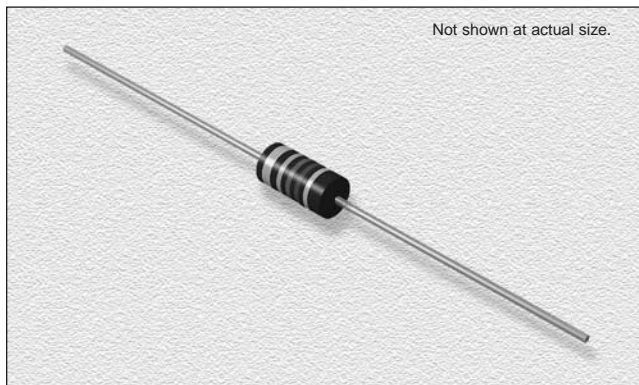


CHARACTERISTICS

- Description:** Axial leaded molded inductor
- Applications:** Used for various kinds of OSC and TRAP coils. Ideal for various RF applications
- Operating Temperature:** -55°C to +105°C
- Inductance Tolerance:** $\pm 5\%$, $\pm 10\%$, $\pm 20\%$
- Testing:** Inductance and Q are tested on an HP4285A or HP4286A at specified frequency
- Packaging:** Bulk pack or Tape & Reel, 5,000 parts per reel
- Marking:** Five band EIA color code indicating inductance code and tolerance
- Material:** Molded epoxy resin over coil
- Core:** Magnetic core (ferrite or iron) except for values 0.022 μH to 1.0 μH (phenolic)
- Additional Information:** Additional electrical & physical information available upon request
- Samples available. See website for ordering information.**

PHYSICAL DIMENSIONS

Size	A Max.	B Max.	C Typ.	24 AWG Nom.
mm	6.35 \pm 0.25	2.41 \pm 0.25	26.7	0.511
inches	0.25 \pm 0.01	0.1 \pm 0.01	1.05	0.02

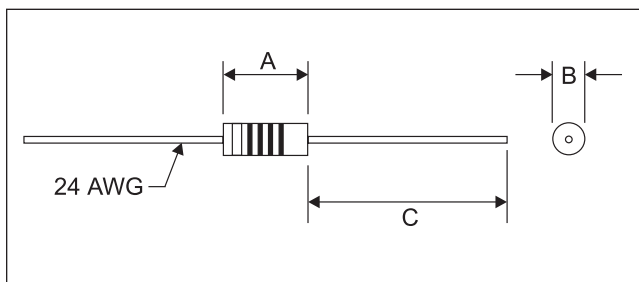

SPECIFICATIONS

Please specify tolerance code when ordering.
CTM1-R027_ ← J = $\pm 5\%$, K = $\pm 10\%$, M = $\pm 20\%$

Part Number	Inductance (μH)	L Test Freq. (MHz)	Q Factor Min.	Q Test Freq. (MHz)	SRF Min. (MHz)	DCR Max. (Ω)	Rated DC (mA)
CTM1-R022M	.022	50	50	50	900	.02	2400
CTM1-R027_	.027	25	40	25	875	.03	2200
CTM1-R033_	.033	25	40	25	850	.03	2000
CTM1-R039_	.039	25	40	25	825	.04	1900
CTM1-R047_	.047	25	40	25	800	.04	1800
CTM1-R056_	.056	25	40	25	775	.05	1700
CTM1-R068_	.068	25	40	25	750	.06	1500
CTM1-R082_	.082	25	40	25	725	.07	1400
CTM1-R10_	.10	25	40	25	680	.08	1350
CTM1-R12_	.12	25	40	25	640	.09	1270
CTM1-R15_	.15	25	38	25	600	.10	1200
CTM1-R18_	.18	25	35	25	550	.12	1105
CTM1-R22_	.22	25	33	25	510	.14	1025
CTM1-R27_	.27	25	33	25	430	.16	960
CTM1-R33_	.33	25	30	25	410	.22	815
CTM1-R39_	.39	25	30	25	365	.30	700
CTM1-R47_	.47	25	30	25	330	.35	650
CTM1-R56_	.56	25	30	25	300	.50	545
CTM1-R68_	.68	25	28	25	275	.60	495
CTM1-R82_	.82	25	28	25	250	.85	415
CTM1-1R0_	1.0	25	25	25	230	1.0	385
CTM1-1R2_	1.2	7.9	25	7.9	150	.18	590
CTM1-1R5_	1.5	7.9	28	7.9	140	.22	535
CTM1-1R8_	1.8	7.9	30	7.9	125	.30	455
CTM1-2R2_	2.2	7.9	30	7.9	115	.40	395
CTM1-2R7_	2.7	7.9	37	7.9	100	.55	355
CTM1-3R3_	3.3	7.9	45	7.9	90	.85	270
CTM1-3R9_	3.9	7.9	45	7.9	80	1.0	250
CTM1-4R7_	4.7	7.9	45	7.9	75	1.2	230
CTM1-5R6_	5.6	7.9	50	7.9	65	1.8	185
CTM1-6R8_	6.8	7.9	50	7.9	60	2.0	175
CTM1-8R2_	8.2	7.9	55	7.9	55	2.7	155
CTM1-100_	10	7.9	55	7.9	50	3.7	130
CTM1-120_	12	2.5	45	2.5	40	2.7	155
CTM1-150_	15	2.5	40	2.5	35	2.8	150
CTM1-180_	18	2.5	50	2.5	30	3.1	145
CTM1-220_	22	2.5	50	2.5	25	3.3	140
CTM1-270_	27	2.5	50	2.5	20	3.5	135
CTM1-330_	33	2.5	45	2.5	24	3.4	130
CTM1-390_	39	2.5	45	2.5	22	3.6	125
CTM1-470_	47	2.5	45	2.5	20	4.5	110
CTM1-560_	56	2.5	45	2.5	18	5.7	100
CTM1-680_	68	2.5	50	2.5	15	6.7	92
CTM1-820_	82	2.5	50	2.5	14	7.3	88
CTM1-101_	100	2.5	50	2.5	13	8.0	84
CTM1-121_	120	.79	30	.79	12	13	66
CTM1-151_	150	.79	30	.79	11	15	61
CTM1-181_	180	.79	30	.79	10	17	57
CTM1-221_	220	.79	30	.79	9.0	21	52
CTM1-271_	270	.79	30	.79	8.0	25	47
CTM1-331_	330	.79	30	.79	7.0	28	45
CTM1-391_	390	.79	30	.79	6.5	35	40
CTM1-471_	470	.79	30	.79	6.0	42	36
CTM1-561_	560	.79	30	.79	5.0	46	35
CTM1-681_	680	.79	30	.79	4.0	60	30
CTM1-821_	820	.79	30	.79	3.8	65	29
CTM1-102_	1000	.79	30	.79	3.4	72	28

12.14.01



Manufacturer of Inductors, Chokes, Coils, Beads, Transformers & Toroids

800-684-5322 Inside US 949-453-1811 Outside US

Copyright © 2003 by CT Magnetics, DBA Central Technologies. All rights reserved.

CT Magnetics reserves the right to make improvements or change specifications without notice