


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

TWIST TIE

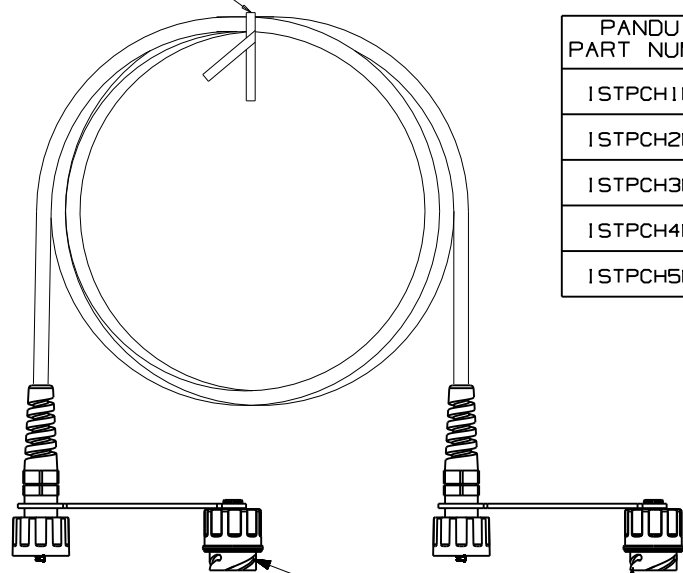

PANDUIT PART NUMBER	MIN. CABLE LENGTH	WEIGHT
ISTPCH1MBLY	1 M	1.82 lbs/10 PCS (825.8 g/10 PCS)
ISTPCH2MBLY	2 M	3.64 lbs/10 PCS (1651.6 g/10 PCS)
ISTPCH3MBLY	3 M	5.46 lbs/10 PCS (2477.5 g/10 PCS)
ISTPCH4MBLY	4 M	7.28 lbs/10 PCS (3303.3 g/10 PCS)
ISTPCH5MBLY	5 M	9.10 lbs/10 PCS (4129.1 g/10 PCS)

NOTES:

- **1. SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AND TO INDICATE COLOR AND OR PACKAGE QUANTITY.
2. SEE CATALOG FOR A COMPLETE LIST OF PARTS APPLICABLE FOR USE WITH THIS PART.
3. DIMENSIONS IN PARENTHESES ARE IN METRIC.
4. CABLE MEETS CATEGORY 5E REQUIREMENTS AND CURRENT ODVA REQUIREMENTS FOR INDUSTRIAL CABLE.
5. ALL MATERIALS AND COMPONENTS USED MUST MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.



T568A WIRING

PLUG CAPS - ON ISTPCH*MBLY PARTS ONLY

PLUG POSITION	CABLE WIRE
1	WHITE GREEN
2	GREEN
3	WHITE ORANGE
4	BLUE
5	WHITE BLUE
6	ORANGE
7	WHITE BROWN
8	BROWN

SIZE

A

DRAWING FILENAME		M02479PH_DC371_00A.PRT
CATEGORY 5E INDUSTRIALNET, SFTP, SOLID, PATCH CORDS WITH PANDUIT PLUG CAPS CUSTOMER DRAWING		
 PANDUIT ^R CORP. TINLEY PARK, IL 60477		I.I. NUMBER
ALL DIMENSIONS ARE GIVEN IN INCHES, UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.X) ± .03(.8) (.XXX) ± .010(.3) (.XX) ± .005 ANGLS ±		PRODUCT SPEC
 THIRD ANGLE PROJECTION		WORK INSTRUCTION
DRAWN BY		SCALE
MDJr		NONE
DATE		PART NO.
4-22-04		ISTPCH*MBLY
CHK'D		DRAWING NO.
		02479-371

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
R	4-11-07	MDJr		RELEASED TO PRODUCTION	02092-03				