


HIGH CURRENT APPLICATION.

FEATURE

- Complementary to KTA1272.

MAXIMUM RATINGS (Ta=25℃)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CBO}	35	V
Collector-Emitter Voltage	V_{CEO}	30	V
Emitter-Base Voltage	V_{EBO}	5	V
Collector Current	I_C	800	mA
Emitter Current	I_B	160	mA
Collector Power Dissipation	P_C	400	mW
Junction Temperature	T_j	150	℃
Storage Temperature Range	T_{stg}	-55~150	℃

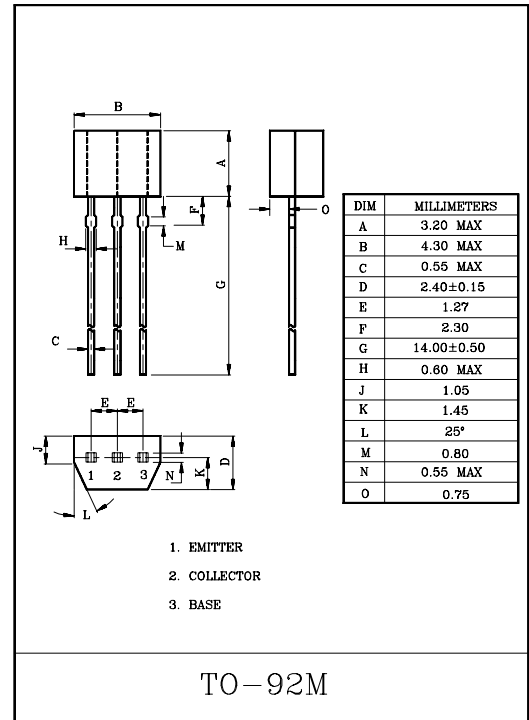

ELECTRICAL CHARACTERISTICS (Ta=25℃)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I_{CBO}	$V_{CB}=30V, I_E=0$	—	—	100	nA
Emitter Cut-off Current	I_{EBO}	$V_{EB}=5V, I_C=0$	—	—	100	nA
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C=10mA$	30	—	—	V
DC Current Gain	$h_{FE(1)}$ (Note)	$V_{CE}=1V, I_C=100mA$	100	—	320	
	$h_{FE(2)}$	$V_{CE}=1V, I_C=700mA$	35	—	—	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=500mA, I_B=20mA$	—	—	0.5	V
Base-Emitter Voltage	V_{BE}	$V_{CE}=1V, I_C=10mA$	0.5	—	0.8	V
Transition Frequency	f_T	$V_{CE}=5V, I_C=10mA$	—	120	—	MHz
Collector Output Capacitance	C_{ob}	$V_{CB}=10V, f=1MHz$	—	13	—	pF

Note : $h_{FE(1)}$ Classification O : 100~200, Y : 160~320