

HCMOS, 7.5x5mm, 1.8V, SMD Oscillator



Model: F4500 SERIES

RoHS Compliant / Pb Free

Rev. 2/25/2008

Page 1 of 2

http://www.foxonline.com/need_a_sample.htm



FEATURES

- 1.8V Operation
- HCMOS Output
- Low Power Consumption
- Standby Function
- Tape and Reel (2,000 pcs. STD)

• PART NUMBER SELECTION Learn More - Internet Required				
Part Number	Model Number	Frequency Stability ¹	Operating Temperature (°C)	Frequency Range (MHz)
528-Frequency-xxxxx	F4500	±100PPM	-10 ~ +70	1.800 ~ 125.000
529-Frequency-xxxxx	F4500R	±100PPM	-40 ~ +85	1.800 ~ 125.000
530-Frequency-xxxxx	F4505	±50PPM	-10 ~ +70	1.800 ~ 125.000
531-Frequency-xxxxx	F4505R	±50PPM	-40 ~ +85	1.800 ~ 125.000
532-Frequency-xxxxx	F4506	±25PPM	-10 ~ +70	1.800 ~ 65.000
533-Frequency-xxxxx	F4506R	±25PPM*	-40 ~ +85	1.800 ~ 50.000
534-Frequency-xxxxx	F4508	±20PPM*	-10 ~ +70	1.800 ~ 50.000

• ELECTRICAL CHARACTERISTICS	
PARAMETERS	MAX (unless otherwise noted)
Frequency Range (Fo)	1.800 ~ 125.000 MHz
Storage Temperature Range (T _{STG})	-55°C ~ +125°C
Supply Voltage (V _{DD})	1.8V ± 5%
Input Current (I _{DD})	
1.000 ~ 32.100 MHz	7mA
32.100+ ~ 70.000 MHz	15mA
Output Symmetry (50% V _{DD})	40% ~ 60%
Rise Time (20% ~ 80% V _{DD}) (T _R)	
1.800 ~ 32.100 MHz	5nS
32.100+ ~ 70.000 MHz	3.5nS
Fall Time (80% ~ 20% V _{DD}) (T _F)	
1.800 ~ 32.100 MHz	5nS
32.100+ ~ 70.000 MHz	3.5nS
Output Voltage (V _{OL})	20% V _{DD}
(V _{OH})	80% V _{DD} Min
Output Current (I _{OL})	2mA Min
(I _{OH})	2mA Min
Output Load (HCMOS)	15pF
Standby Current	10µA
Start-up Time (T _s)	10mS
Output Disable Time ²	300nS
Output Enable Time ²	10mS


¹ Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, aging, shock, and vibration. *Excludes Shock/Vibration

² An internal pullup resistor from pin 1 to pin 4 allows active output if pin 1 is left open.

Note: A 0.01µF bypass capacitor should be placed between V_{DD} (Pin 4) and GND (Pin 2) to minimize power supply line noise.

Drawing is for reference to critical specifications defined by size measurements.

Certain non-critical visual attributes, such as side castellations, reference pin shape, etc. may vary. All specifications subject to change without notice.

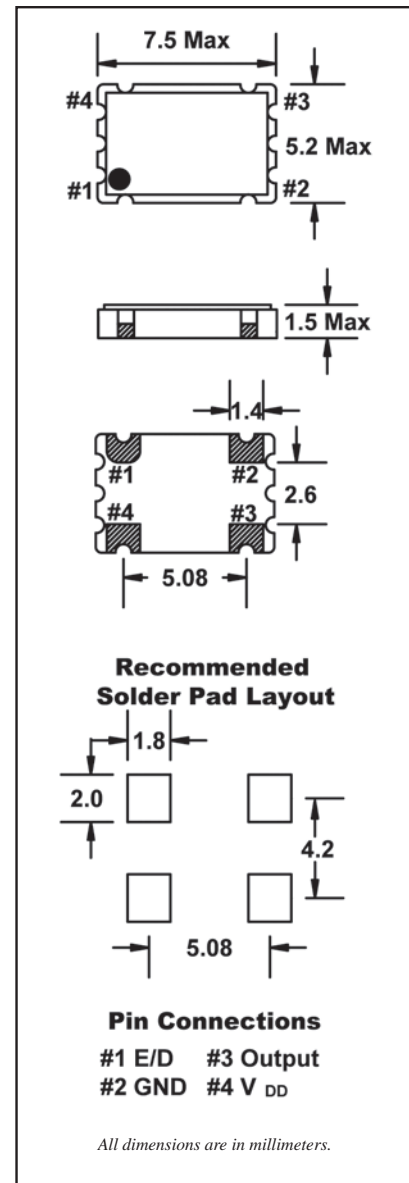

• ENABLE / DISABLE FUNCTION	
INH (Pin 1)	OUTPUT (Pin 3)
OPEN ²	ACTIVE
'1' Level V _{IH} ≥ 70% V _{DD}	ACTIVE
'0' Level V _{IL} ≤ 30% V _{DD}	High Z

HCMOS, 7.5x5mm, 1.8V, SMD Oscillator



Model: F4500 SERIES

RoHS Compliant / Pb Free

Rev. 2/25/2008

Page 2 of 2

http://www.foxonline.com/need_a_sample.htm

Need a
Sample®

• TAPE SPECIFICATIONS (millimeters)

MODEL	A	B	C	D	E	F	STD Reel QTY
F4500 Series	∅1.5	4.0	8.0	7.5	16.0	2.15	2,000

• REEL SPECIFICATIONS (millimeters)

MODEL	G	H	I	J	K	L	M
F4500 Series	2.0	∅13	∅21	∅80	∅255	17.5	2.0

