

N - CHANNEL ENHANCEMENT MODE
 POWER MOS TRANSISTOR


PRELIMINARY DATA

TYPE	V _{DSS}	R _{D(on)}	I _D
STP2NA50	500 V	<4 Ω	2.8 A
STP2NA50FI	500 V	< 4 Ω	2A


- TYPICAL R_{D(on)} = 3.25 Ω
- ± 30V GATE TO SOURCE VOLTAGE RATING
- 100% AVALANCHE TESTED
- REPETITIVE AVALANCHE DATA AT 100°C
- LOW INTRINSIC CAPACITANCES
- GATE CHARGE MINIMIZED
- REDUCED THRESHOLD VOLTAGE SPREAD

APPLICATIONS

- MEDIUM CURRENT, HIGH SPEED SWITCHING
- SWITCH MODE POWER SUPPLIES (SMPS)
- CONSUMER AND INDUSTRIAL LIGHTING

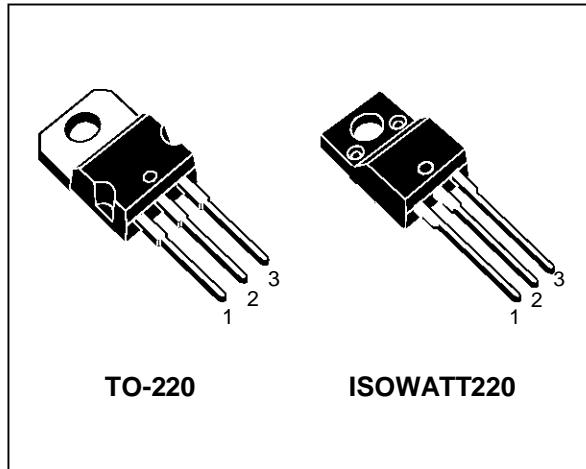

INTERNAL SCHEMATIC DIAGRAM



SC06140

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value		Unit
		STP2NA50	STP2NA50FI	
V _{DS}	Drain-Source Voltage (V _{gs} = 0)	500		V
V _{DGR}	Drain-Gate Voltage (R _{gs} = 20 kΩ)	500		V
V _{GS}	Gate-Source Voltage	± 30		V
I _D	Drain-Current (continuous) at T _c = 25°C	.8	2	A
I _D	Drain-Current (continuous) at T _c = 100°C	.8	1.25	A
I _{DM(•)}	Drain-Current (Pulsed)	11.2	11.2	A
P _{tot}	Total Dissipation at T _c = 25°C	5	35	W
	Derating Factor	0.6	0.28	W/°C
V _{ISO}	Insulation Withstand Voltage (DC)	-	4000	V
T _{stg}	Storage Temperature	-65 to 150		°C
T _j	Max Operating Junction Temperature	150		°C

(•)Pulse width limited by safe operating area

STP2NA50/FI

THERMAL DATA

			TO220	ISOWATT220	
R _{thj-case}	Thermal Resistance Junction-case	Max	1.67	3.57	°C/W
R _{thj-amb} R _{thc-sink} T _L	Thermal Resistance Junction-ambient Thermal Resistance Case-sink Maximum Lead Temperature For Soldering Purpose	Max Typ	62.5 0.5 300	0.5 300	°C/W °C/W °C

AVALANCHE CHARACTERISTICS

Symbol	Parameter	Max Value	Unit
I _{AR}	Avalanche Current, Repetitive or Not-Repetitive (pulse width limited by T _j max, δ < 1 %)	2.8	A
E _{AS}	Single Pulse Avalanche Energy (starting T _j = 25 °C, I _D = I _{AR} , V _{DD} = 50 V)	42	mJ
E _{AR}	Repetitive Avalanche Energy (pulse width limited by T _j max, δ < 1 %)	1.6	mJ
I _{AR}	Avalanche Current, Repetitive or Not-Repetitive (T _c = 100 °C, pulse width limited by T _j max, δ < 1 %)	1.8	A

ELECTRICAL CHARACTERISTICS (T_{case} = 25 °C unless otherwise specified)

OFF

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V _{(BR)DSS}	Drain-source Breakdown Voltage	I _D = 250 μA V _{GS} = 0	500			V
I _{DSS}	Zero Gate Voltage Drain Current (V _{GS} = 0)	V _{DS} = Max Rating V _{DS} = Max Rating x 0.8 T _c = 125 °C			250 1000	μA μA
I _{GSS}	Gate-Source Leakage Current (V _{DS} = 0)	V _{GS} = ± 30 V			100	mA

ON (*)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V _{GS(th)}	Gate Threshold Voltage	V _{DS} = V _{GS} I _D = 250 μA	.25	3	3.75	V
R _{D(on)}	Static Drain-source On Resistance	V _{GS} = 10 V I _D = 1.4 A V _{GS} = 10 V I _D = 1.4 A T _c = 100 °C		3.25	4 8	Ω Ω
I _{D(on)}	On State Drain Current	V _{DS} > I _{D(on)} x R _{DS(on) max} V _{GS} = 10 V	2.8			A

DYNAMIC

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
g _{fs} (*)F	Forward Transconductance	V _{DS} > I _{D(on)} x R _{DS(on) max} I _D = 1.4 A	0.8	2		S
C _{iss} C _{oss} C _{rss}	Input Capacitance Output Capacitance Reverse Transfer Capacitance	V _{DS} = 25V f = 1M Hz V _{GS} = 0		300 55 15	400 70 20	pF pF pF

ELECTRICAL CHARACTERISTICS (continued)

SWITCHING ON

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$t_{d(on)}$ t_r	Turn-on Time Rise Time	$V_{DD} = 2.50 \text{ V}$ $I_D = 1.4 \text{ A}$ $R_G = 4.7 \Omega$ $V_{GS} = 1.0 \text{ V}$		7 8	10 11	ns ns
$(di/dt)_{on}$	Turn-on Current Slope	$V_{DD} = 4.00 \text{ V}$ $I_D = 2.8 \text{ A}$ $R_G = 4.7 \Omega$ $V_{GS} = 1.0 \text{ V}$		350		A/ μs
Q_g Q_{gs} Q_{gd}	Total Gate Charge Gate-Source Charge Gate-Drain Charge	$V_{DD} = 4.00 \text{ V}$ $I_D = 2.8 \text{ A}$ $V_{GS} = 1.0 \text{ V}$		18 5.5 7	25	nC nC nC

SWITCHING OFF

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$t_{r(V_{off})}$ t_f t_c	Off-voltage Rise Time Fall Time Cross-over Time	$V_{DD} = 4.00 \text{ V}$ $I_D = 2.8 \text{ A}$ $R_G = 4.7 \Omega$ $V_{GS} = 1.0 \text{ V}$		7 7 14	10 10 20	ns ns ns

SOURCE DRAIN DIODE


Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I_{SD} $I_{SDM}(\bullet)$	Source-drain Current Source-drain Current (pulsed)				2.8 11.2	A A
$V_{SD} (\ast)F$	Forward On Voltage	$I_{SD} = 2.8 \text{ A}$ $V_{GS} = 0$			1.6	V
t_{rr} Q_{rr} I_{RRM}	Reverse Recovery Time Reverse Recovery Charge Reverse Recovery Current	$I_{SD} = 2.8 \text{ A}$ $di/dt = 1.00 \text{ A}/\mu\text{s}$ $V_{DD} = 1.00 \text{ V}$ $T_j = 1.50^\circ\text{C}$		380 4.4 23		ns μC A

(*) Pulsed: Pulse duration = 300 μs , duty cycle 1.5 %

(\bullet) Pulse width limited by safe operating area


TO-220 MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	4.40		4.60	0.173		0.181
C	1.23		1.32	0.048		0.051
D	2.40		2.72	0.094		0.107
D1		1.27			0.050	
E	0.49		0.70	0.019		0.027
F	0.61		0.88	0.024		0.034
F1	1.14		1.70	0.044		0.067
F2	1.14		1.70	0.044		0.067
G	4.95		5.15	0.194		0.203
G1	2.4		2.7	0.094		0.106
H2	10.0		10.40	0.393		0.409
L2		16.4			0.645	
L4	13.0		14.0	0.511		0.551
L5	2.65		2.95	0.104		0.116
L6	15.25		15.75	0.600		0.620
L7	6.2		6.6	0.244		0.260
L9	3.5		3.93	0.137		0.154
DIA.	3.75		3.85	0.147		0.151

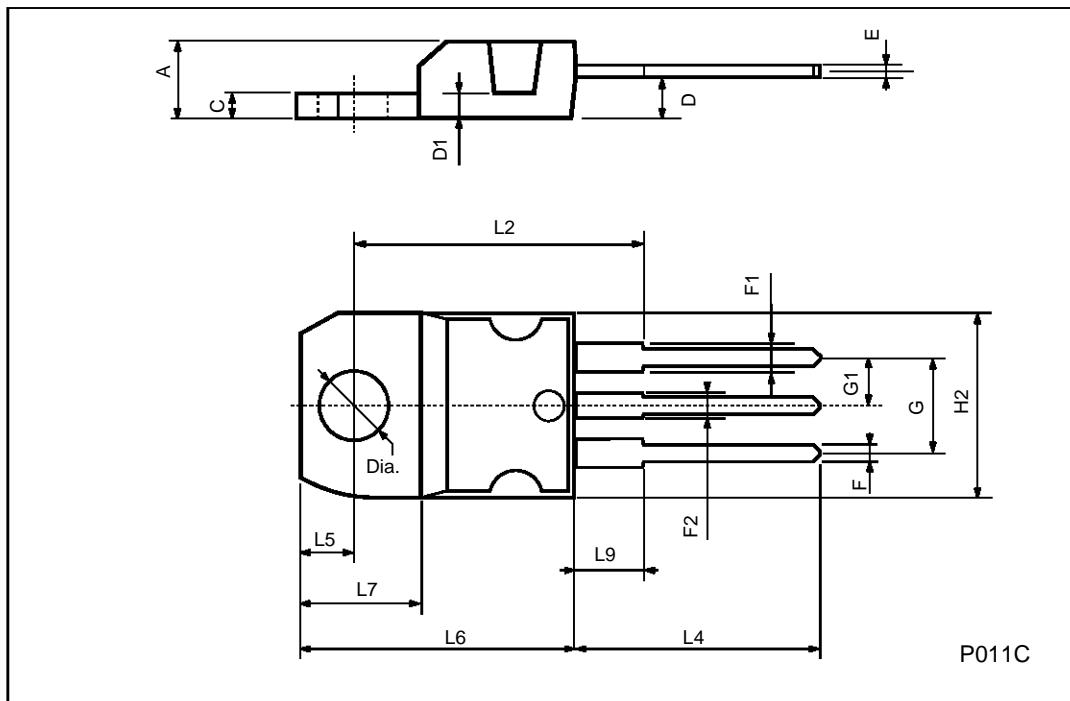

ISOWATT220 MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	4.4		4.6	0.173		0.181
B	2.5		2.7	0.098		0.106
D	2.5		2.75	0.098		0.108
E	0.4		0.7	0.015		0.027
F	0.75		1	0.030		0.039
F1	1.15		1.7	0.045		0.067
F2	1.15		1.7	0.045		0.067
G	4.95		5.2	0.195		0.204
G1	2.4		2.7	0.094		0.106
H	10		10.4	0.393		0.409
L2		16			0.630	
L3	28.6		30.6	1.126		1.204
L4	9.8		10.6	0.385		0.417
L6	15.9		16.4	0.626		0.645
L7	9		9.3	0.354		0.366
Ø	3		3.2	0.118		0.126

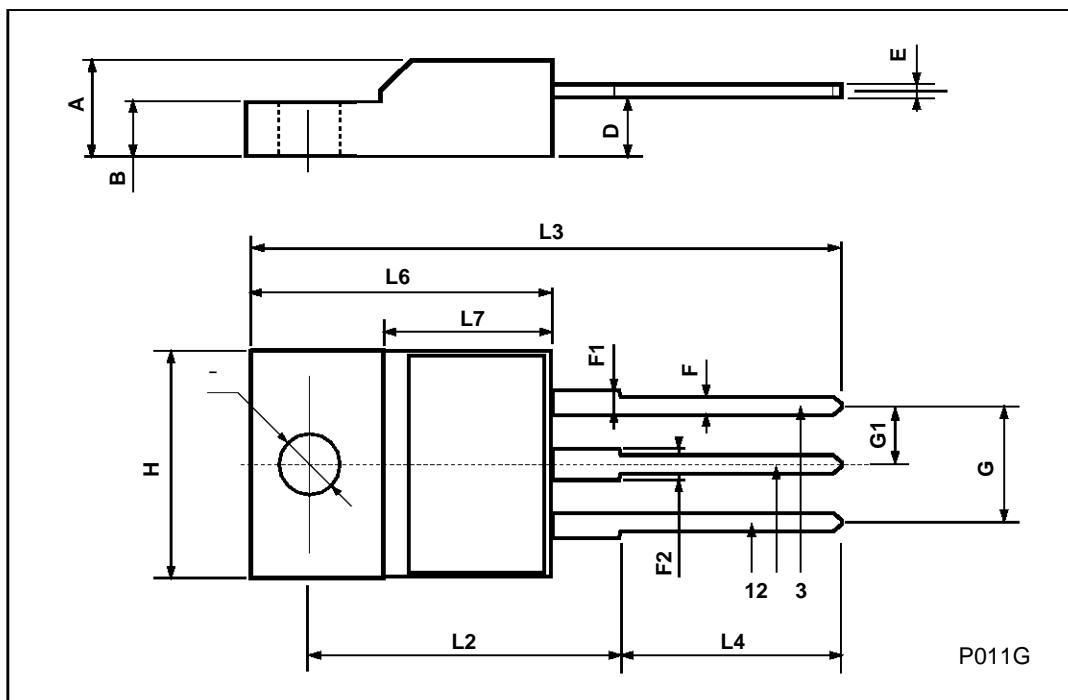

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1995 SGS-THOMSON Microelectronics - All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES

Australia - Brazil - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands -
Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A

..