
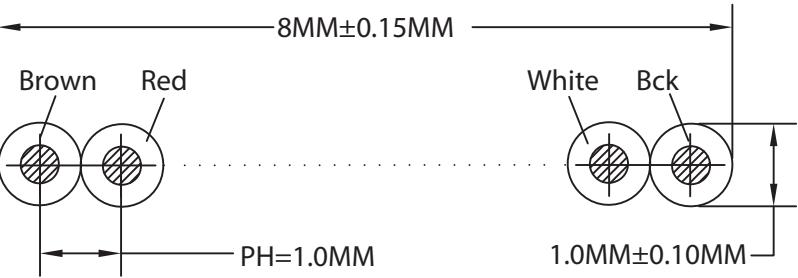


A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

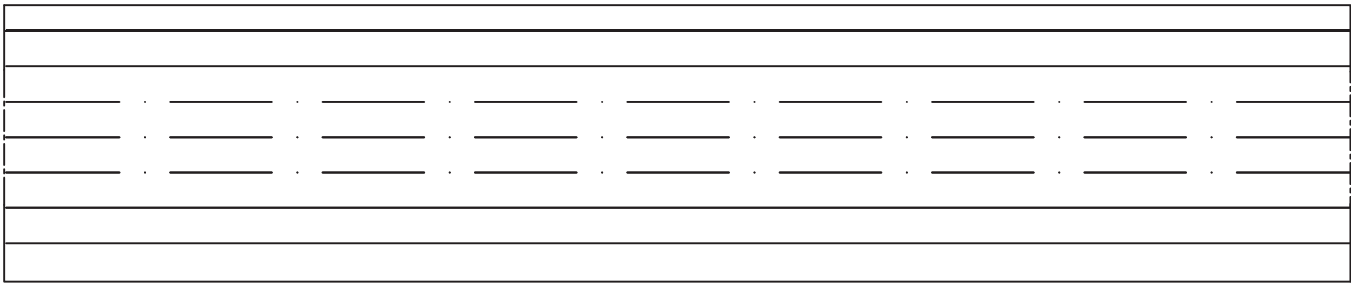

Conductor:

- Style/Size: UL2651 28AWG NPIN
- Material: TC
- Construction: 7/Φ0.125±0.008MM

Jacket:


- Min. Avg. Thick: 0.26MM
- Min. Thick.: 0.18MM
- Material: 35Pa UL-PVC (All the raw material meet VEGA GP standards)
- Color: NP(Brown, Red, Pink, Yellow, Green, Blue, Purple, Grey, White, Black...
... Brown Red, Pink, Yellow, Green, Blue, Purple, Grey, White, Black)
- OD: 1.0MM±0.10MM*50.0MM±0.15MM

Electrical:

- Conductor Resistance: Max. 237.25Ω/Km, 20°C
- Insulation Resistance: Min. 20MΩ/Km, 20°C
- Dielectric Strength: 1,500V AC 1min.
- UL File No. E189529
- UL Style: 2651-VW-1

Unit: MM±0.15MM



Scale	1:1							Name
TOLERANCE						Drawn	10.28.11	Chappell
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
		Modification	Date	Name				

Item No.		AWG28-08/F-1/300-R
Title Multi-Color Ribbon Cable - 28AWG, 1.0MM Pitch, 8 Conductors, 300 Feet, 13" Reel		
Drawing No.		rev00
Replace		