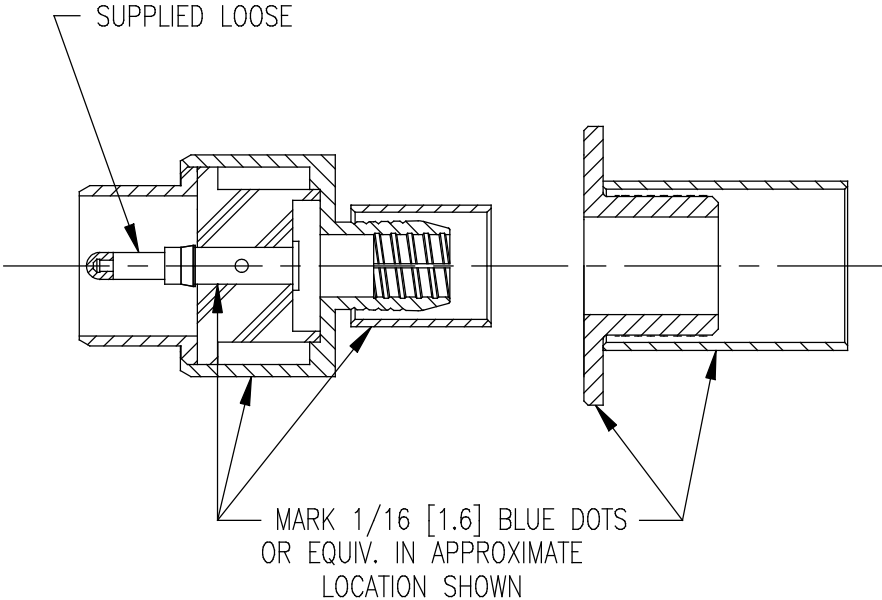


DASH NO.	M CODE	MADE FROM	GSD		785873	
			REVISIONS			
			ISSUE	CHANGES		
			0	ER 39842 HVN 03/15/07		
			785873 SD			
NOTES:			SCALE			
1. FOR USE WITH 730 CABLE GROUP (BELDEN 9267, 1856A, 1857A).			APPROX SURFACE AREA			
2. FOR CABLING INSTRUCTIONS SEE 3-651 (CONVENTIONAL METHOD) OR 3-711 (PRE-PREPARED DIMENSIONS).			USED ON			
3. USE CRIMPING TOOL KTH-8000 AND DIE KTH-8001.			REF:			
4. MATERIALS:			RETRO-FIT ASSY			
INSULATORS: TEFLON, ASTM-D-4894			DRAWN		HVN	DATE 03/15/07
K-GRIP SLEEVES: COM BRONZE, ASTM-B140			DESIGN		HVN	DATE 03/15/07
CENTER CONTACT TIP: DELRIN			APPR.		DATE	
ALL OTHER METAL PARTS: BRASS, ASTM-B16			 ROCK HILL, SOUTH CAROLINA 29730			
5. FINISHES:						
CENTER AND OUTER CONTACT: HARD GOLD PLATE, PER ASTM-B488			785873			
ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT NICKEL FINISH (TR-5)						
6. ELECTRICAL CHARACTERISTICS:						
NOMINAL IMPEDANCE: 75 OHMS						
FREQUENCY RANGE: DC-3.0 GHz						
GSD						