

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/5/10	

6

5

4






3

2

1

APPROVED: _____

DATE: _____ TITLE: _____

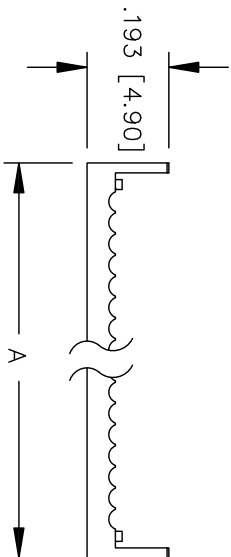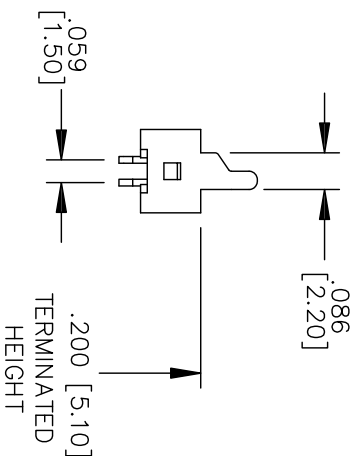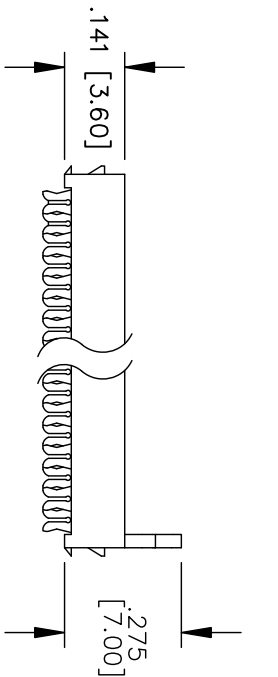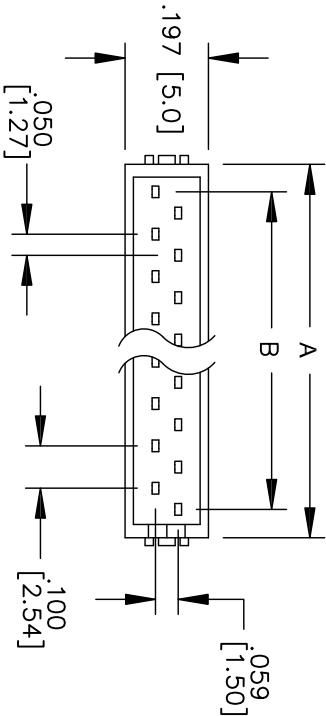

SPECIFICATIONS:

Material:

Insulator: PBT, rated UL 94V-0

Insulator color: Red

Contacts: Phosphor Bronze

Plating:

Gold flash over Nickel underplate overall

Electrical:

Voltage rating: 30V AC/DC

Current rating: 1A AC/DC

Contact resistance: 20 mohms max.

Insulation resistance: 1,000 Mohms min.

Dielectric withstanding: 500V AC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant

A = .050 [1.27] X # of positions + .120 [3.05]
B = .050 [1.27] X # of spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED			
INCHES	HOLES	ØXX	±.10
.X ±.10	ØXX	±.10	
.XX ±.020	ØXX	±.015	
.XXX ±.015	ØXXX	±.010	

TITLE
ON WIRE TYPE, GOLD FLASH

ADAM TECH

909 Railway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

APPROVALS		DATE	
DRAWN	AY	11/5/10	
CHECKED	VW	11/5/10	
APPROVED			



6

5

4

3

2

1