

## Advanced STB processor with integrated DVB-C/DVB-T/DVB-T2 demodulator


Data brief

### Features

- Integrated DVB-C, DVB-T and DVB-T2 demodulator and FEC
- ST40 applications CPU with 256 Kbyte L2 cache
  - 650 MHz delivering 1200 DMIPs
- 16-bit LMI supporting DDR3
  - Up to 667 MHz (DDR3 1333)
- Latest generation Delta decoder with ST231 core:
  - Decoding of H.264, MPEG2, VC-1 and AVS HD or SD video streams
- 3DTV decoding and display, compatible with HDMI 1.4b
- Extensive connectivity:
  - Two USB 2.0 ports
  - Ethernet MII/RMII/TMII port
  - SD/eMMC card port
  - Gen II (3 Gbit/s) eSATA port
  - PCI-e port
- Secure boot from SLC NAND Flash or Serial NOR Flash
- Low-power process and architecture
- Integrated low power standby controller
- High-quality video resizing and de-interlacing
- Targets two-layer PCBs for cost-effective zapper and STB applications
- Integrated 10/100 Ethernet MAC and PHY
- 2D graphics blitter
- Advanced security
- Package: PBGA 27 x 27 mm<sup>2</sup>

### Description

The STiH253 uses the latest process technology to provide a cost-effective, feature rich, highly integrated SoC for set-top boxes (STBs). It is targeted at the advanced decoding STB market across cable, terrestrial and IP/hybrid networks, and is suitable for operator markets (with advanced security) and retail markets worldwide.

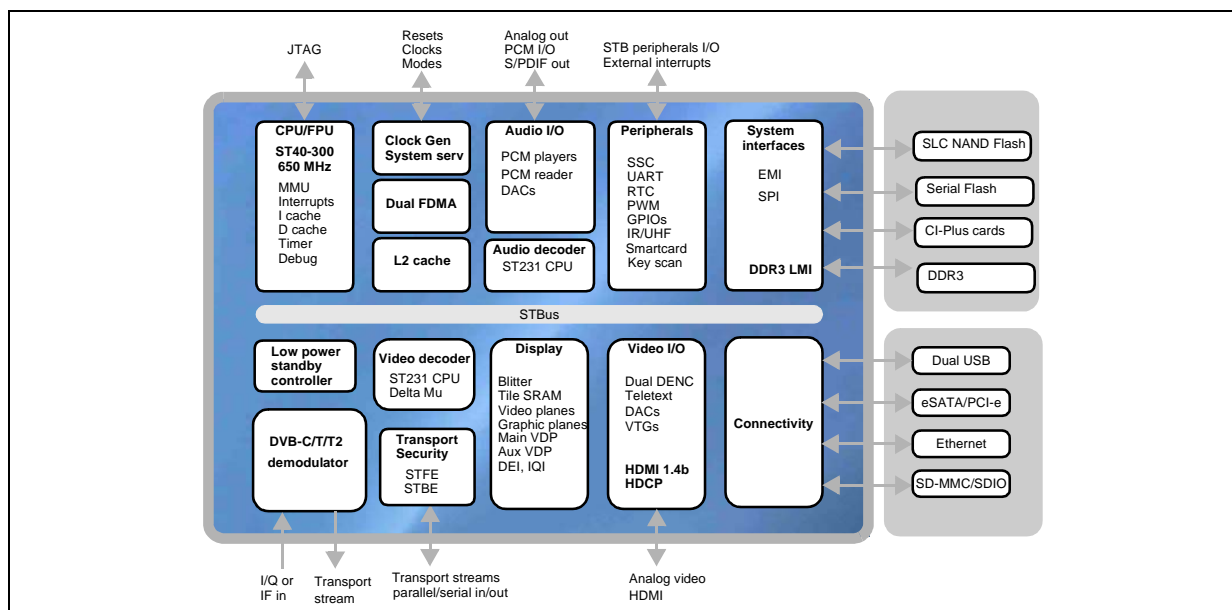

# Overview

The STiH253 offers current users of ST's growing family of advanced decoding ICs enhancements in performance and features, enabling operators to offer consumers new multimedia-rich services and viewing experiences, including new 3DTV features. Faster DDR3 memory is also supported, and the applications CPU benefits from an L2 cache. The STiH253 keeps pace with the latest advanced security requirements of the main CA vendors, and an integrated standby controller enables the STiH253 to target stringent low power regulations.

Features	Benefits
Integrated DVB-C, DVB-T and DVB-T2 demodulation and FECs.	Highly-integrated STB solution, reducing component count and manufacturing BOM.
ST40 applications CPU, with 32KI and 32KD L1 caches and 256K L2 cache.	High-performance processing for applications and middleware.
Integrated low power standby controller within its own power island.	Secure hibernation to, and fast resume from, very low power passive standby mode, targeting STB standby power < 0.5 W.
Latest generation of ST's Delta video decoder coupled with a high-quality video display pipeline (HQVDP).	Decoding of advanced high definition standards (MPEG2, H264, VC-1, AVS) plus the performance and flexibility for web-based content decoding such as Flash <sup>®</sup> , DivX <sup>™</sup> , MJPEG and Real <sup>®</sup> , without impacting applications CPU performance.
Dual USB 2.0 hosts, eSATA, Ethernet MAC with MII/RMII/TMII interfaces, PCI-e, SD-MMC/SDIO interface.	Extensive high-speed connectivity for the widest range of STB peripherals, such as Flash drives, external HDDs, Ethernet, home network controllers (such as MoCA <sup>®</sup> , Wi-Fi), DOCSIS <sup>®</sup> modem and memory cards.
NOCS3.0, NSK2.0 and DVB-CSA3 ready.	Fully compliant with the latest advanced security requirements of CA vendors.
Ball compatible with other STiH2xx family variants.	Single platform versatility across all networks (satellite, cable, terrestrial, IP).

## Revision history

**Table 1. Document revision history**

Date	Revision	Changes
11-Dec-2012	1	Initial release.
06-Jun-2013	2	Minor updates.

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**ST PRODUCTS ARE NOT AUTHORIZED FOR USE IN WEAPONS. NOR ARE ST PRODUCTS DESIGNED OR AUTHORIZED FOR USE IN: (A) SAFETY CRITICAL APPLICATIONS SUCH AS LIFE SUPPORTING, ACTIVE IMPLANTED DEVICES OR SYSTEMS WITH PRODUCT FUNCTIONAL SAFETY REQUIREMENTS; (B) AERONAUTIC APPLICATIONS; (C) AUTOMOTIVE APPLICATIONS OR ENVIRONMENTS, AND/OR (D) AEROSPACE APPLICATIONS OR ENVIRONMENTS. WHERE ST PRODUCTS ARE NOT DESIGNED FOR SUCH USE, THE PURCHASER SHALL USE PRODUCTS AT PURCHASER'S SOLE RISK, EVEN IF ST HAS BEEN INFORMED IN WRITING OF SUCH USAGE, UNLESS A PRODUCT IS EXPRESSLY DESIGNATED BY ST AS BEING INTENDED FOR "AUTOMOTIVE, AUTOMOTIVE SAFETY OR MEDICAL" INDUSTRY DOMAINS ACCORDING TO ST PRODUCT DESIGN SPECIFICATIONS. PRODUCTS FORMALLY ESCC, QML OR JAN QUALIFIED ARE DEEMED SUITABLE FOR USE IN AEROSPACE BY THE CORRESPONDING GOVERNMENTAL AGENCY.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2013 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)