

# High Power Broadband Noise Sources

## NMA2511-1T

### 10 MHz to 1500 MHz



## Specifications

RF Frequency	10 MHz to 1500 MHz
Noise Output	82.2 dB Min ENR
Noise Spectral Density ( $N_o$ )	-91.8 dBm/Hz Min
Noise Power (N)	0 dBm
Flatness	2 dB P-P Max
Peak Factor	5:1
Bias Voltage	5 and 12 V
Supply Current	5.0 +/- .1 v @ 300 mA Max 11.8 - 18v @ 25 mA Max
Impedance	50 ohms

## Package and Connectivity


Construction	Coaxial
Package Type	T Package
Connector Type	SMA(F)

## Environmental

Operating Temperature	-30 to 85 °C
Storage Temperature	-65 to 95 °C

## Notes

No TTL Control

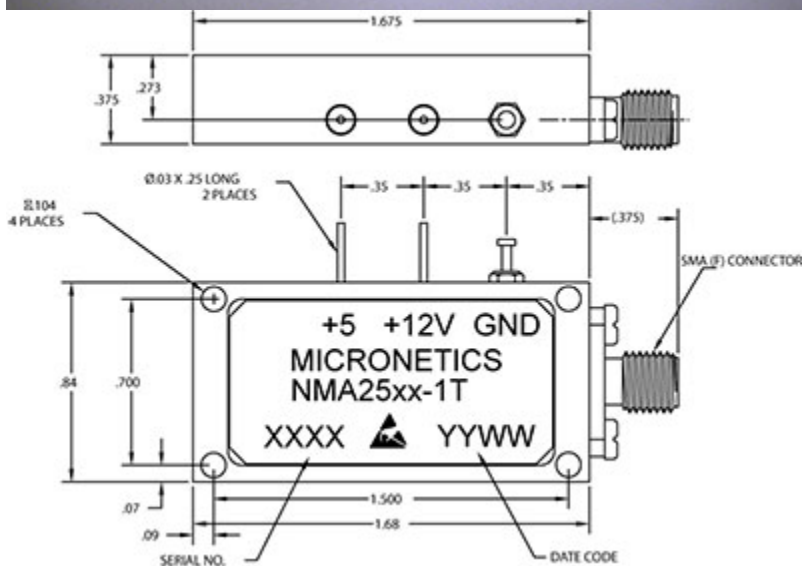

Specifications subject to change without notice

Micronetics, Inc. | Hudson, NH | Tel: 1-603-883-2900 | [www.Micronetics.com](http://www.Micronetics.com)

# MICRONETICS

