
4AM11

Silicon N-Channel/P-Channel Power MOS FET Array

HITACHI

ADE-208-1209 (Z)

1st. Edition

Mar. 2001


Application

High speed power switching

Features

- Low on-resistance
N-channel: $R_{DS(on)} \leq 0.17$, $V_{GS} = 10$ V, $I_D = 2.5$ A
P-channel: $R_{DS(on)} \leq 0.2$, $V_{GS} = -10$ V, $I_D = -2.5$ A
- Capable of 4 V gate drive
- Low drive current
- High speed switching
- High density mounting
- Suitable for H-bridged motor driver

Outline

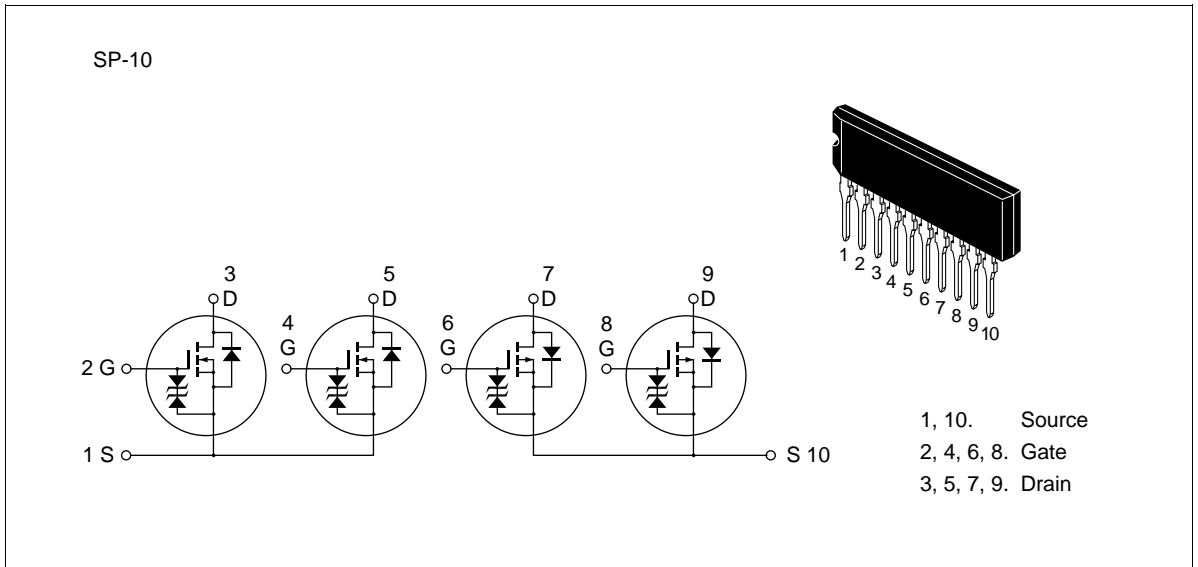

Absolute Maximum Ratings (Ta = 25°C) (1 Unit)

Item	Symbol	Rating		
		Nch	Pch	Unit
Drain to source voltage	V_{DSS}	60	-60	V
Gate to source voltage	V_{GSS}	±20	±20	V
Drain current	I_D	5	-5	A
Drain peak current	$I_{D(pulse)}^{*1}$	20	-20	A
Body to drain diode reverse drain current	I_{DR}	5	-5	A
Channel dissipation	$Pch (Tc = 25°C)^{*2}$	28		W
Channel dissipation	Pch^{*2}	4		W
Channel temperature	Tch	150		°C
Storage temperature	Tstg	-55 to +150		°C

Notes: 1. $PW \leq 10 \mu s$, duty cycle $\leq 1\%$





2. 4 Devices operation





Electrical Characteristics (Ta = 25°C) (1 Unit)

Item	Symbol	N channel			P channel			Unit	Test conditions
		Min	Typ	Max	Min	Typ	Max		
Drain to source breakdown voltage	$V_{(BR)DSS}$	60	—	—	-60	—	—	V	$I_D = 10 \text{ mA}, V_{GS} = 0$
Gate to source breakdown voltage	$V_{(BR)GSS}$	± 20	—	—	± 20	—	—	V	$I_G = \pm 100 \text{ }\mu\text{A}, V_{DS} = 0$
Gate to source leak current	I_{GSS}	—	—	± 10	—	—	± 10	μA	$V_{GS} = \pm 16 \text{ V}, V_{DS} = 0$
Zero gate voltage drain current	I_{DSS}	—	—	250	—	—	-250	μA	$V_{DS} = 50 \text{ V}, V_{GS} = 0$
Gate to source cutoff voltage	$V_{GS(off)}$	1.0	—	2.0	-1.0	—	-2.0	V	$I_D = 1 \text{ mA}, V_{DS} = 10 \text{ V}$
Static drain to source on state resistance	$R_{DS(on)}$	—	0.13	0.17	—	0.15	0.2	Ω	$I_D = 2.5 \text{ A}, V_{GS} = 10 \text{ V}^{*1}$
		—	0.18	0.24	—	0.20	0.27	Ω	$I_D = 2.5 \text{ A}, V_{GS} = 4 \text{ V}^{*1}$
Forward transfer admittance	$ y_{fs} $	2.7	4.5	—	2.7	5.0	—	S	$I_D = 2.5 \text{ A}, V_{DS} = 10 \text{ V}^{*1}$
Input capacitance	C_{iss}	—	400	—	—	900	—	pF	$V_{DS} = 10 \text{ V}, V_{GS} = 0,$
Output capacitance	C_{oss}	—	220	—	—	460	—	pF	$f = 1 \text{ MHz}$
Reverse transfer capacitance	C_{rss}	—	60	—	—	130	—	pF	
Turn-on delay time	$t_{d(on)}$	—	5	—	—	8	—	ns	$I_D = 2.5 \text{ A}, V_{GS} = 10 \text{ V},$
Rise time	t_r	—	30	—	—	35	—	ns	$R_L = 12 \text{ }\Omega$
Turn-off delay time	$t_{d(off)}$	—	170	—	—	180	—	ns	
Fall time	t_f	—	75	—	—	85	—	ns	
Body to drain diode forward voltage	V_{DF}	—	1.0	—	—	-1.0	—	V	$I_F = 5 \text{ A}, V_{GS} = 0$
Body to drain diode reverse recovery time	t_{rr}	—	100	—	—	170	—	μs	$I_F = 5 \text{ A}, V_{GS} = 0,$ $dI_F/dt = 50 \text{ A}/\mu\text{s}$


Note: 1. Pulse Test

Polarity of test conditions for P channel device is reversed.

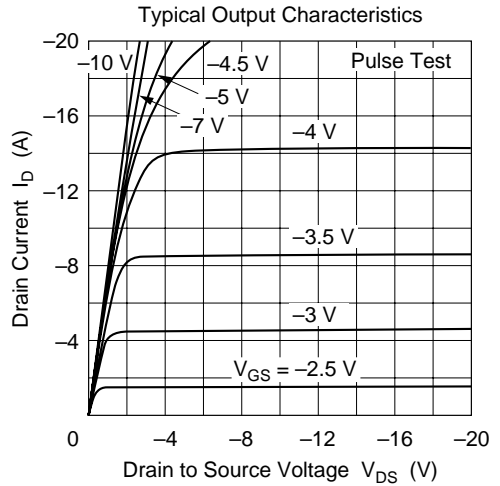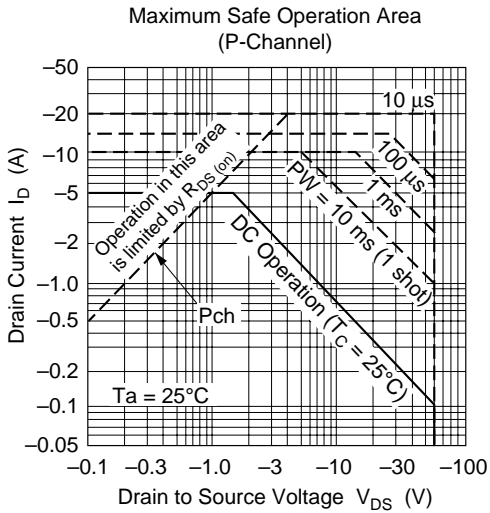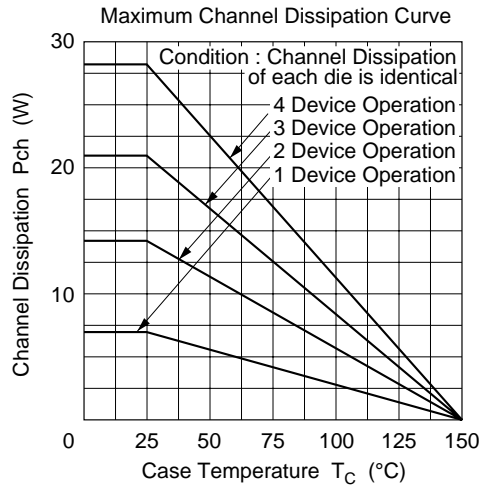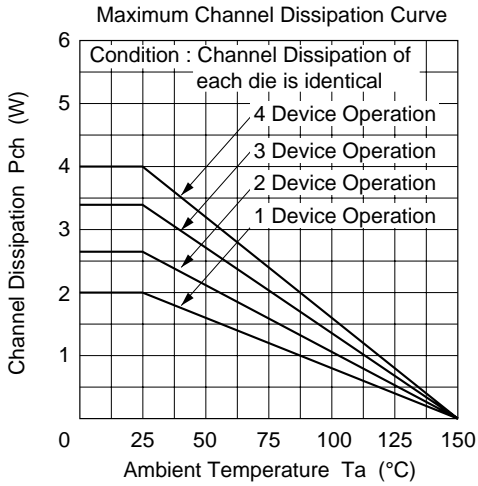


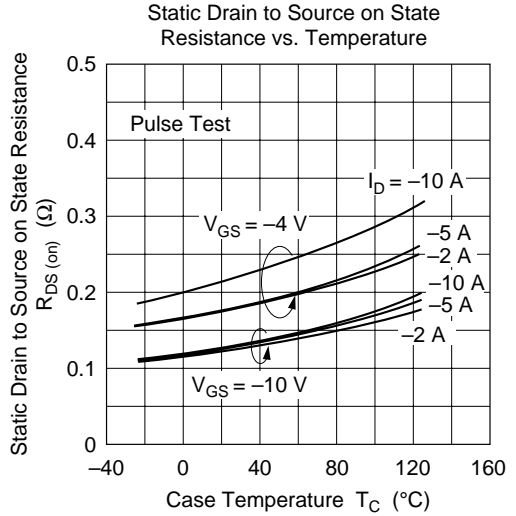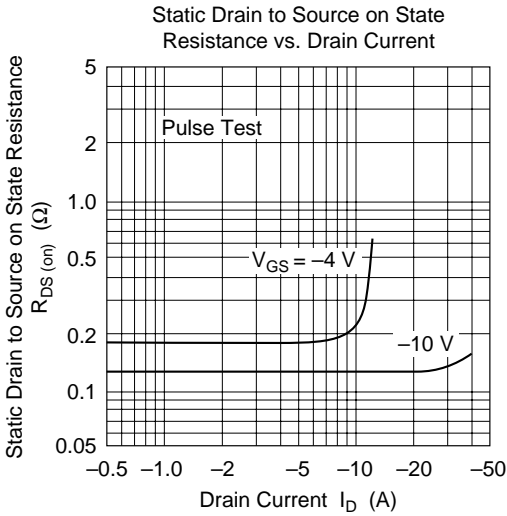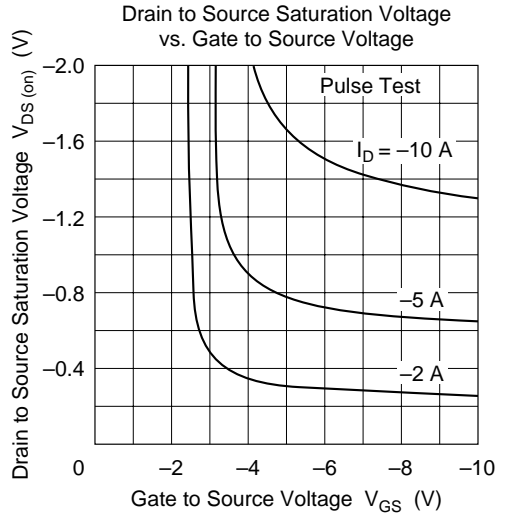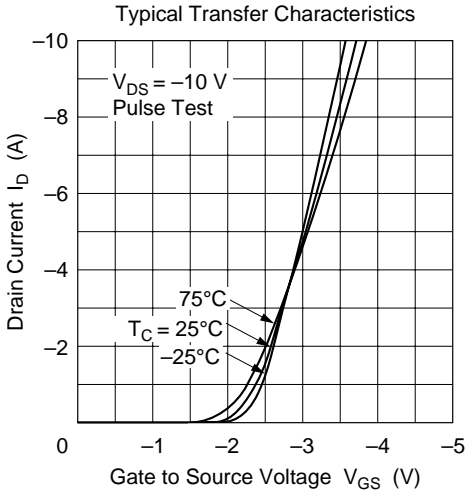


Forward Transfer Admittance vs. Drain Current

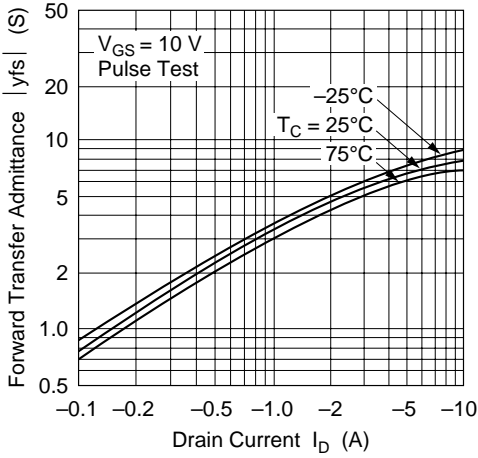


Body to Drain Diode Reverse Recovery Time


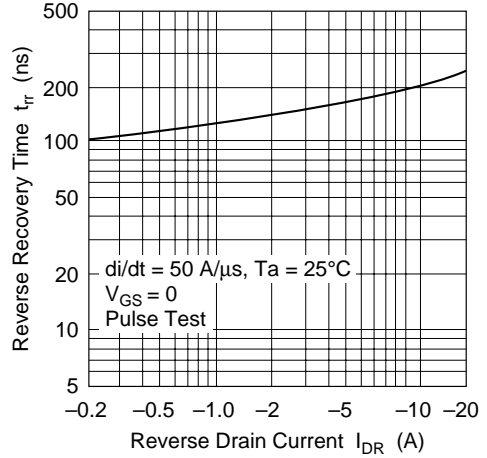


Typical Capacitance vs. Drain to Source Voltage

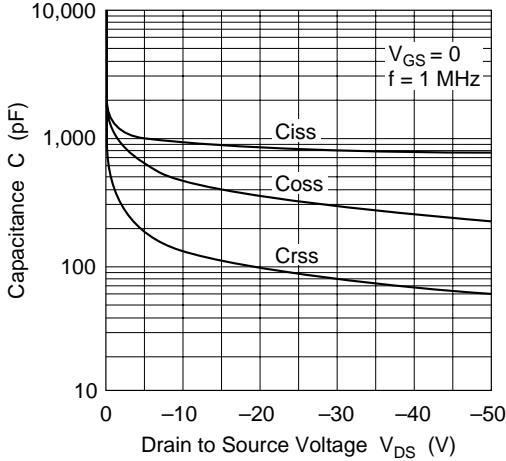


Dynamic Input Characteristics

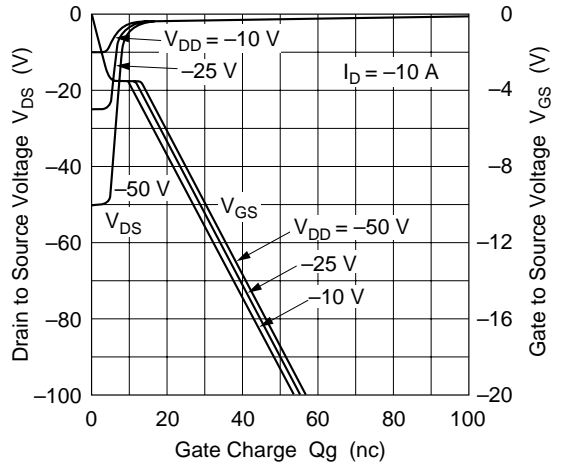


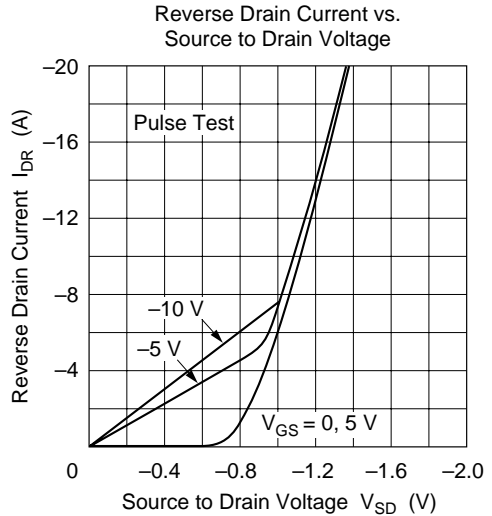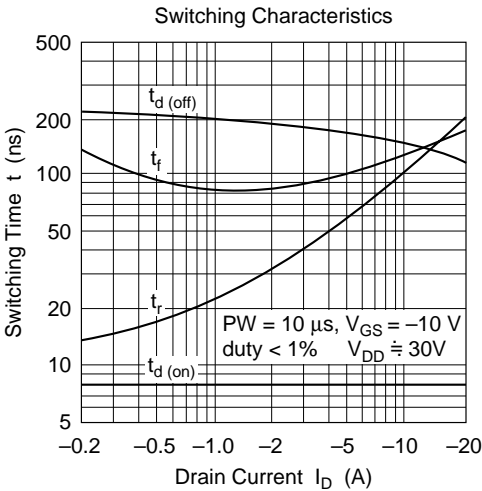


Maximum Safe Operation Area
(N-Channel)

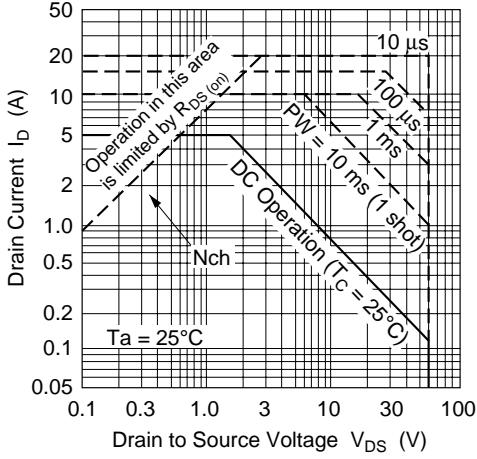


Typical Output Characteristics




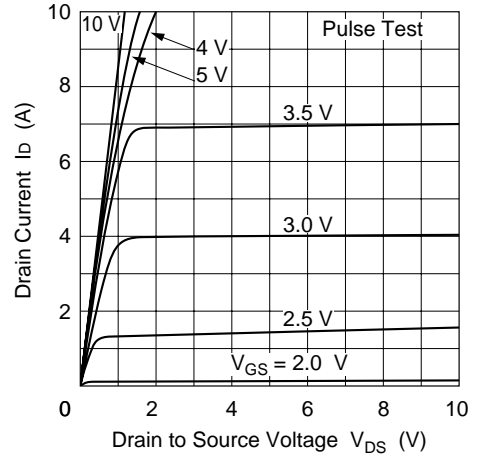


Typical Transfer Characteristics

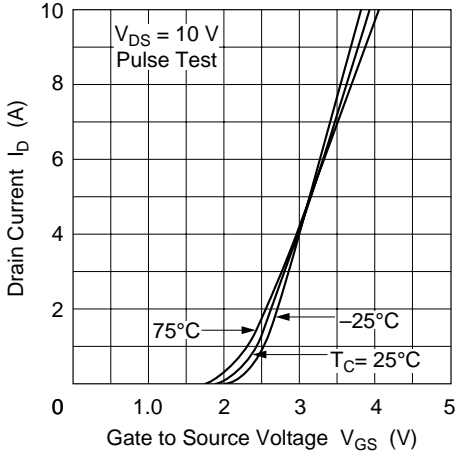


Drain to Source Saturation Voltage
vs. Gate to Source Voltage

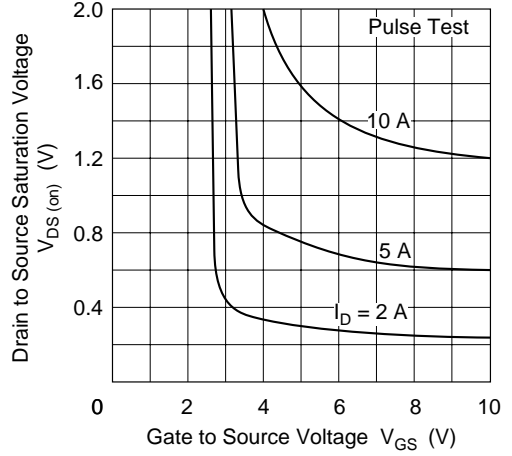


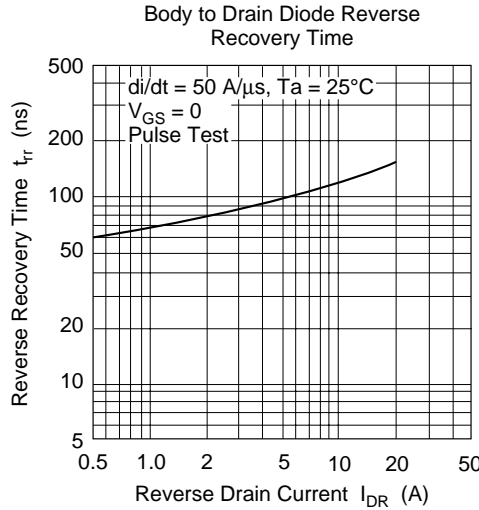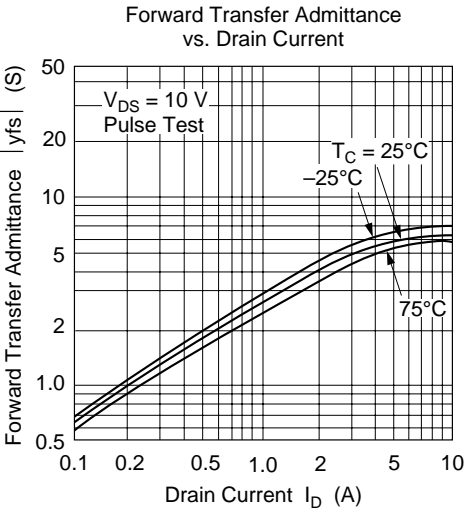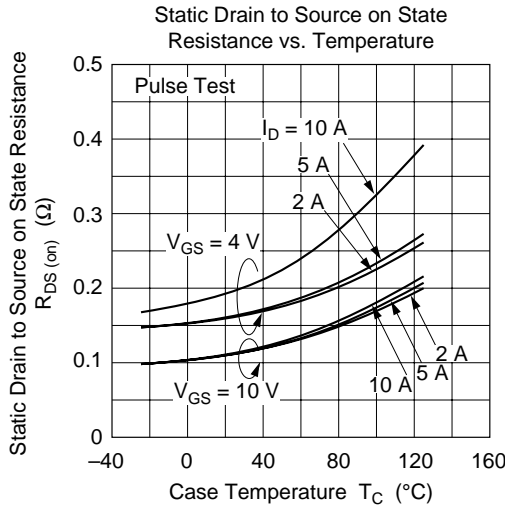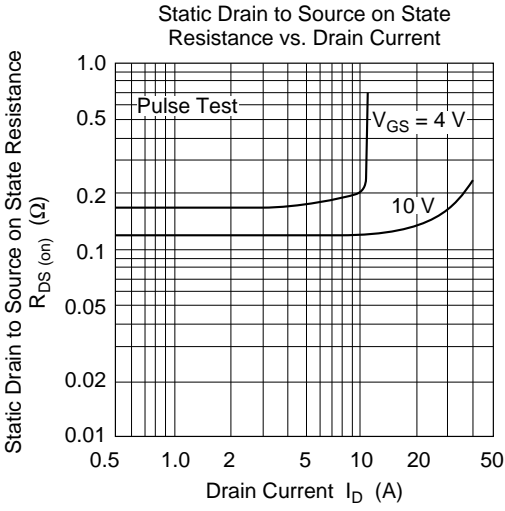


Typical Capacitance vs. Drain to Source Voltage

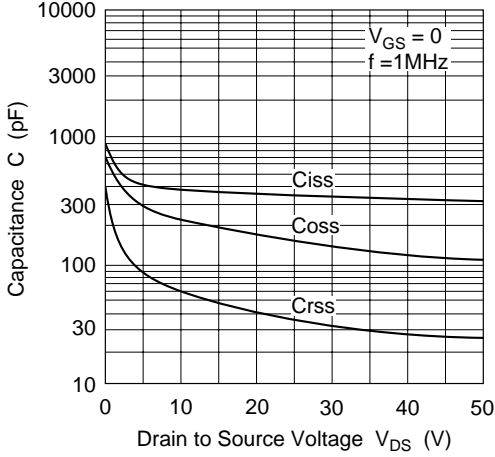


Dynamic Input Characteristics

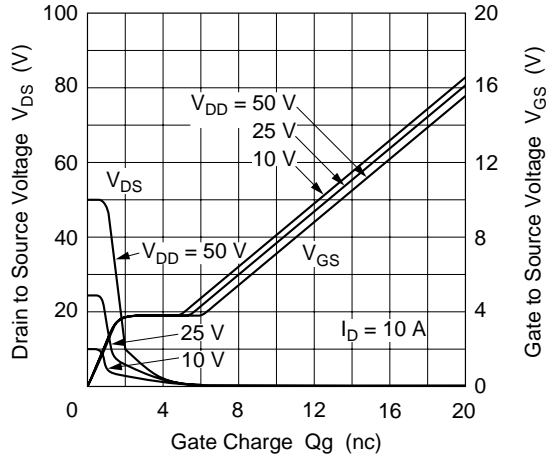

Switching Characteristics

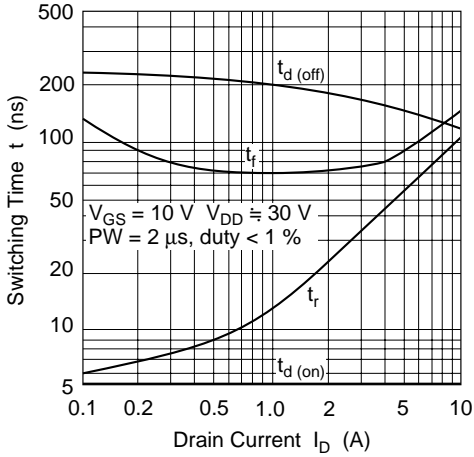


Reverse Drain Current vs. Source to Drain Voltage

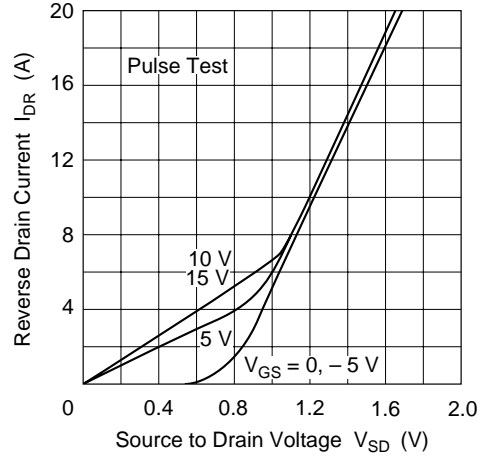

Package Dimensions

As of January, 2001
Unit: mm

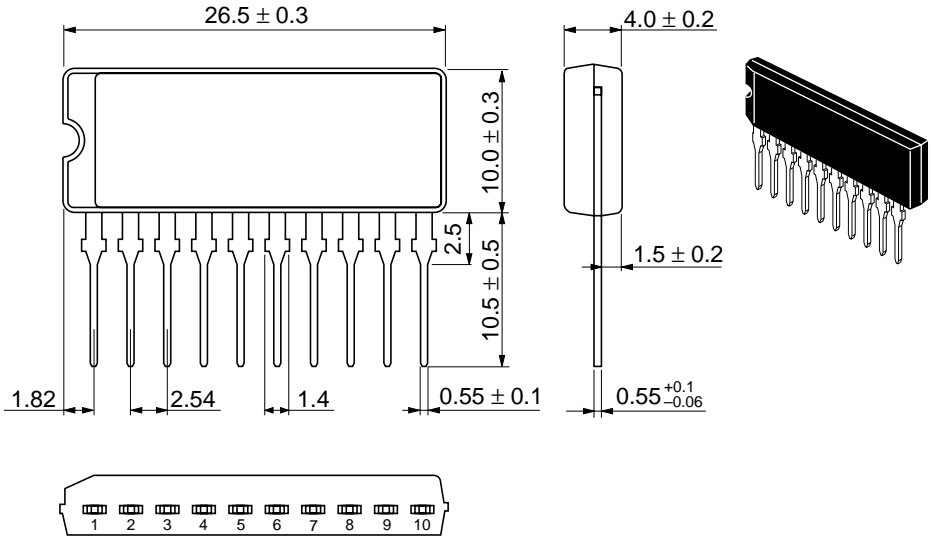

Hitachi Code	SP-10
JEDEC	—
EIAJ	—
Mass (reference value)	2.9 g

Cautions

1. Hitachi neither warrants nor grants licenses of any rights of Hitachi's or any third party's patent, copyright, trademark, or other intellectual property rights for information contained in this document. Hitachi bears no responsibility for problems that may arise with third party's rights, including intellectual property rights, in connection with use of the information contained in this document.
2. Products and product specifications may be subject to change without notice. Confirm that you have received the latest product standards or specifications before final design, purchase or use.
3. Hitachi makes every attempt to ensure that its products are of high quality and reliability. However, contact Hitachi's sales office before using the product in an application that demands especially high quality and reliability or where its failure or malfunction may directly threaten human life or cause risk of bodily injury, such as aerospace, aeronautics, nuclear power, combustion control, transportation, traffic, safety equipment or medical equipment for life support.
4. Design your application so that the product is used within the ranges guaranteed by Hitachi particularly for maximum rating, operating supply voltage range, heat radiation characteristics, installation conditions and other characteristics. Hitachi bears no responsibility for failure or damage when used beyond the guaranteed ranges. Even within the guaranteed ranges, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as fail-safes, so that the equipment incorporating Hitachi product does not cause bodily injury, fire or other consequential damage due to operation of the Hitachi product.
5. This product is not designed to be radiation resistant.
6. No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without written approval from Hitachi.
7. Contact Hitachi's sales office for any questions regarding this document or Hitachi semiconductor products.

HITACHI

Hitachi, Ltd.

Semiconductor & Integrated Circuits.
 Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan
 Tel: Tokyo (03) 3270-2111 Fax: (03) 3270-5109

URL	NorthAmerica	: http://semiconductor.hitachi.com/
	Europe	: http://www.hitachi-eu.com/hel/ecg
	Asia	: http://sicapac.hitachi-asia.com
	Japan	: http://www.hitachi.co.jp/Sicd/indx.htm

For further information write to:

Hitachi Semiconductor
 (America) Inc.
 179 East Tasman Drive,
 San Jose, CA 95134
 Tel: <1> (408) 433-1990
 Fax: <1> (408) 433-0223

Hitachi Europe GmbH
 Electronic Components Group
 Dornacher Straße 3
 D-85622 Feldkirchen, Munich
 Germany
 Tel: <49> (89) 9 9180-0
 Fax: <49> (89) 9 29 30 00

Hitachi Europe Ltd.
 Electronic Components Group.
 Whitebrook Park
 Lower Cookham Road
 Maidenhead
 Berkshire SL6 8YA, United Kingdom
 Tel: <44> (1628) 585000
 Fax: <44> (1628) 585160

Hitachi Asia Ltd.
 Hitachi Tower
 16 Collyer Quay #20-00,
 Singapore 049318
 Tel: <65>-538-6533/538-8577
 Fax: <65>-538-6933/538-3877
 URL: <http://www.hitachi.com.sg>

Hitachi Asia Ltd.
 (Taipei Branch Office)
 4/F, No. 167, Tun Hwa North Road,
 Hung-Kuo Building,
 Taipei (105), Taiwan
 Tel: <886>-(2)-2718-3666
 Fax: <886>-(2)-2718-8180
 Telex: 23222 HAS-TP
 URL: <http://www.hitachi.com.tw>

Hitachi Asia (Hong Kong) Ltd.
 Group III (Electronic Components)
 7/F., North Tower,
 World Finance Centre,
 Harbour City, Canton Road
 Tsim Sha Tsui, Kowloon,
 Hong Kong
 Tel: <852>-(2)-735-9218
 Fax: <852>-(2)-730-0281
 URL: <http://www.hitachi.com.hk>

Copyright © Hitachi, Ltd., 2000. All rights reserved. Printed in Japan.
 Colophon 2.0