


SMD Power Inductor CDC5D23B



Halogen
Free



Description

- Ferrite drum core construction.
- Magnetically unshielded.
- L × W × H: 6.0 × 6.0 × 2.5 mm Max.
- Product weight: 215mg(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Halogen Free available.

Environmental Data

- Operating temperature range: -40°C~+100°C (including coil's self temperature rise)
- Storage temperature range: -40°C~+100°C
- Solder reflow temperature: 260 °C peak.


Packaging

- Carrier tape and reel packaging
- 13.0" diameter reel
- 2000pcs per reel


Applications

- Ideally used in EL drive as EL lamp inverter inductors.

Dimension - [mm]

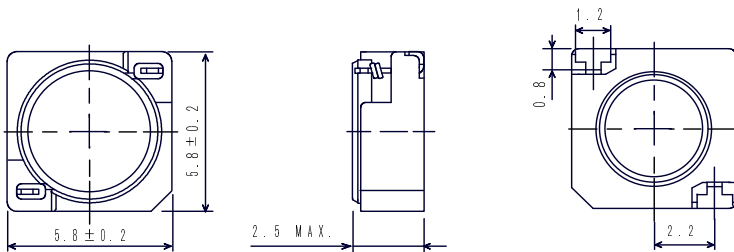

Schematics - [mm]



SMD Power Inductor CDC5D23B



Electrical Characteristics

Part Name	Stamp	Inductance (μ H) [Within] ※1	D.C.R.(m Ω) Max. (Typ.) (at20°C)	Rated current (A) ※2
CDC5D23BNP-2R2MC	2R2	2.2 μ H \pm 20%	39 (30)	2.16
CDC5D23BNP-2R7MC	2R7	2.7 μ H \pm 20%	44 (34)	2.08
CDC5D23BNP-3R3MC	3R3	3.3 μ H \pm 20%	49 (38)	1.90
CDC5D23BNP-3R9MC	3R9	3.9 μ H \pm 20%	56 (43)	1.84
CDC5D23BNP-4R7MC	4R7	4.7 μ H \pm 20%	62 (48)	1.60
CDC5D23BNP-5R6MC	5R6	5.6 μ H \pm 20%	78 (60)	1.44
CDC5D23BNP-6R8MC	6R8	6.8 μ H \pm 20%	91 (70)	1.36
CDC5D23BNP-8R2MC	8R2	8.2 μ H \pm 20%	103(87)	1.12
CDC5D23BNP-100LC	100	10 μ H \pm 15%	133(102)	1.04
CDC5D23BNP-120LC	120	12 μ H \pm 15%	148(114)	0.96
CDC5D23BNP-150KC	150	15 μ H \pm 10%	166(128)	0.88
CDC5D23BNP-180KC	180	18 μ H \pm 10%	213(164)	0.77
CDC5D23BNP-220KC	220	22 μ H \pm 10%	248(191)	0.73
CDC5D23BNP-270KC	270	27 μ H \pm 10%	328(252)	0.64
CDC5D23BNP-330KC	330	33 μ H \pm 10%	378(291)	0.58
CDC5D23BNP-390KC	390	39 μ H \pm 10%	438(337)	0.54
CDC5D23BNP-470KC	470	47 μ H \pm 10%	546(420)	0.49
CDC5D23BNP-560KC	560	56 μ H \pm 10%	621(478)	0.45
CDC5D23BNP-680KC	680	68 μ H \pm 10%	715(550)	0.41
CDC5D23BNP-820KC	820	82 μ H \pm 10%	1000(772)	0.35
CDC5D23BNP-101KC	101	100 μ H \pm 10%	1070(820)	0.33
CDC5D23BNP-121KC	121	120 μ H \pm 10%	1250(960)	0.32
CDC5D23BNP-151KC	151	150 μ H \pm 10%	1660(1280)	0.26
CDC5D23BNP-181KC	181	180 μ H \pm 10%	1900(1460)	0.23
CDC5D23BNP-221KC	221	220 μ H \pm 10%	2440(1880)	0.21
CDC5D23BNP-271KC	271	270 μ H \pm 10%	2730(2100)	0.19

※1. Inductance measuring condition: at 100 kHz.













※2. Rated current: The DC current at which the inductance decreases to 90 % of it's initial value or when $\Delta t = 40^\circ\text{C}$, whichever is lower (Ta=20°C)

SMD Power Inductor CDC5D23B



Saturation Current & Temperature Rise Graph

— L (20°C) — ΔT

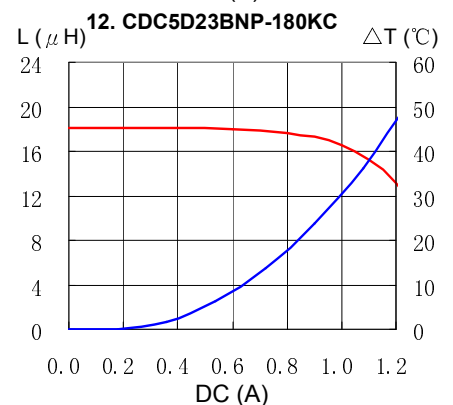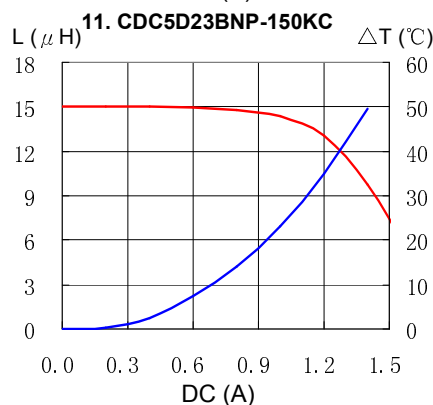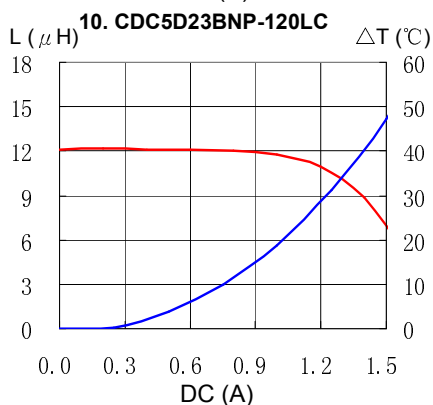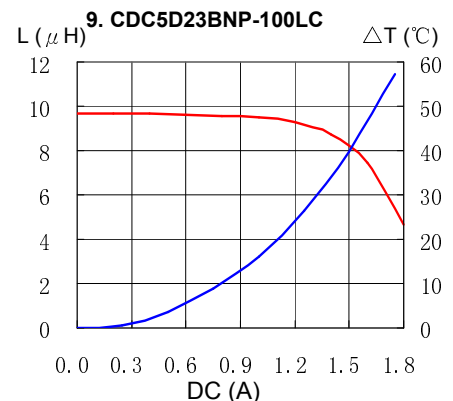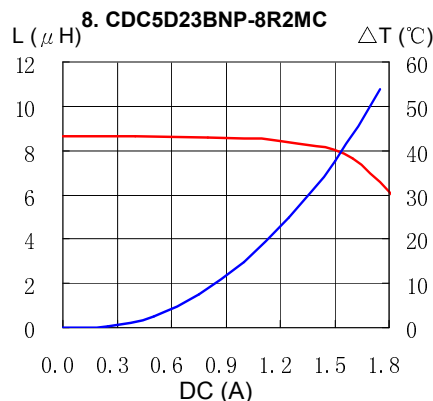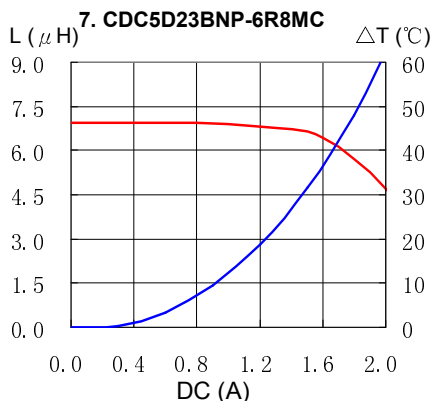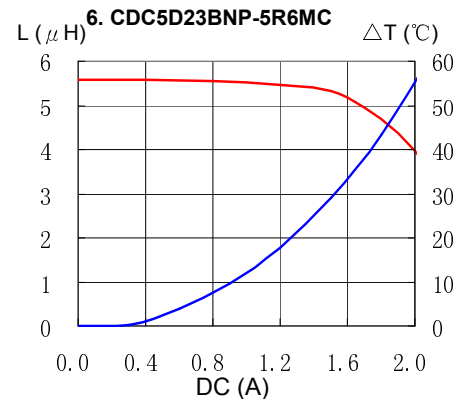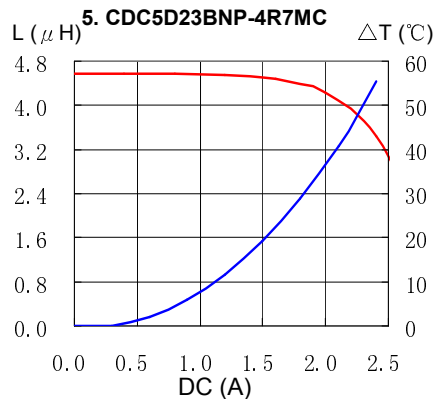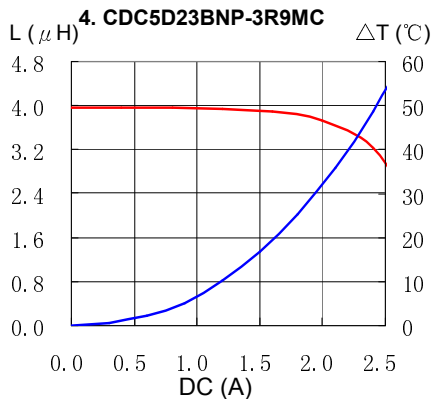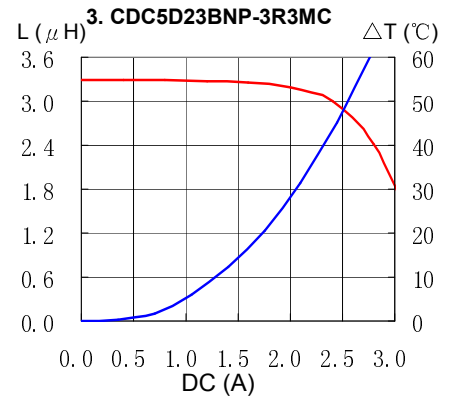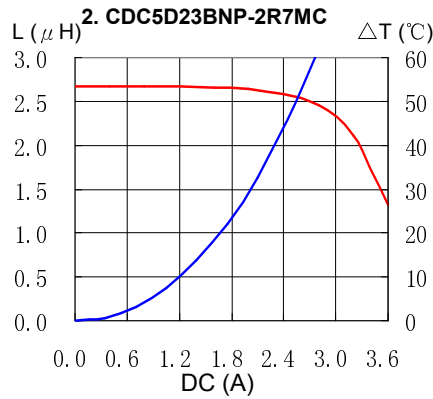
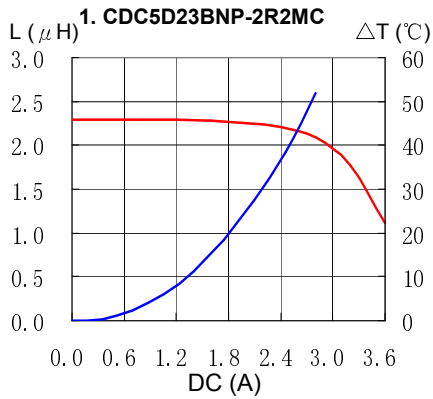


SMD Power Inductor CDC5D23B





Saturation Current & Temperature Rise Graph

— L (20°C) — ΔT

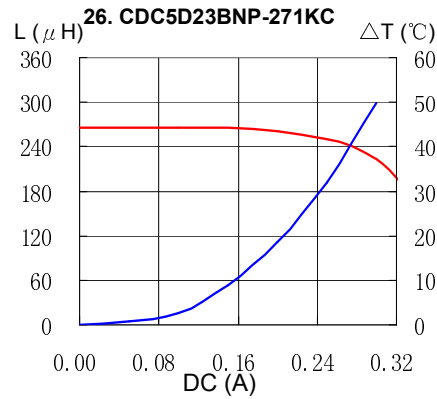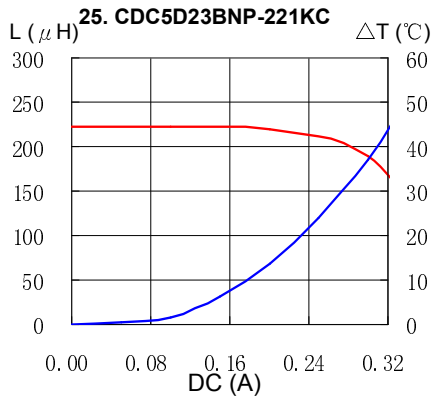

Solder Reflow Condition

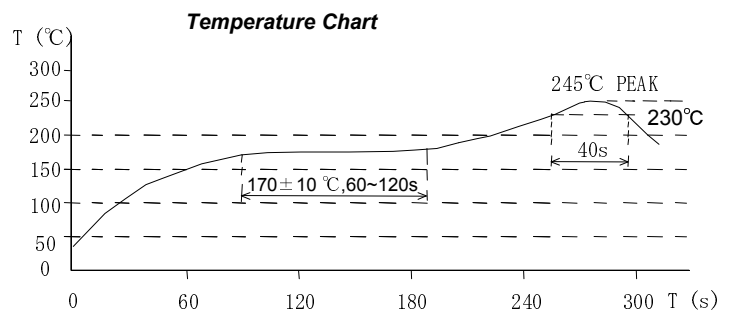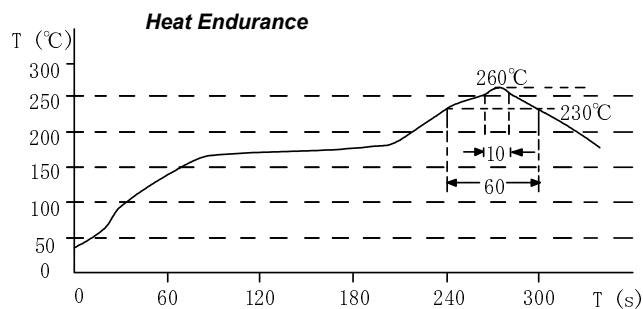

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong
Tel.+852-2880-6781
FAX.+852-2565-9600
sales@hk.sumida.com

Saitama(Japan)
Tel.+81-48-691-7300
FAX.+81-48-691-7340
sales@jp.sumida.com

Chicago
Tel.+1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai
Tel.+86-21-5836-3299
FAX.+86-21-5836-3266
shanghai.sales@cn.sumida.com

Seoul
Tel.+82-2-6237-0777
FAX.+82-2-6237-0778
sales@kr.sumida.com

Oberzell
Tel.+49-8591-937-0
FAX. +49-8591-937-103
contact@eu.sumida.com

Shenzhen
Tel.+86-755-8291-0228
FAX.+86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore
Tel.+65-6296-3388
FAX.+65-6841-4426
sales@sg.sumida.com

Neumarkt
Tel.+49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei
Tel.+886-2-8751-2737
FAX.+886-2-8751-2738
sales@tw.sumida.com

San Jose
Tel.+1-408-321-9660
FAX.+1-408-321-9308
sales@us.sumida.com