



BTB/BTA35

Discrete Triacs(Non-Isolated/Isolated)

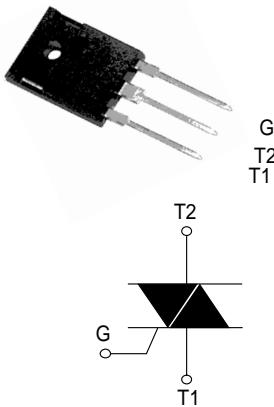

Dimensions TO-247AD

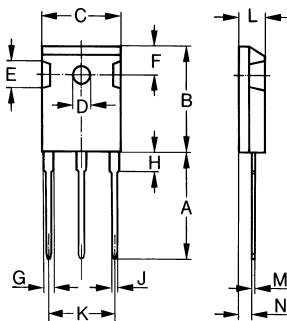

Dim.	Millimeter Min.	Millimeter Max.	Inches Min.	Inches Max.
A	19.81	20.32	0.780	0.800
B	20.80	21.46	0.819	0.845
C	15.75	16.26	0.610	0.640
D	3.55	3.65	0.140	0.144
E	4.32	5.49	0.170	0.216
F	5.4	6.2	0.212	0.244
G	1.65	2.13	0.065	0.084
H	-	4.5	-	0.177
J	1.0	1.4	0.040	0.055
K	10.8	11.0	0.426	0.433
L	4.7	5.3	0.185	0.209
M	0.4	0.8	0.016	0.031
N	1.5	2.49	0.087	0.102

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter			Value	Unit
$I_T(\text{RMS})$	RMS on-state current (full sine wave)	TO-247AD	$T_c = 80^\circ\text{C}$	35	A
I_{TSM}	Non repetitive surge peak on-state current (full cycle, T_j initial = 25°C)	$F = 60 \text{ Hz}$	$t = 16.7 \text{ ms}$	400	A
		$F = 50 \text{ Hz}$	$t = 20 \text{ ms}$	335	
I^2t	I^2t Value for fusing	$t_p = 10 \text{ ms}$		664	A^2s
dI/dt	Critical rate of rise of on-state current $I_G = 2 \times I_{GT}$, $t_r \leq 100 \text{ ns}$	$F = 120 \text{ Hz}$	$T_j = 125^\circ\text{C}$	50	$\text{A}/\mu\text{s}$
V_{DSM}/V_{RSM}	Non repetitive surge peak off-state voltage	$t_p = 10 \text{ ms}$	$T_j = 25^\circ\text{C}$	$V_{DRM}/V_{RRM} + 100$	V
I_{GM}	Peak gate current	$t_p = 20 \mu\text{s}$	$T_j = 125^\circ\text{C}$	4	A
$P_{G(AV)}$	Average gate power dissipation	$T_j = 125^\circ\text{C}$		1	W
T_{stg} T_j	Storage junction temperature range Operating junction temperature range			-40 to +150 -40 to +125	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_j = 25^\circ\text{C}$, unless otherwise specified)

Symbol	Test Conditions	Quadrant		Value	Unit
I_{GT} (1)	$V_D = 12 \text{ V}$ $R_L = 33 \Omega$	I - II - III IV	MAX.	50 100	mA
		ALL	MAX.	1.3	V
V_{GD}	$V_D = V_{DRM}$ $R_L = 3.3 \text{ k}\Omega$ $T_j = 125^\circ\text{C}$	ALL	MIN.	0.2	V
I_H (2)	$I_T = 500 \text{ mA}$		MAX.	120	mA
I_L	$I_G = 1.2 I_{GT}$	I-III-IV	MAX.	70	mA
		II		120	
dV/dt (2)	$V_D = 67\% V_{DRM}$ gate open $T_j = 125^\circ\text{C}$	MIN.		500	$\text{V}/\mu\text{s}$
(dI/dt)c (2)	Without snubber $T_j = 125^\circ\text{C}$	MIN.		10	A/ms

BTB/BTA35

Discrete Triacs(Non-Isolated/Isolated)

STATIC CHARACTERISTICS

Symbol	Test Conditions			Value	Unit
V_{TM} (2)	$I_{TM} = 60 \text{ A}$	$t_p = 380 \mu\text{s}$	$T_j = 25^\circ\text{C}$	MAX.	1.8
V_{to} (2)	Threshold voltage		$T_j = 125^\circ\text{C}$	MAX.	0.85
R_d (2)	Dynamic resistance		$T_j = 125^\circ\text{C}$	MAX.	10
I_{DRM}	$V_{DRM} = V_{RRM}$	$T_j = 25^\circ\text{C}$		5	μA
I_{RRM}		$T_j = 125^\circ\text{C}$		5	mA

Note 1: minimum IGT is guaranteed at 5% of IGT max.

Note 2: for both polarities of A2 referenced to A1

THERMAL RESISTANCES

Symbol	Parameter	Value	Unit
$R_{th(j-c)}$	Junction to case (AC)	0.97	$^\circ\text{C/W}$
$R_{th(j-a)}$	Junction to ambient	50	$^\circ\text{C/W}$

PRODUCT SELECTOR

Part Number	Voltage (xxx)	Sensitivity	Type	Package
	200 V ~ 1000 V			
BTB/BTA35	X X	50 mA	Standard	TO-247AD

OTHER INFORMATION

Part Number	Marking	Weight	Base quantity	Packing mode
BTB/BTA35	BTB/BTA35	4.5 g	120	Bulk