


UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
1027	A	INITIAL RELEASE	TJD	10-05
1159	B	REMOVE RIGHT ANGLE CONNECTOR	TJD	7-05

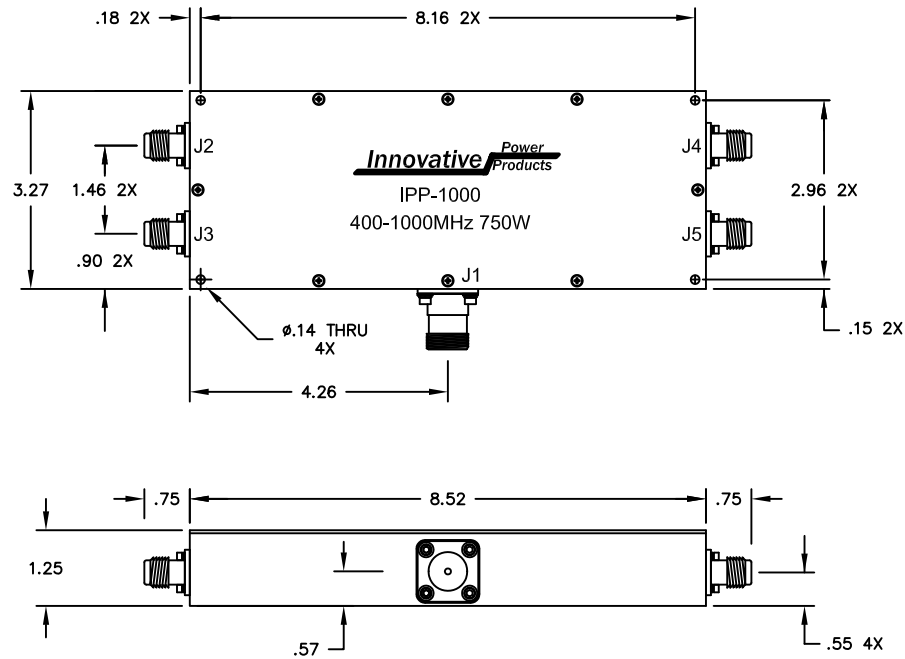

NOTES

- CONNECTOR J1: TYPE SC-F
CONNECTORS J2 - 4: TYPE TNC-F

ELECTRICAL SPECIFICATIONS

FREQUENCY: 400 - 1000 MHz.
 INSERTION LOSS: < 0.4dB
 VSWR: < 1.30:1
 PHASE BALANCE: < 5°
 ISOLATION: > 10dB
 AMPLITUDE BALANCE: < 0.2dB
 POWER: 750 WATT

MATERIAL	AL. ALLOY	DWN	DG	DATE	10/05	Innovative Power Products			
	6061-T651	ENG	TJD	DATE	10/05				
FINISH	CHEM FILM	MANUF	TP	DATE	10/05		TITLE		
	CLEAR IRRIDITE	CAGE CODE: 437R2			SCALE	2:1	OUTLINE, 4-WAY COMBINER 400-1000 MHz., 750W		
TOLERANCE	.XXX ±.005 .XX ±.02 ANG. ±1/2°	SHEET	OF	1	1	P/N	IPP-1000	REV.	B