

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [36648-0006](#)
Status: **Active**
Overview: [MLX™ Power Connectors](#)
Description: 2.13mm Diameter MLX™ Power Crimp Housing Plug, Nylon, 94V-2, 9 Circuit

Documents:

[3D Model](#) [Product Specification PS-42022-0001 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980
 UL E29179

General

Product Family Crimp Housings
 Series [36648](#)
 Application Power, Wire-to-Board, Wire-to-Wire
 Comments Current – Maximum per contact 20A if used with [36663](#) and [36664](#) terminal
 Overview [MLX™ Power Connectors](#)
 Product Name MLX™
 UPC 883906861520

Physical

Circuits (maximum) 9
 Circuits Detail 9
 Color - Resin Black
 Flammability 94V-2
 Gender Male
 Glow-Wire Compliant No
 Keying to Mating Part None
 Lock to Mating Part Yes
 Material - Resin Nylon
 Net Weight 5.351/g
 Number of Rows 3
 Packaging Type Bag
 Panel Mount No
 Pitch - Mating Interface 6.35mm
 Pitch - Termination Interface N/A
 Polarized to Mating Part Yes
 Stackable No
 Temperature Range - Operating -55°C to +105°C

Electrical

Current - Maximum per Contact 13.5A, 20A

Material Info

Reference - Drawing Numbers

Product Specification PS-42022-0001
 Sales Drawing SD-42021-**

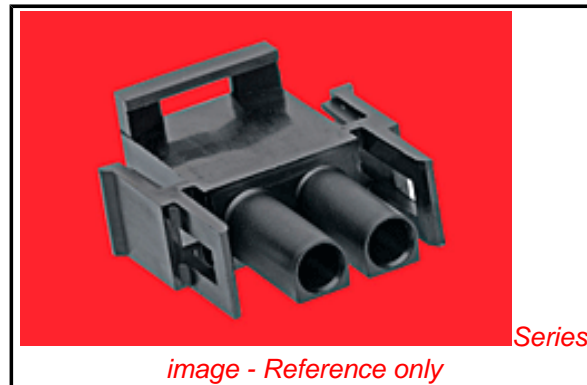


image - Reference only

EU RoHS

ELV and RoHS Compliant
REACH SVHC Contains SVHC: No
Low-Halogen Status Low-Halogen

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[36648Series](#)

Mates With

[42002](#) MLX™ Power Connector Header,
[42022](#) MLX™ Pin and Socket Receptacle,
[43255](#) MLX™ Power Connector Header

Use With

MLX Crimp Terminal [36663](#) , [36664](#) , [42023](#) , [42024](#)