
### C1608CH2E101J080AA



#### TDK item description C1608CH2E101JT\*\*\*\*

Applications	Commercial Grade	
Feature	Mid Mid Voltage (100 to 630V)	
Series	C1608 [EIA 0603]	
Status	Production	



	Size
Length(L)	1.60mm ±0.10mm
Width(W)	0.80mm ±0.10mm
Thickness(T)	0.80mm ±0.10mm
Terminal Width(B)	0.20mm Min.
Terminal Spacing(G)	0.30mm Min.
Recommended Land Pattern (PA)	0.70mm to 1.00mm(Flow Soldering)
	0.60mm to 0.80mm(Reflow Soldering)
Recommended Land Pattern (PB)	0.80mm to 1.00mm(Flow Soldering)
	0.60mm to 0.80mm(Reflow Soldering)
Recommended Land Pattern (PC)	0.60mm to 0.80mm(Flow Soldering)
	0.60mm to 0.80mm(Reflow Soldering)

Electrical Characteristics		
Capacitance	100pF ±5%	
Rated Voltage	250VDC	
Temperature Characteristic	CH(0±60ppm/°C)	
Q (Min.)	1000	
Insulation Resistance (Min.)	10000ΜΩ	


	Other
Soldering Method	Wave (Flow)
	Reflow
AEC-Q200	No
Packing	Punched (Paper)Taping [180mm Reel]
Package Quantity	4000pcs

! Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.


### C1608CH2E101J080AA



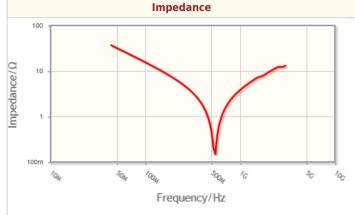



# ESR 10

Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

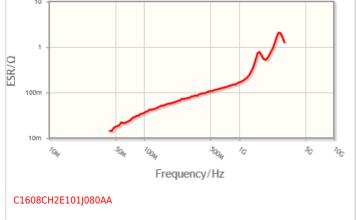


#### C1608CH2E101J080AA

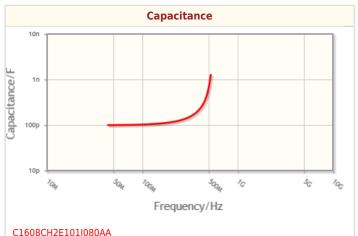

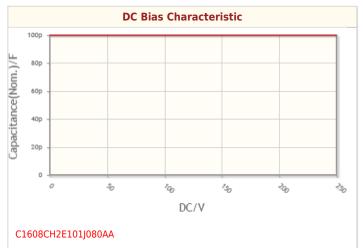

#### C1608CH2E101J080AA

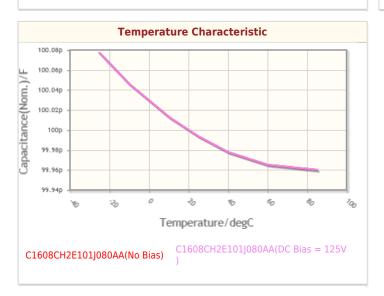

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.


! All specifications are subject to change without notice.

Copyright(c) TDK Corporation. All rights reserved.

## C1608CH2E101J080AA



## Associated Images

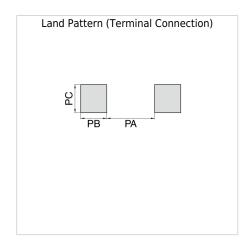

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.