


# Coaxial Diplexer

## ZDPL-4254-75-F+

75Ω 5 to 1700 MHz  
(5 - 42, 54-1700 MHz)

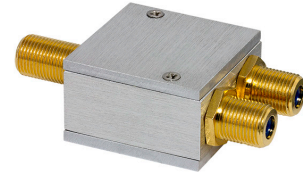

CASE STYLE: F2239

### The Big Deal

- Low insertion loss, 1 dB typical
- High rejection
- High crossover isolation
- Excellent return loss
- 75Ω Impedance
- Used in DOCSIS 3.1 standard test systems with extended range

### Product Overview

ZDPL-4254-75-F+ is a high performance diplexer with the lowpass port at 5-42 MHz and highpass port at 54-1700 MHz. Excellent return loss over extended frequency combined with high out of channel rejection makes it a ideal component in DOCSIS 3.1 test equipments, cable TV and multiband radio systems.

### Key Features

Feature	Advantages
Low passband insertion loss	Passband insertion loss 1 dB typical ensures low signal loss through the both channels.
Excellent stopband rejection	Co-channel rejection of 50 dB typical ensures unwanted spurious are eliminated
Excellent return loss at 5-42 and 54-1700 MHz	This makes signal transmission with less reflections and well- matched with the adjacent component used in the system.

#### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Coaxial Diplexer

## ZDPL-4254-75-F+

75Ω 5 to 1700 MHz (5-42, 54-1700 MHz)

### Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	30 dBm Max.

Permanent damage may occur if any of these limits are exceeded.

### Coaxial Connections


HIGH PASS PORT	3
LOW PASS PORT	2
COMMON PORT	1

### Features

- Low insertion loss
- Excellent return loss
- High rejection
- High cross over isolation
- 75Ω impedance

### Applications

- Cable TV and Multiband radio systems
- DOCSIS 3.1 test system with extended range

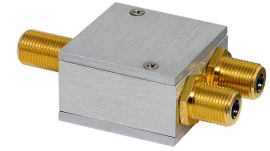


CASE STYLE: F2239

Connectors Model  
F-Female ZDPL-4254-75-F+  
BRACKET (OPTION "B")

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### Outline Drawing

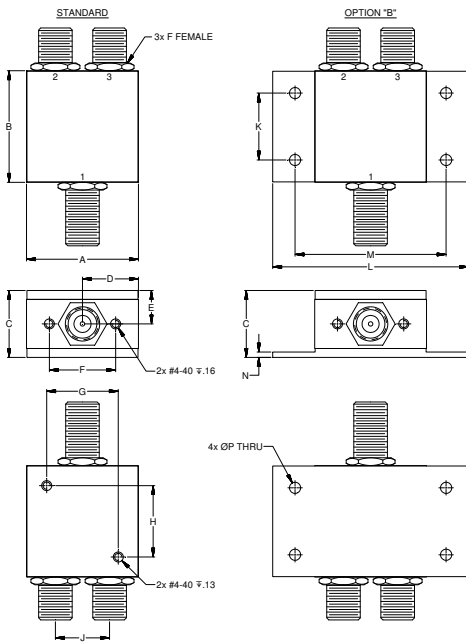

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
1.25	1.25	.75	.63	.38	.74	.80	.80
31.75	31.75	19.05	15.88	9.53	18.80	20.32	20.32
J	K	L	M	N	P	Wt.	
.61	.75	2.19	1.69	.06	.125	grams	
15.37	19.05	55.58	42.88	1.52	3.18	85	


### Electrical Specifications at 25°C

Parameter	Port	Frequency (MHz)	Min.	Typ.	Max.	Unit	
Pass Band	Insertion Loss	Low Pass	5-42	-	1.0	1.5	dB
		High Pass	54-1220	-	1.0	1.5	
	Return Loss	Low Pass	1220-1400	-	1.2	1.8	dB
			1400-1700	-	1.8	2.3	
		High Pass	5-42	20	24	-	
			Common	54-1220	17	22	
Stop Band	Isolation	1220-1400	17	22	-	dB	
		1400-1700	16	20	-		
		5-42	20	24	-		
Cross Over Isolation	LP-HP	54-1220	50	55	-	dB	
		1220-1700	45	50	-		
		5-42	44	50	-		

### Typical Performance Data at 25°C

FREQUENCY (MHz)	INSERTION LOSS (dB)		ISOLATION (dB)		RETURN LOSS (dB)	
	Low Pass Port	High Pass Port	LP-HP Port	Common Port	Low Pass Port	High Pass Port
1	0.02	76.62	78.13	46.55	45.94	0.00
5	0.06	62.80	62.30	36.04	36.98	0.00
20	0.16	65.98	67.23	27.72	28.12	0.05
42	0.87	50.97	51.65	44.21	31.32	0.57
45	4.13	41.64	44.56	7.19	6.08	1.01
46	7.05	33.73	42.73	4.55	3.40	1.13
46	8.32	31.15	42.24	3.97	2.82	1.19
47	12.86	24.24	41.60	2.89	1.71	1.37
47	14.57	22.18	41.54	2.70	1.50	1.45
48	22.29	15.02	41.80	2.47	1.01	1.91
48	29.20	10.65	42.86	2.82	0.84	2.57
49	37.40	7.19	44.78	3.77	0.73	3.72
50	50.93	3.57	50.24	6.99	0.62	7.13
52	65.91	1.36	66.46	18.43	0.51	18.16
54	65.00	0.91	64.95	40.05	0.44	32.12
100	68.16	0.30	67.83	34.57	0.34	37.18
250	67.14	0.30	67.56	30.29	0.26	34.61
500	68.71	0.39	68.50	24.57	0.31	24.92
1000	70.40	0.60	69.08	22.67	0.43	21.27
1220	72.19	0.75	69.09	23.66	0.54	22.66
1400	69.12	0.91	65.77	23.27	0.62	23.69
1700	53.10	1.65	53.87	23.02	1.21	36.13







### Functional Schematic

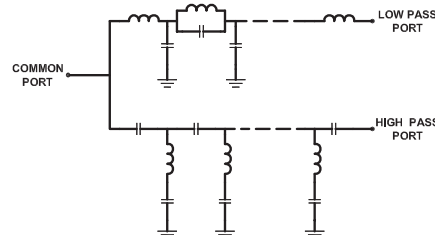

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



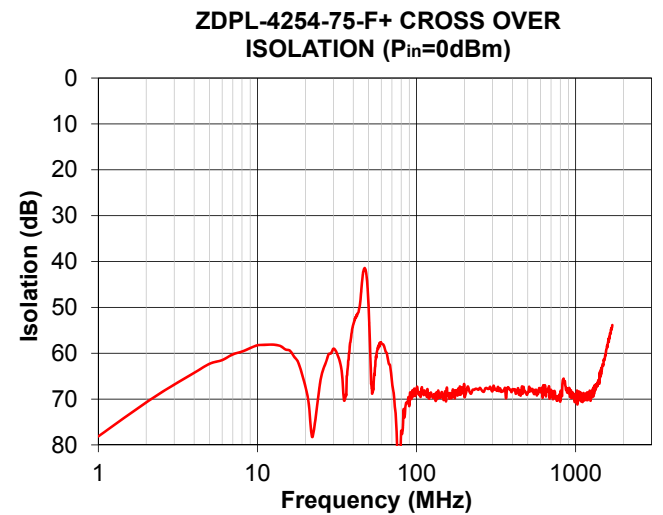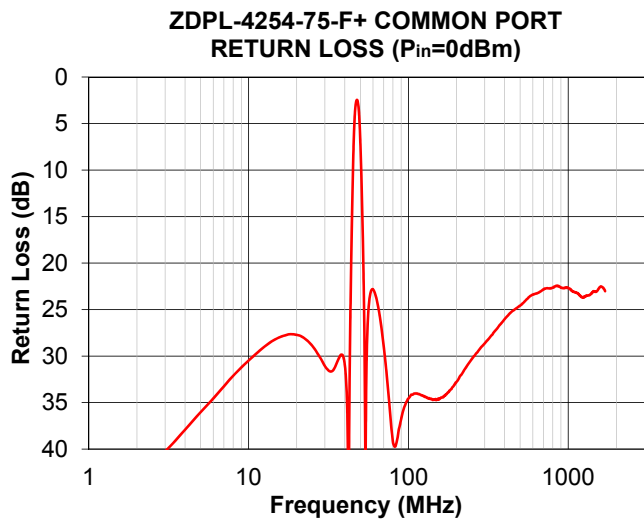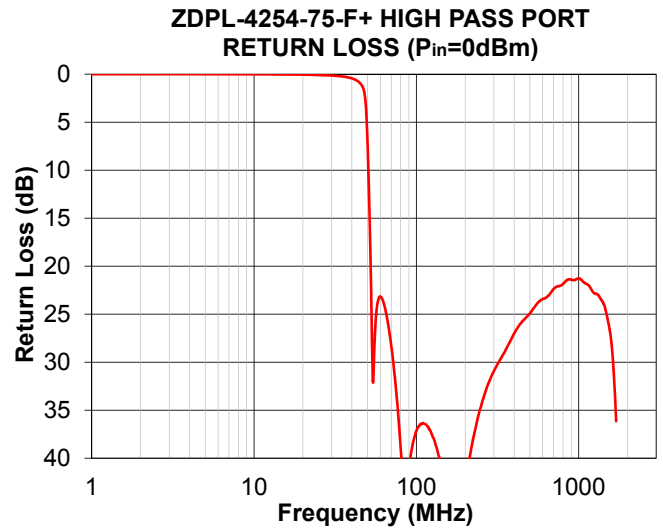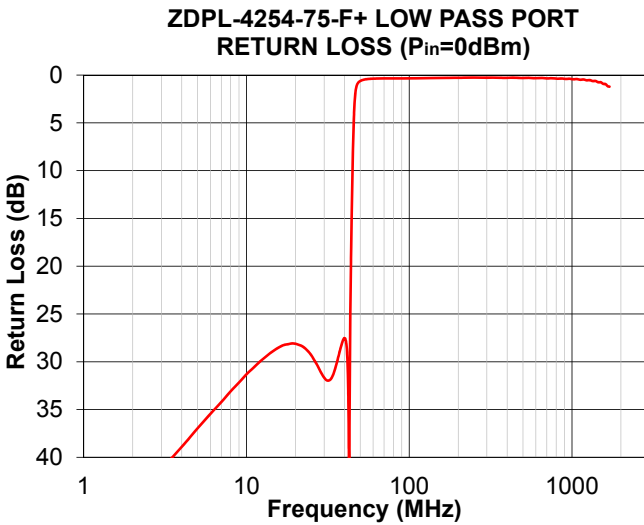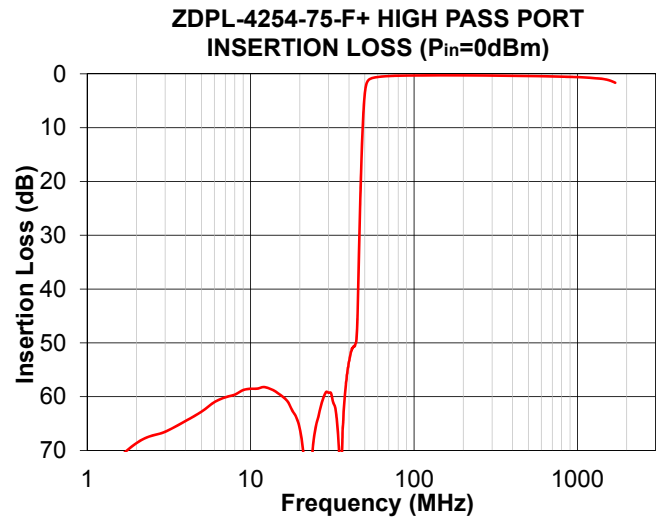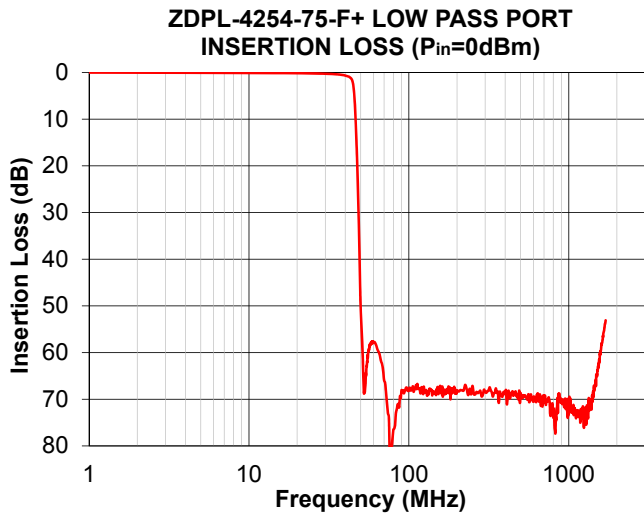

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

