

# MR850 - MR858

**PRV : 50 - 600 Volts**  
**Io : 3.0 Amperes**

## FEATURES :


- \* High current capability
- \* High surge current capability
- \* High reliability
- \* Low reverse current
- \* Low forward voltage drop
- \* Fast switching for high efficiency

## MECHANICAL DATA :

- \* Case : DO-201AD Molded plastic
- \* Epoxy : UL94V-O rate flame retardant
- \* Lead : Axial lead solderable per MIL-STD-202, Method 208 guaranteed
- \* Polarity : Color band denotes cathode end
- \* Mounting position : Any
- \* Weight : 1.16 grams

# FAST RECOVERY RECTIFIER DIODES

## DO-201AD

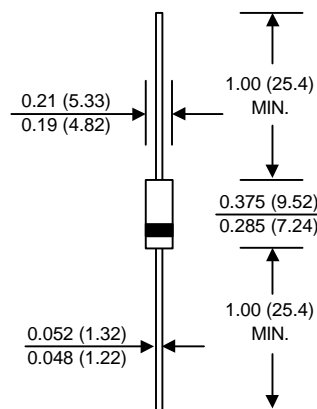

Dimensions in inches and ( millimeters )

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.  
 Single phase, half wave, 60 Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%.


RATING	SYMBOL	MR850	MR851	MR852	MR854	MR856	MR858	UNIT
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	400	600	800	V
Maximum RMS Voltage	V <sub>RMS</sub>	35	70	140	280	420	560	V
Maximum DC Blocking Voltage	V <sub>DC</sub>	50	100	200	400	600	800	V
Maximum Average Forward Current 0.375"(9.5mm) Lead Length Ta = 90 °C	I <sub>F(AV)</sub>	3.0						A
Peak Forward Surge Current, 8.3ms Single half sine wave Superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	100						A
Maximum Peak Forward Voltage at I <sub>F</sub> = 3.0 A	V <sub>F</sub>	1.25						V
Maximum DC Reverse Current Ta = 25 °C at Rated DC Blocking Voltage Ta = 100 °C	I <sub>R</sub>	10						μA
	I <sub>R(H)</sub>	150						μA
Maximum Reverse Recovery Time ( Note 1 )	T <sub>rr</sub>	150						ns
Typical Junction Capacitance ( Note 2 )	C <sub>J</sub>	28						pf
Junction Temperature Range	T <sub>J</sub>	- 65 to + 150						°C
Storage Temperature Range	T <sub>STG</sub>	- 65 to + 150						°C

### Notes :


- ( 1 ) Reverse Recovery Test Conditions : I<sub>F</sub> = 0.5 A, I<sub>R</sub> = 1.0 A, I<sub>rr</sub> = 0.25 A.
- ( 2 ) Measured at 1.0 MHz and applied reverse voltage of 4.0 V<sub>DC</sub>

## RATING AND CHARACTERISTIC CURVES ( MR850 - MR858 )


**FIG.1 - REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM**

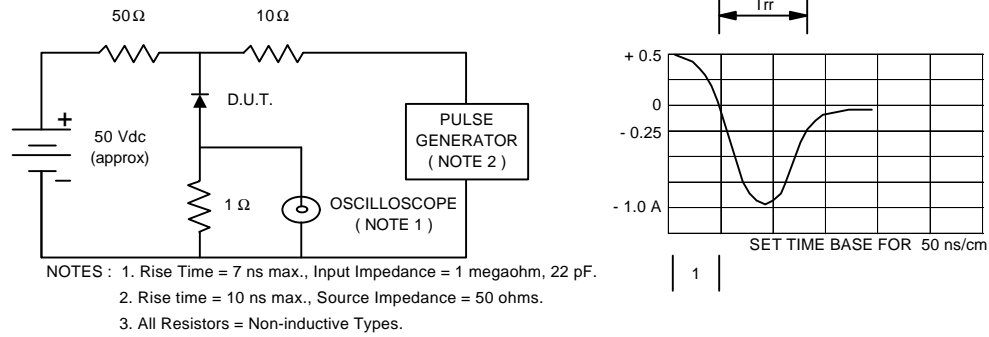


**FIG.2 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT**

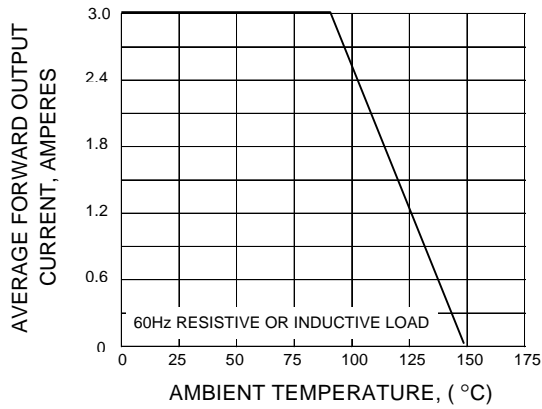

**FIG.3 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

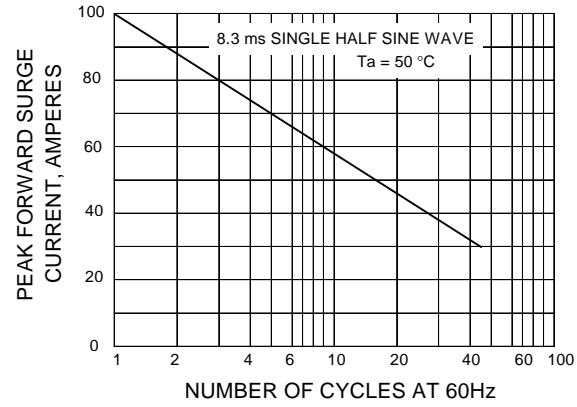

**FIG.4 - TYPICAL FORWARD CHARACTERISTICS**

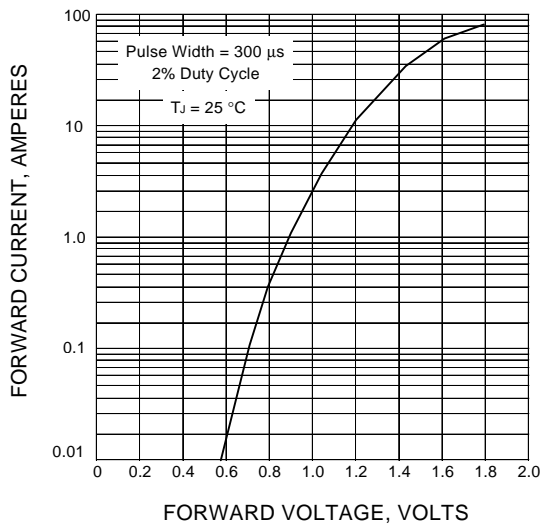

**FIG.5 - TYPICAL REVERSE CHARACTERISTICS**

