

规格书编号

SPEC NO :

产品规格书

SPECIFICATION

CUSTOMER 客户: _____
PRODUCT 产品: **LC FILTER**
MODEL NO 型号: **HD L2140**
PREPARED 编制: Zhouping CHECKED 审核: Houshihong
APPROVED 批准: CHARLES DATE 日期: 2008-04-08

客户确认 CUSTOMER RECEIVED:		
审核 CHECKED	批准 APPROVED	日期 DATE

无锡市好达电子有限公司
Shoulder Electronics Limited

1. FEATURES

Excellent rejection
 Good VSWR,1.5:1 typ. @ Passband


2. APPLICATIONS

Receivers/Transmitters
 PMR/PAMR
 Base station

3. ELECTRICAL SPECIFICATION


Operation temperature	-40°C to +85°C
Storage temperature	-55°C to +100°C
RF Power Input	0.5W max

3-1. Typical frequency response

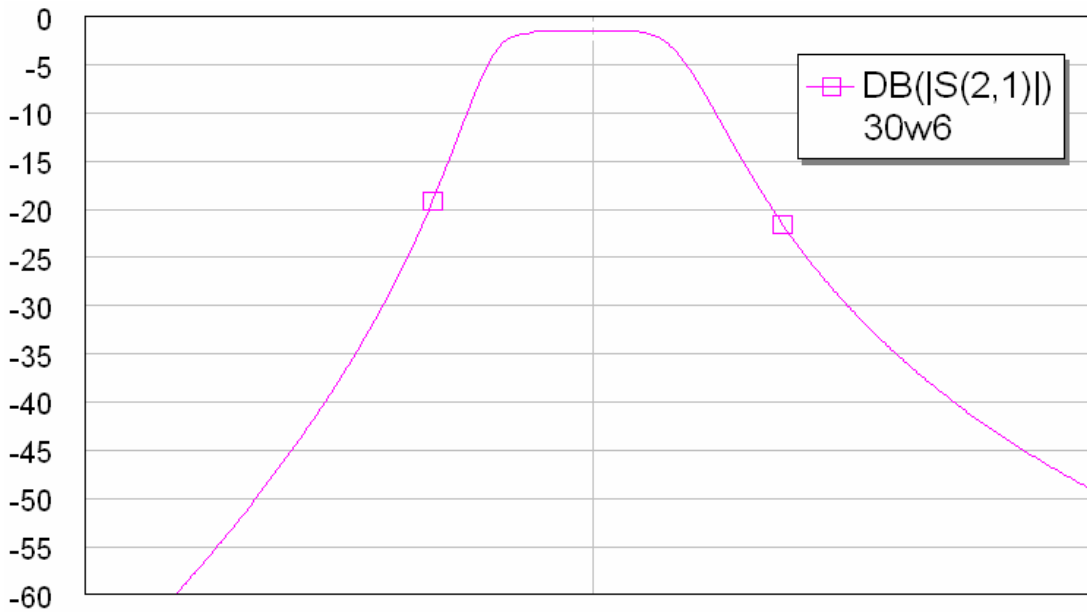


CENTER FREQ (MHz)	PASSBAN D (MHz)	STOPBANDS (MHz)					VSWR (:1)
		Loss<3.0dB	Loss>15dB	Loss>30dB	Loss>45dB	Loss>40dB	
210 .864	199.392-22 2.336	150-170	110-150	0-110 300-1000	1000-2000	2000-30 00	Passband Max 1.5

4. TEST CIRCUIT

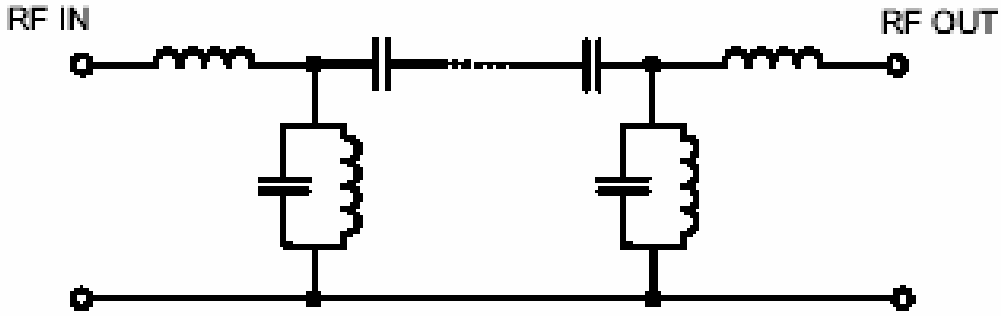

5. DIMENSION

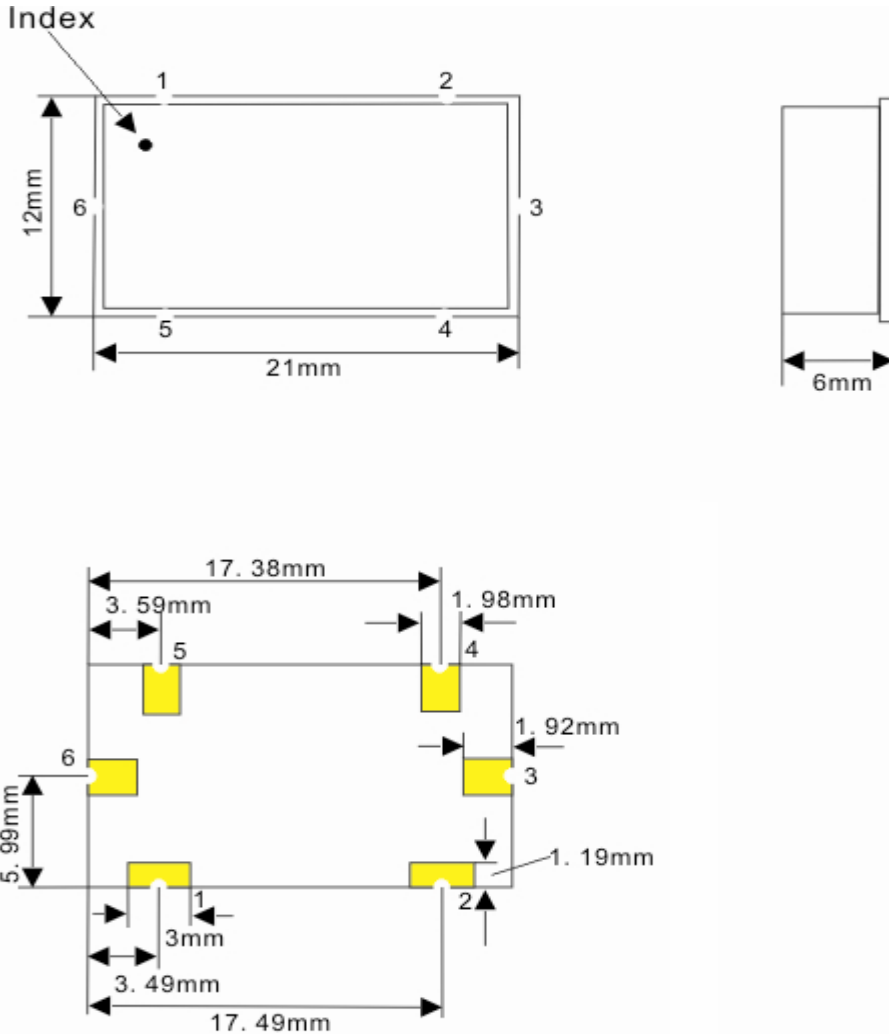

1	INPUT	4	GROUND
2	OUTPUT	5	GROUND
3	GROUND	6	GROUND