

P-tec Corp. Tel:(800)688-0613  
 2405 Commerce Circle Tel:(719) 589 3122  
 Alamosa Co. 81101 Fax:(719) 589 3592  
 www.p-tec.net sales@p-tec.net



## PD001 Series Single Digit Mini 7 Segment 0.3" Display

### Features

- \*Single Digit .3" (7.62mm) Red Display with 10 Pins
- \*Space Saving Small Body Size
- \*Low Current Requirements
- \*High Light Output
- \*IC Compatible
- \*High Reliability
- \*Gray Face, White Segments
- \*RoHS Compliant



### Absolute Maximum Ratings at T<sub>A</sub> = 25°C

Power Dissipation.....	90mW
Reverse Voltage (<100µA).....	5.0V
Max Forward Current.....	30mA
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width).....	100mA
Operating Temperature Range.....	-25°C to +85°C
Storage Temperature Range.....	-40°C to +100°C
Soldering Temperature (1.6 mm below body).....	260°C for 5 seconds

### Electrical & Optical Characteristics at T<sub>A</sub> = 25°C

Part Number		Emitting Color	Chip Material	Peak Wave Length	Dominant Wave Length	Forward Voltage @20mA (V)		Luminous Intensity @10mA (mcd)	
						Typ	Max	Min	Typ
Common Anode	Common Cathode			nm	nm				
PD001-CADR24	PD001-CCDR24	Red	GaP	700	650	2.1	3.0	1.0	2.0

All dimensions are in **Millimeters**. Tolerance is ± 0.25mm unless otherwise specified. The Slope Angle of any Pin may be ± 5° max.

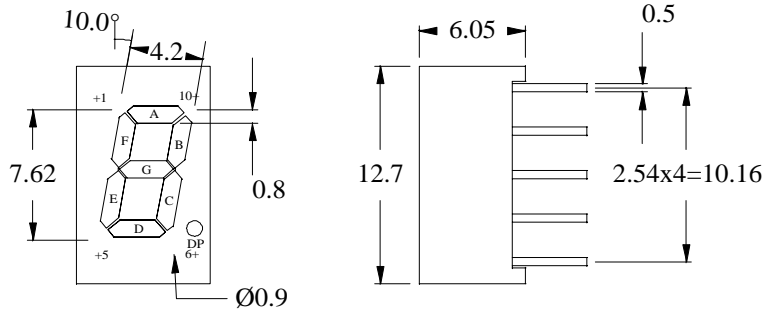

Pin Function	
Common Anode Pin #	Common Cathode Pin #
1 Common Anode	1 Common Cathode
2 Cathode F	2 Anode F
3 Cathode G	3 Anode G
4 Cathode E	4 Anode E
5 Cathode D	5 Anode D
6 Common Anode	6 Common Cathode
7 Cathode DP	7 Anode DP
8 Cathode C	8 Anode C
9 Cathode B	9 Anode B
10 Cathode A	10 Anode A