



KI SEMICONDUCTOR CO.

POWER RECTIFIER

70HF(R) series

Reverse Voltage - 100 to 1600 Volts

Forward Current - 70.0 Amperes

Features

- High surge current capability
- Designed for a wide range of applications
- Stud cathode and stud anode version
- Leaded version available
- Types up to 1600V V_{RRM}



case style
DO-203AB (DO-5)

Typical Applications

- Battery charges
- Converters
- Power supplies
- Machine tool controls

Mechanical Data

- **Case:** DO-203AB(DO-5)
- **Polarity:** Selection available
- **Weight:** 17 grams

Major Ratings and Characteristics

Parameters		70HF(R)		Units
		10 to 120	140 to 160	
$I_{F(AV)}$		70	70	Amps
	@ T_C	140	110	$^{\circ}C$
$I_{F(RMS)}$		110		Amps
I_{FSM}	@50Hz	1200		Amps
	@60Hz	1250		Amps
I^2t	@50Hz	7100		A^2s
	@60Hz	6540		A^2s
V_{RRM}	range	100 to 1200	1400 to 1600	Volts
T_J	range	-65 to 180	-65 to 150	$^{\circ}C$

ELECTRICAL SPECIFICATIONS

Voltage Ratings

Type number	Voltage Code	V _{RRM} maximum repetitive peak reverse voltage Volts	V _{RSM} maximum non-repetitive peak reverse voltage Volts	V _{R(BR)} minimum avalanche voltage Volts ⁽¹⁾	I _{RRM} max. @T _J =T _J max. mA
70HF(R)	10	100	200	-	15
	20	200	300	-	
	40	400	500	500	
	60	600	720	725	9
	80	800	960	950	
	100	1000	1200	1150	
	120	1200	1440	1350	4.5
	140	1400	1650	1550	
160	1600	1900	1750		

(1) Avalanche version only available from V_{RRM} 400V to 1600V.

Forward Conduction

Parameter		70HF(R)		Units	Conditions		
		10 to 120	140 to 160				
I _{F(AV)}	Max. average forward current @ Case temperature	70	70	Amps	180° conduction, half sine wave		
		140	110	°C			
I _{F(RMS)}	Max. RMS forward current	110		Amps			
I _{FSM}	Max. peak, one-cycle forward, non-repetitive surge current	1200		Amps	t=10ms	No voltage reapplied	Sinusoidal half wave Initial T _J =T _J max.
		1250			t=8.3ms		
		1000			t=10ms	100% V _{RRM} reapplied	
		1050			t=8.3ms		
I ² t	Maximum I ² t for fusing	7100		A ² S	t=10ms	No voltage reapplied	
		6450			t=8.3s		
		5000			t=10ms	100% V _{RRM} reapplied	
		4550			t=8.3ms		
V _{FM}	Max. forward voltage drop	1.35		Volts	I _{PK} =220A, T _J =25°C, t _p =400us rectangular wave		

Thermal and Mechanical Specifications


Parameter	70HF(R)		Units	Conditions
	10 to 120	140 to 160		
T _J Max. junction operating temperature range	-65 to 180	-65 to 150	°C	
T _{stg} Max. storage temperature range	-65 to 180	-65 to 150		
R _{thJC} Max. thermal resistance, junction to case	0.45		K/W	DC operation
R _{thCS} Max. thermal resistance, case to heatsink	0.25			Mounting surface, smooth, flat and greased
T Max. allowed mounting torque 10%	2.3-2.4		Nm	Not lubricated threads
	20-30		lbf-in	
wt approximate weight	17 (0.6)		g(oz)	
Case style	DO-203AB (DO-5)		See Outline Table	

Ordering information Table

Device Code: 70 HF R 160 M
 1 2 3 4 5

1. 70 - Standard device
2. HF - Standard diode
3. None - stud normal polarity (cathode to stud)
 R - stud reverse polarity (Anode to stud)
4. Voltage code: code x 10=V_{RRM}
5. None - stud base DO-203AB (DO-5) 1/4" 28 UNF-2A
 M - stud base DO-203AB (DO-5) M6x1

Outlines Table

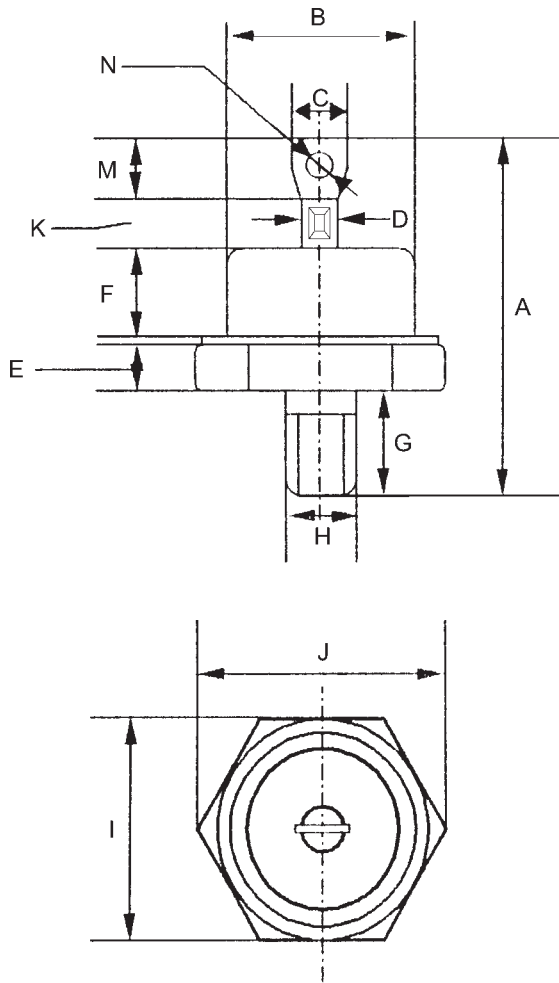

70HF(R)

Case Style DO-203AB(DO-5)
All dimensions in millimeters(inches)

DIMENSIONS			
DIM	inches	mm	Note
A		34.06	
B		12.83	
C		6.48	
D		3.68	
E		3.30	
F		5.92	
G		11.10	
H		5.84	
I		17.27	
J		19.05	
K		5.38	
M		7.42	
N		φ3.8	

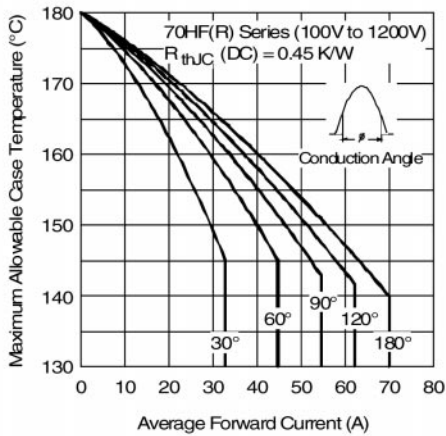


Fig. 1 - Current Ratings Characteristics

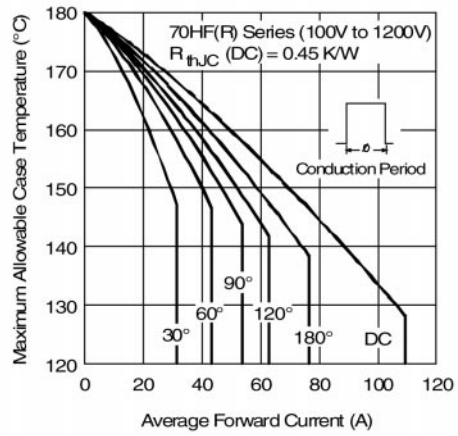


Fig. 2 - Current Ratings Characteristics

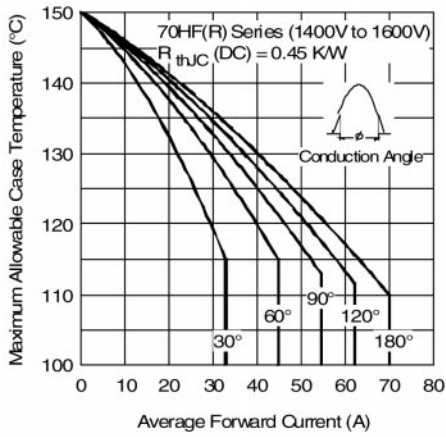


Fig. 3 - Current Ratings Characteristics

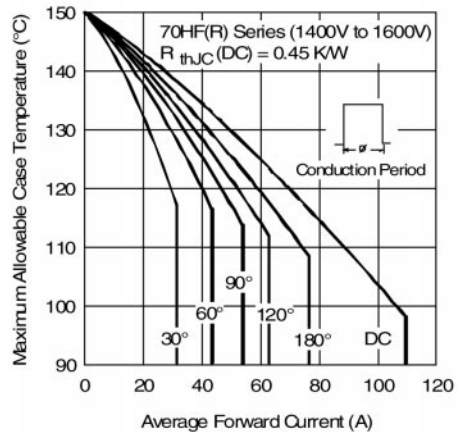


Fig. 4 - Current Ratings Characteristics

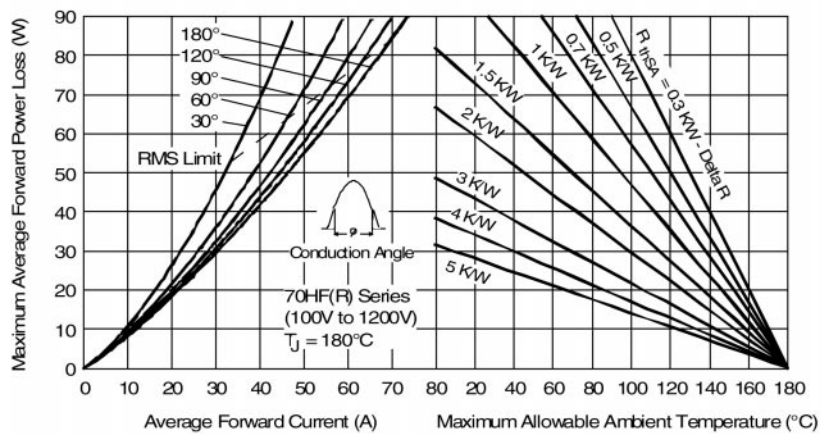


Fig. 5 - Forward Power Loss Characteristics

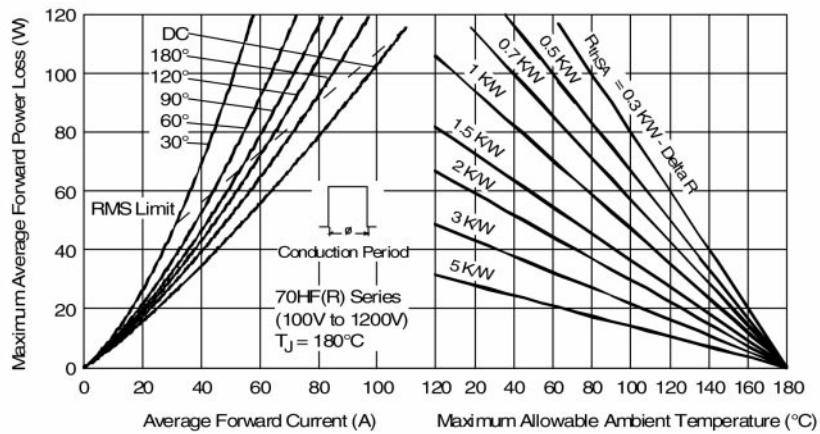


Fig. 6 - Forward Power Loss Characteristics

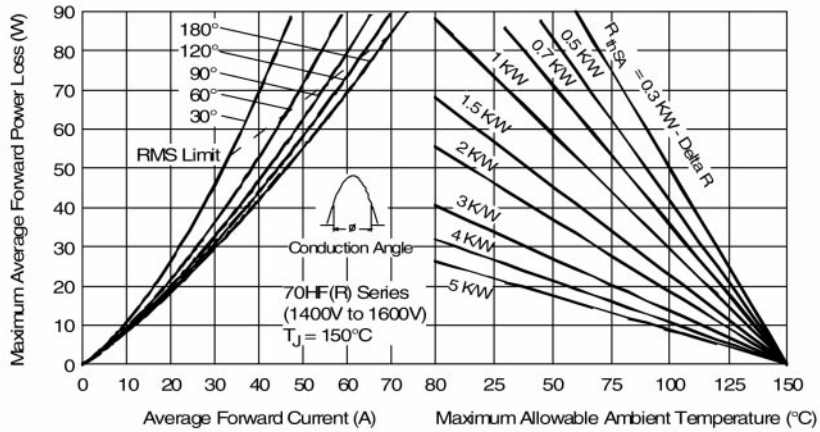


Fig. 7 - Forward Power Loss Characteristics

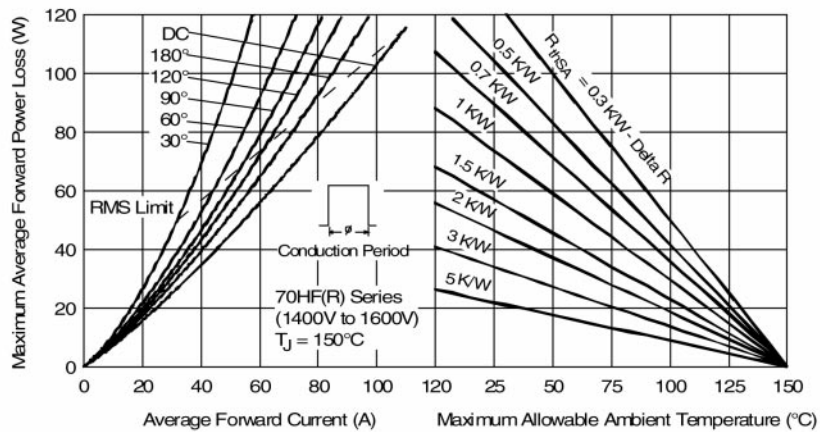


Fig. 8 - Forward Power Loss Characteristics

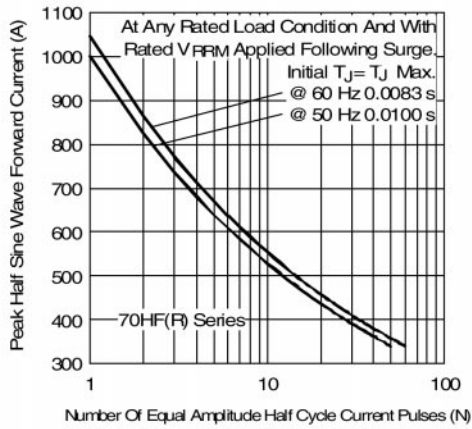


Fig. 9 - Maximum Non-Repetitive Surge Current

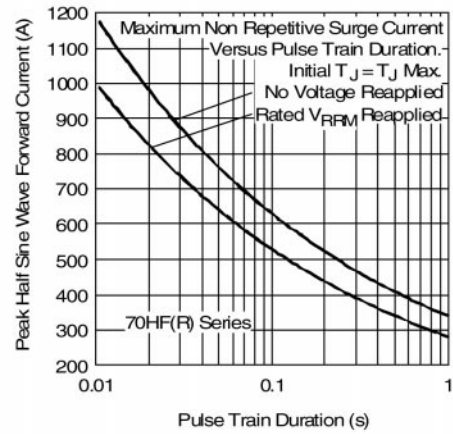


Fig. 10 - Maximum Non-Repetitive Surge Current

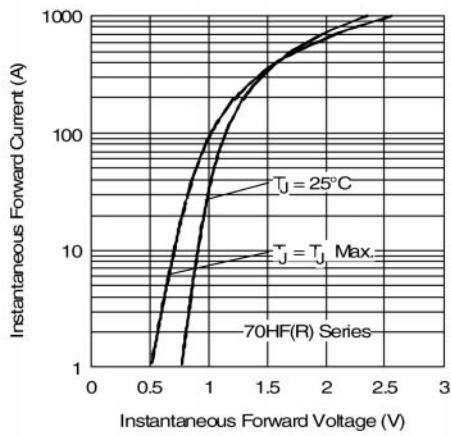


Fig. 11 - Forward Voltage Drop Characteristics

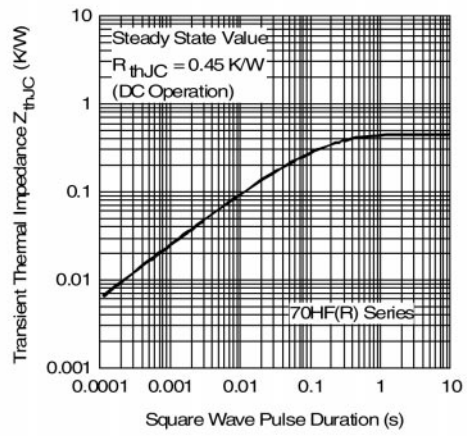


Fig. 12 - Thermal Impedance Z_{thJC} Characteristics