


Spec Sheet

SMD Power Inductors for Automotive / Industrial Applications (NR series H type / V type / S type)

NRS5030T4R7MMGJV

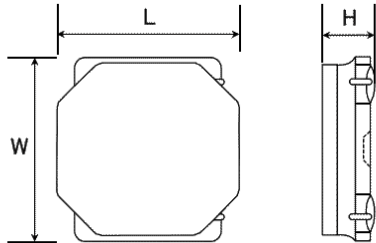

■ Features

- Item Summary
4.7 μ H(\pm 20%), 3100mA, 2600mA
- Lifecycle Stage
Mass Production
- AEC-Q200 qualified
- Standard packaging quantity (minimum)
Taping 500pcs

■ Products characteristics table

| | |
|---|-------------------------|
| CaseSize (EIA/JIS) | -/5050 |
| Inductance | 4.7 μ H(\pm 20%) |
| Inductance Measuring Frequency | 100kHz |
| Rated Current -Saturation Current | 3100mA |
| Rated Current -Temperature Rise Current | 2600mA |
| DC Resistance (max) | 0.0455 Ω |
| Avg. of DC.Resistance | 0.035 Ω |
| Self-resonant Frequency (min) | 31MHz |
| RoHS Compliance | Yes |
| Halogen Free | Yes |
| Soldering Method | Reflow |


■ External Dimensions

| | |
|---|-----------------|
| L | 4.9mm \pm 0.2 |
| W | 4.9mm \pm 0.2 |
| H | 3.1mm max |

■ Recommended Land Patterns

【推奨ランドパターン】
 実装上の注意
 ・実装状態を確認の上で使用ください。実装前にお買い上げの製品を確認してください。
 ・本製品のほんだ付けはフラットハンダ工法に準じます。

【Recommended Land Patterns】
 Surface Mounting
 ・Mounting and soldering conditions should be checked beforehand
 ・Applicable soldering process to these products is reflow soldering only.



SMD Power Inductors (NR series/NR series H type/S type /V type)

| Type | A | B | C |
|------------------|-----|-----|---|
| NRS010 | | | |
| NRS012 | | | |
| NRS014 | | | |
| NRS020 | 1.5 | 3.6 | 4 |
| NRS024 | | | |
| NRS030 | | | |
| NR 5040, NRS5040 | | | |

unit:mm

The data is reference only. Electrical characteristics vary depending on environment or measurement condition.
 TAIYO YUDEN reserves the right to make change to the Date at any time without notice.
 Before making final selection, please check product specification.

2015.03.06